

I. MATERIALS


- A. ANCHOR BOLT EXTENSION SHALL BE THE SAME DIAMETER AS THE EXISTING BOLT, THREADED ON BOTH ENDS, LENGTH AS REQUIRED.
- B. THE CONDUIT SHALL BE THE SAME TYPE AND SIZE AS THE EXISTING CONDUIT.
- C. CONCRETE SHALL BE ITEM 499 CLASS C.

II. INSTALLATION

INSTALLATION SHALL BE AS SHOWN.

III. BASIS OF PAYMENT

ITEM	UNIT	DESCRIPTION
MIS-205	LINEAR FOOT	EXTEND EXISTING LIGHT POLE FOUNDATION

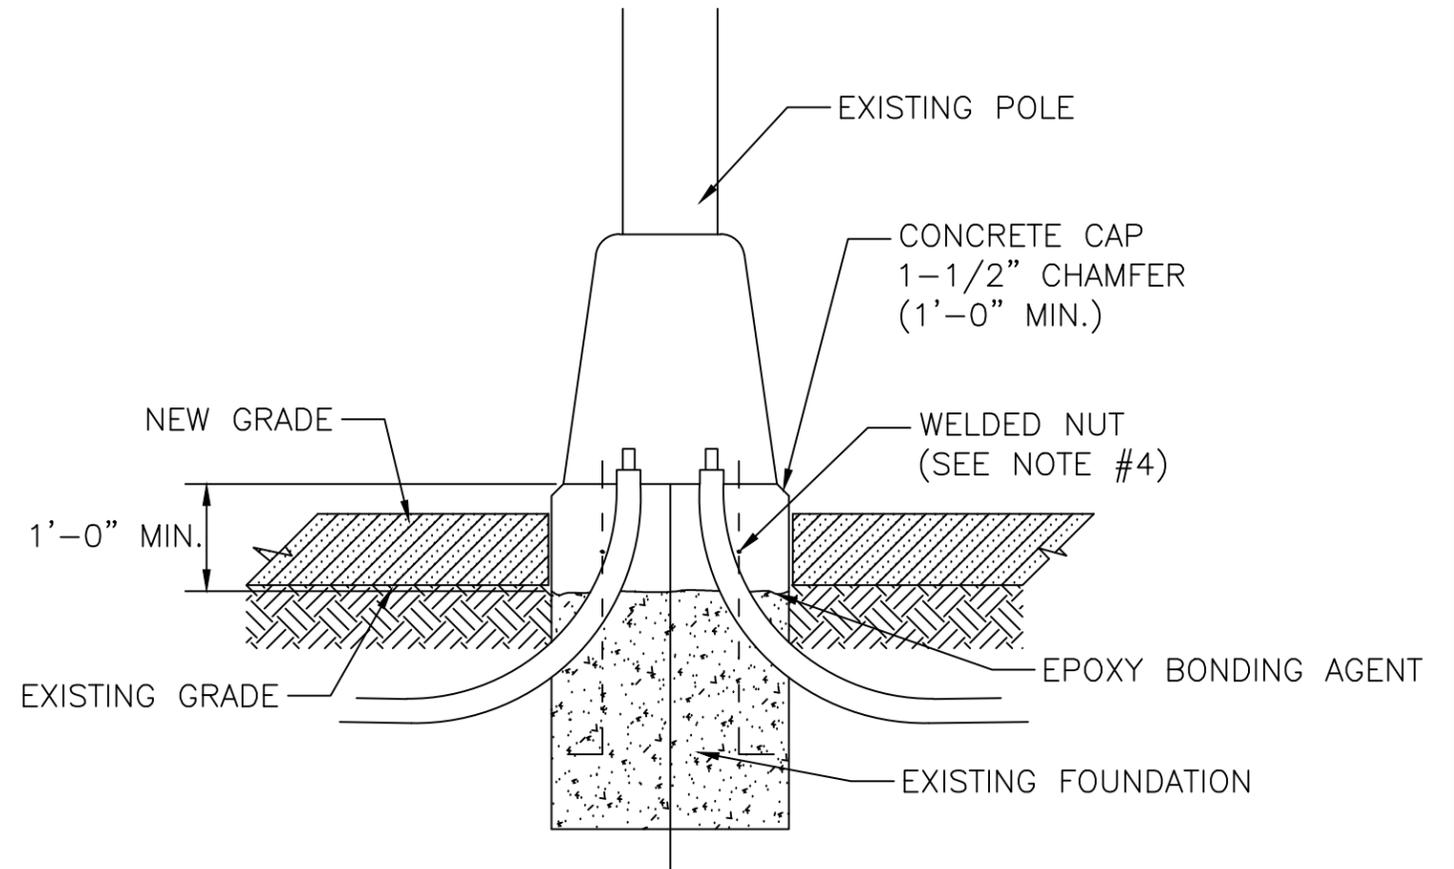

NOTES:

1. REMOVE POLE
2. REMOVE CONCRETE AS REQUIRED FOR MINIMUM CAP DEPTH (1'-0")
3. EXTEND CONDUIT AS REQUIRED.
4. ATTACH ANCHOR BOLT EXTENSION TO EXISTING ANCHOR BOLT AND WELD IN PLACE.
5. THE TOP 6" OF THE CONCRETE CAP SHALL BE FORMED.
6. RESET POLE AFTER CONCRETE HAS CURED.
7. RECONNECT ELECTRICAL POWER & GROUNDING.
8. ALL CIRCUITS WHICH ARE DISCONNECTED FOR CONSTRUCTION ACTIVITIES MUST BE TEMPORARILY RECONNECTED AT END OF EACH WORK DAY OR AS DIRECTED BY THE ENGINEER.

MIS-205	CITY OF COLUMBUS, OHIO DEPT. OF PUBLIC UTILITIES - DIVISION OF POWER		
	EXTEND EXISTING LIGHT POLE FOUNDATION		
	DRAWN BY: BEN	DATE: 1/1/2018	
	APPROVED: <i>[Signature]</i>		
SCALE: NONE	SHEET: 1 OF 1	081	