

I. MATERIALS



- A. ANCHOR BOLT EXTENSION SHALL BE AS SHOWN.
- B. CONCRETE SHALL BE ITEM 499 CLASS C CONCRETE.

II. INSTALLATION

INSTALLATION SHALL BE AS SHOWN.

III. BASIS OF PAYMENT

ITEM	UNIT	DESCRIPTION
MIS-204	EACH	FOUNDATION REPAIR

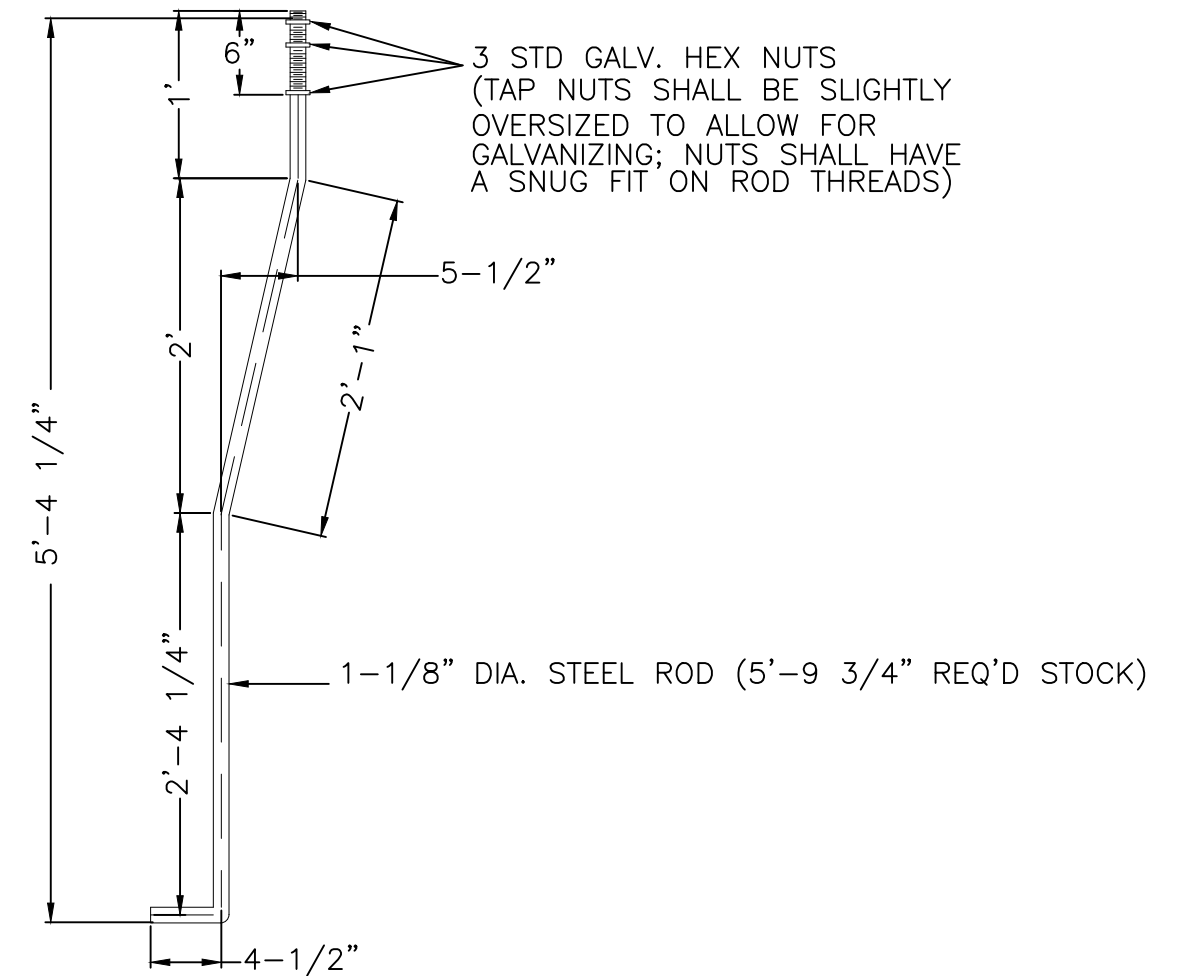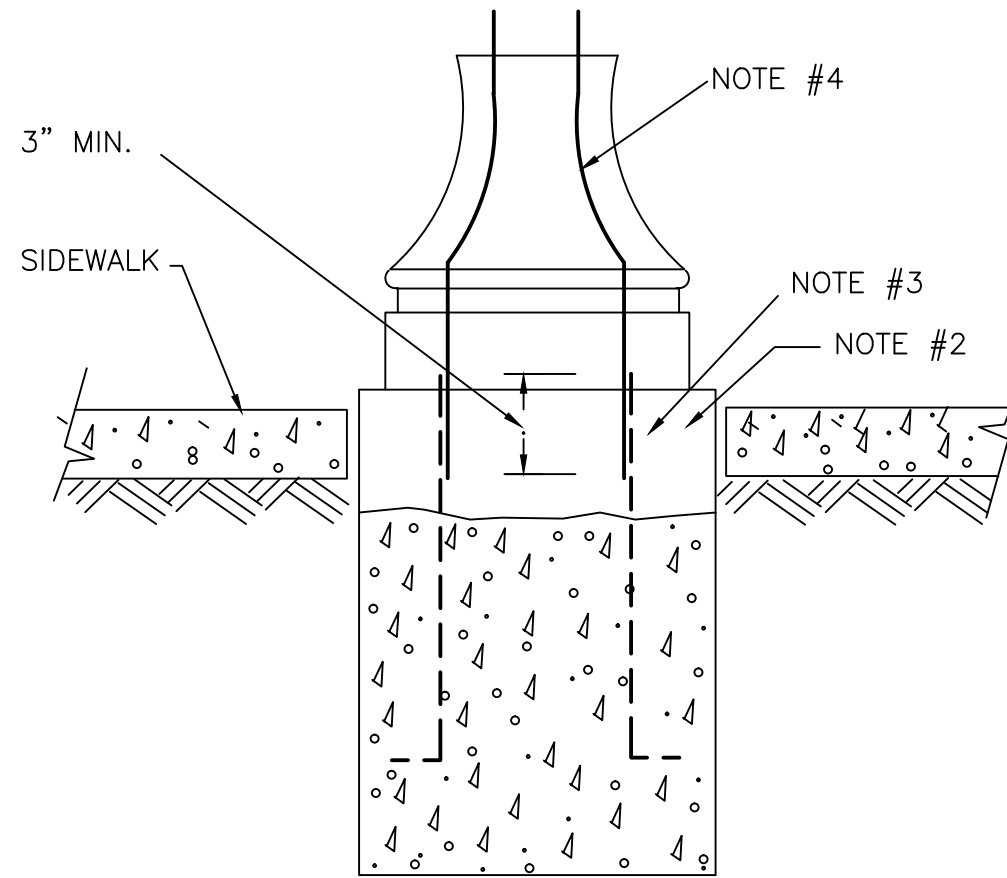

NEW ANCHOR BOLT

REPAIR NOTES:

1. REMOVE POLE
2. REMOVE CONCRETE TO A POINT THAT THE ANCHOR BOLTS ARE EXPOSED BELOW AREA OF CORROSION. (EXISTING CONDUIT TO REMAIN)
3. SAW CUT ANCHOR BOLT. (TORCHING ANCHOR BOLT IS PROHIBITED)
4. WELD ON NEW ANCHOR BOLT EXTENSION WITH $\frac{5}{16}$ " FILLET WELD ON BOTH SIDES, FULL LENGTH OF OVERLAP.
5. RECAST CONCRETE AND RESET POLE.
6. RECONNECT ELECTRICAL POWER & GROUNDING.
7. ALL CIRCUITS WHICH ARE DISCONNECTED FOR CONSTRUCTION ACTIVITIES MUST BE TEMPORARILY RECONNECTED AT END OF EACH WORK DAY.

MIS-204	DEPARTMENT OF PUBLIC UTILITIES - DIVISION OF POWER CITY OF COLUMBUS, OHIO		
	FOUNDATION REPAIR		
	DRAWN BY: DJ	DATE: 1/1/18	
	APPROVED: <i>Amy R. Wilfong</i>		
SCALE: NONE	SHEET: 1 OF 1	072	