


TYPE "B": Long Side Bend to Tee.  
 TYPE "B" MODIFIED: Short Side Bend to Tee.

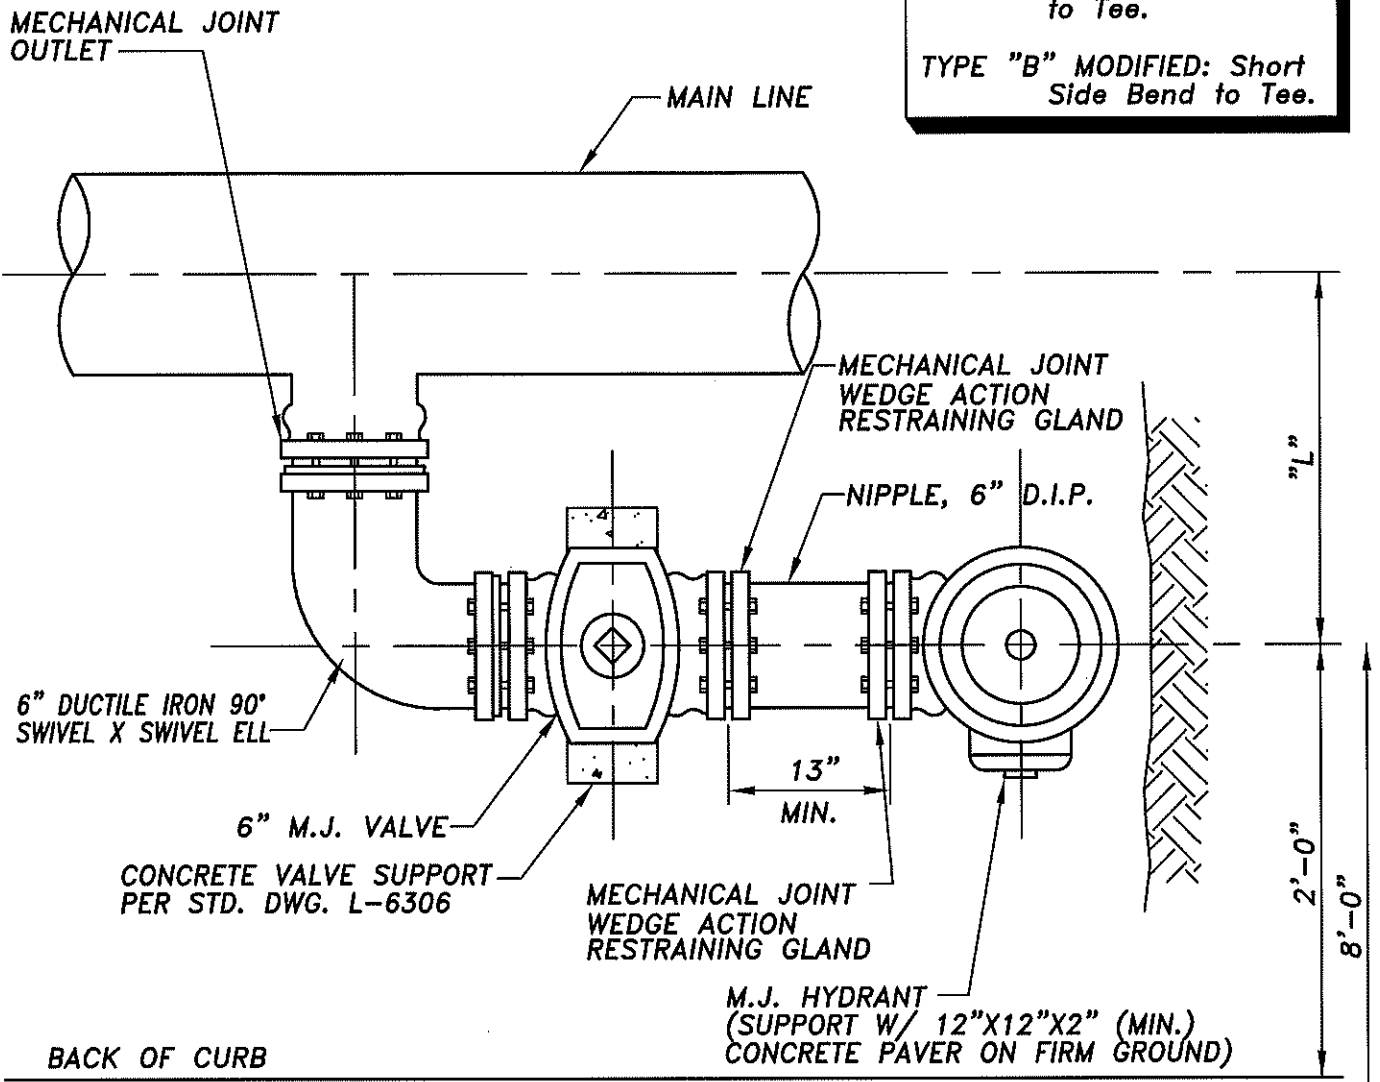

EDGE OF PAVEMENT OR EDGE OF PAVED BERM

MAIN LINE	DIMENSION "L"	
	TYPE "B"	TYPE "B" MOD.
20"	33"	28"
24"	36"	31"
30"	39"	34"
36"	43"	38"
42"	46"	41"
48"	49"	44"

**NOTES:**


1. FIRE HYDRANT SHALL HAVE A MAXIMUM BURY OF 7'-0". MODIFICATION OF THE HYDRANT LEAD TO MEET THIS REQUIREMENT SHALL BE IN THAT SECTION FROM THE VALVE TO THE HYDRANT AS PER STANDARD DETAIL L-7601.
2. FIRE HYDRANTS SHALL BE SET A MINIMUM OF 6' FROM ALL DRIVEWAY OPENINGS.
3. TEE USED TO CONNECT HYDRANT LEAD TO WATER MAIN IS INCLUDED IN COST OF ITEM 809, FIRE HYDRANT.

CITY OF COLUMBUS  
 DEPARTMENT OF PUBLIC UTILITIES  
 DIVISION OF WATER

APPROVED:  
*R.C. Westerfield*  
 ADMINISTRATOR

1-26-18  
 DATE

STANDARD DETAIL  
**TYPICAL HYDRANT SETTING**  
 TYPE "B" AND "B" MODIFIED  
 FOR CONCRETE AND STEEL PIPE



L-6409 B.Dwg Revision Date: 1/19/18