


INSIDE BORDER

# CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION

## PROJECT DESCRIPTION

**DESIGNER NOTE:**  
THE PROJECT DESCRIPTION SHALL ADEQUATELY DESCRIBE THE TYPE OF WORK BEING COMPLETED (I.E. FULL DEPTH ROADWAY RECONSTRUCTION), THE STREETS IMPACTED BY THIS WORK OR A THOROUGH DESCRIPTION OF THE AREA, THE APPROXIMATE LIMITS OF THE WORK BEING PERFORMED, AND A SUMMARY OF ITEMS IMPROVED (I.E. STORMWATER DRAINAGE SYSTEM, STREET LIGHTING, ADD LANDSCAPE FEATURES, WATERLINE IMPROVEMENTS, SIGNAL/INTERCONNECT IMPROVEMENTS, ADDITION OF SHARED USE PATH, BIKE LANES, PUBLIC ACCESS ROUTE IMPROVEMENTS, ETC.).

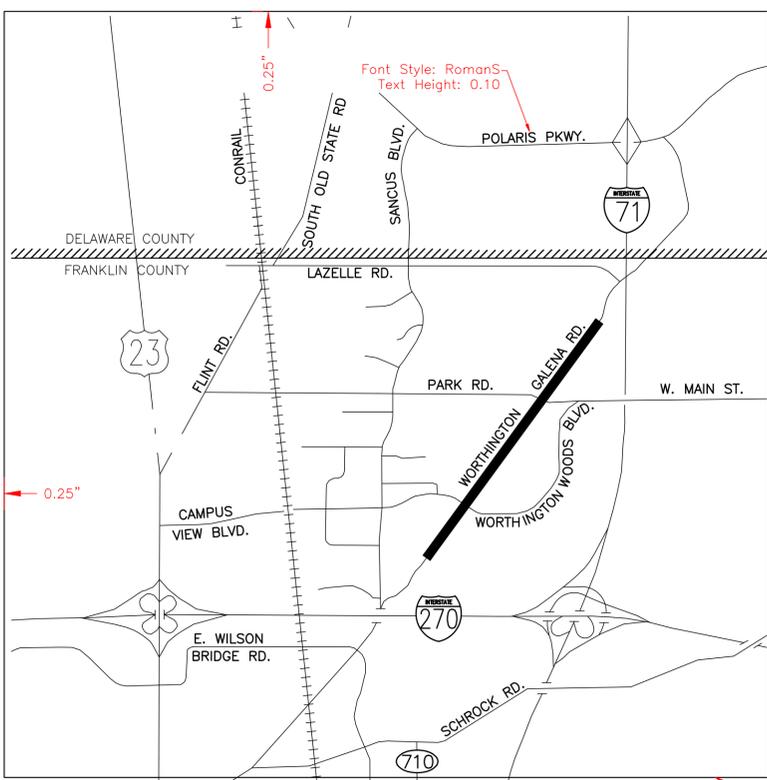

LOCATION MAP

P.O.B. = LATITUDE: 40° 06' 54" N LONGITUDE: 82° 59' 34" W

Scale in Miles



Portion/s to be Improved:

## DESIGN DESIGNATION DATA

Current ADT (yyyy).....  
Design Year ADT (yyyy).....  
Design Hourly Volume (yyyy).....  
Directional Distribution.....  
Trucks (24 hour b&c).....  
Design Speed.....  
Legal Speed.....  
Design Functional Classification.....

## DESIGN EXCEPTION

## ASSOCIATED PLANS

Font Style: RomanT  
Text Height: 0.45  
Font Style: RomanS  
Text Height: 0.35  
Font Style: RomanS  
Text Height: 0.24



Font Style: RomanT  
Text Height: 0.45  
Font Style: RomanS  
Text Height: 0.24

Font Style: RomanS  
Text Height: 0.12  
**DESIGNER NOTE:**  
THE PROJECT LIMITS ARE SHOWN FOR GENERAL REFERENCE. THE STATIONING ON THE LOCATION MAP IS NOT REQUIRED. THE STATIONING FOR THE PROJECT LIMITS SHALL BE SHOWN ON THE SCHEMATIC PLAN AND THE PLAN AND PROFILE SHEETS.

PROJECT DESIGNATION (WHERE APPLICABLE)

# IMPROVEMENTS OF NAME OF STREET

FROM XX' EAST OF XXXX ST.  
TO XX' WEST OF XXXX ST.

## INDEX OF SHEETS

Title Sheet	---	#
Schematic Plan	---	#
Typical Sections	---	#
General Notes	---	#
Legend	---	#
Maintenance of Traffic (Notes and Plan Details)	---	#
Pavement Calculations	---	#
General Summary	---	#
* Post-Construction Storm Water Pollution Control Facilities	---	#
Storm Water Pollution Prevention Plan	---	#
Plan and Profile (including Sub-Summaries)	---	#
Cross Sections	---	#
Intersection and Curb Ramp Details	---	#
Drive Details	---	#
Pavement Details	---	#
Storm Sewer Profiles & Coordinate Data	---	#
Waterline Profiles & Coordinate Data	---	#
Traffic Control	---	#
Traffic Signal	---	#
Traffic Signal Interconnect	---	#
Lighting	---	#
Landscaping	---	#
Structures	---	#
Right-of-Way	---	#

\* **DESIGNER NOTE:**  
ALL CIP "E" PLANS MUST SHOW THIS LINE IN INDEX TABLE AND INDICATE SHEET NUMBER WHERE THIS IS LOCATED IN THE PLANS

**DESIGNER NOTE:**  
FOR FINAL SUBMITTAL, SHEET NUMBERS NEED TO BE HYPERLINKED TO THEIR RESPECTIVE SHEET IN THE PDF.

**DESIGNER NOTE (INDEX OF SHEETS):**  
SHOW A COMPLETE LISTING OF ALL ANTICIPATED PLAN SECTIONS WITH EACH SUBMITTAL. IF THAT PLAN SECTION IS NOT INCLUDED WITH THE SUBMITTAL THEN LEAVE THE SHEET NUMBER BLANK.

**DESIGNER NOTE:**  
DESIGNER NOTES ARE PROVIDED THROUGHOUT THE PLAN TO PROVIDE ADDITIONAL GUIDANCE.

NAME AND ADDRESS OF FIRM PREPARING PLAN

ENGINEER'S SEAL

TRAFFIC SIGNAL ENGINEER'S SEAL (IF APPLICABLE)

Registered Engineer

Date

Registered Engineer

Date

X/X/XX = APPROVAL DATE

COLUMBUS STANDARD CONSTRUCTION DRAWINGS							
AA-S103	X/X/XX	AA-S127	X/X/XX	1441	X/X/XX	2203	X/X/XX
AA-S106	X/X/XX			2010	X/X/XX	L-8502	X/X/XX
AA-S107	X/X/XX			2160	X/X/XX	L-7102	X/X/XX
AA-S119	X/X/XX			2166	X/X/XX		
AA-S125	X/X/XX			2201	X/X/XX		
AA-S126	X/X/XX			2202	X/X/XX		

COLUMBUS SUPPLEMENTAL SPECIFICATIONS			
SS-1551		X/X/XX	
SS-1630		X/X/XX	

ODOT STANDARD CONSTRUCTION DRAWINGS			
MT-97.10	X/X/XX	TC-41.20	X/X/XX
MT-97.11	X/X/XX	TC-42.20	X/X/XX
BP-3.1	X/X/XX		

## EARTH DISTURBED AREA

Font Style: RomanS  
Text Height: 0.10  
Total EDA =  
Pre-Impervious =  
Post-Impervious =

## 2018 SPECIFICATIONS

The City of Columbus Construction and Materials Specifications (CMSC), 2018 Edition including all revisions and supplements in effect at the time of signature by the Director of Public Service, shall govern all construction items that are a part of this plan unless noted otherwise

Font Style: RomanS  
Text Height: 0.10

"City of Columbus" signatures on this plan signify only concurrence with the purpose and general location of the project. All technical details remain the responsibility of the Engineer preparing the plans.

## CITY OF COLUMBUS APPROVALS

Design Section Engineer, Division of Design and Construction	Date
Administrator, Division of Power	Date
Administrator, Division of Sewerage and Drainage	Date
Administrator, Division of Water	Date
Director, Department of Public Utilities	Date
Fire Prevention Bureau, Division of Fire	Date
Engineering Supervisor, Department of Technology	Date
Director, Department of Recreation and Parks	Date
City Engineer-Administrator, Division of Design and Construction	Date
Director, Department of Public Service	Date

**DESIGNER NOTE:**  
SHEET TITLE

Font Style: Times New Roman  
Text Height: 0.20

**DESIGNER NOTE:**  
PROJECT NAME

Font Style: Times New Roman  
Text Height: Varies By Project (Max Height 0.15)  
Font Style: Times New Roman  
Text Height: 0.11

REV NO	Revision Description	Sheet(s)	Initial	Date

**DESIGNER NOTE:**  
INCLUDE THIS STAMP ON EVERY STAGE SUBMITTAL DURING PLAN REVIEW PHASE

STAGE \_\_ REVIEW, DATE \_\_

Plan Number to be placed on every plan sheet.  
Assigned by City of Columbus Division of Design and Construction  
Text height = 0.18"  
Style = Arial (Bold)

EITHER FOR PAGE NUMBERING STYLE



CITY 6+6 NUMBER (ADD ODOT PID WHEN APPLICABLE)

TITLE SHEET

IMPROVEMENTS OF... STREET A FROM STREET B TO STREET C

1  
74  
1  
74  
XXXXE  
1  
74

INSIDE BORDER