


JOINTS:  $\frac{1}{4}$ " CONTRACTION JOINTS SHALL BE CONSTRUCTED OR SAWED AT 10' INTERVALS TO A 2" MINIMUM DEPTH AND ALIGNED WITH TRANSVERSE CONSTRUCTION JOINTS IN BASE.

SLOPE OF TOP OF MEDIAN TO BE IN SAME DIRECTION AS PAVEMENT SLOPE ON EITHER SIDE OF MEDIAN.

MEDIAN NOSE SHALL BE TAPERED FROM 6" TO 2" IN 10' RAMPED AREA

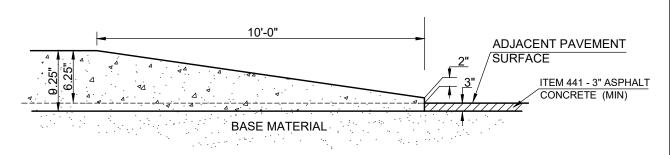

## **SECTION A-A**

## MEDIAN BULLNOSE

## **MEDIAN** (TYPE 1)

CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

2331

07/01/2022

SHT 1 OF 2

**CITY ENGINEER** 

