


**TAPERED AREAS**

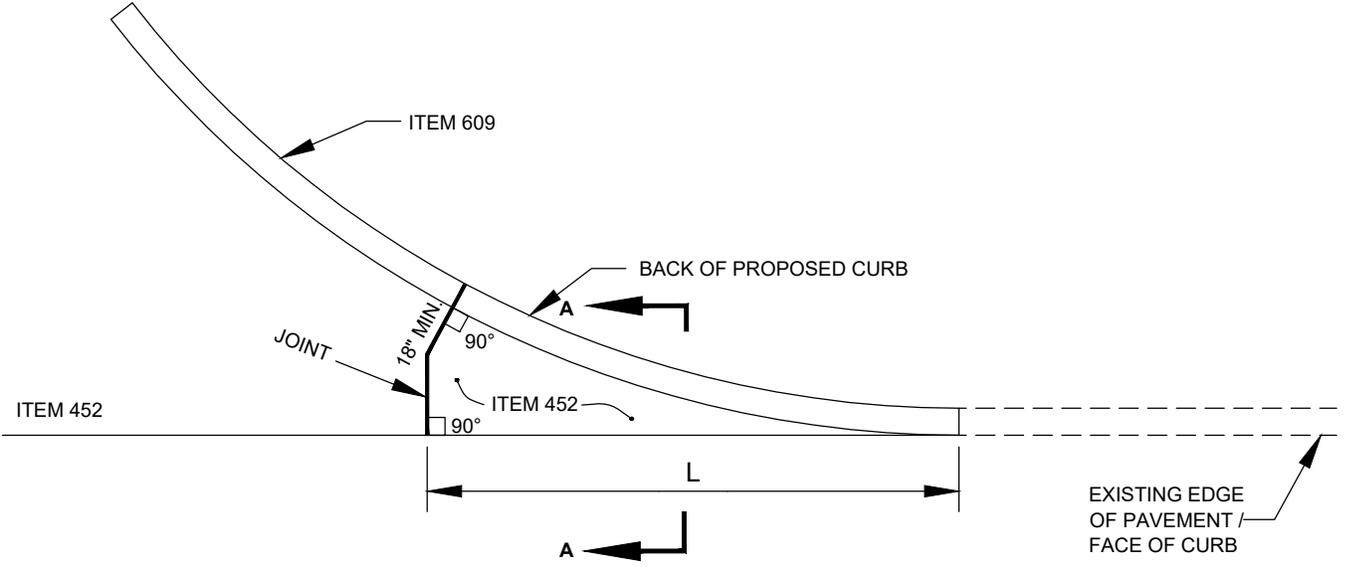

**RADIUS AREAS**

**JOINT LOCATIONS**

TRANSITION SECTION TO BE USED WHEN WIDTH OF CONCRETE BASE MATERIAL IS LESS THAN 36".

IF LENGTH L IS GREATER THAN 9 FEET, SAW IN EQUAL SEGMENTS 5 FEET TO 9 FEET LONG.


**TRANSITION SECTION FOR CONCRETE PAVEMENT**

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION


**STD DWG  
2171**

*[Signature]*  
CITY ENGINEER

04/30/18  
SHT 1 OF 3

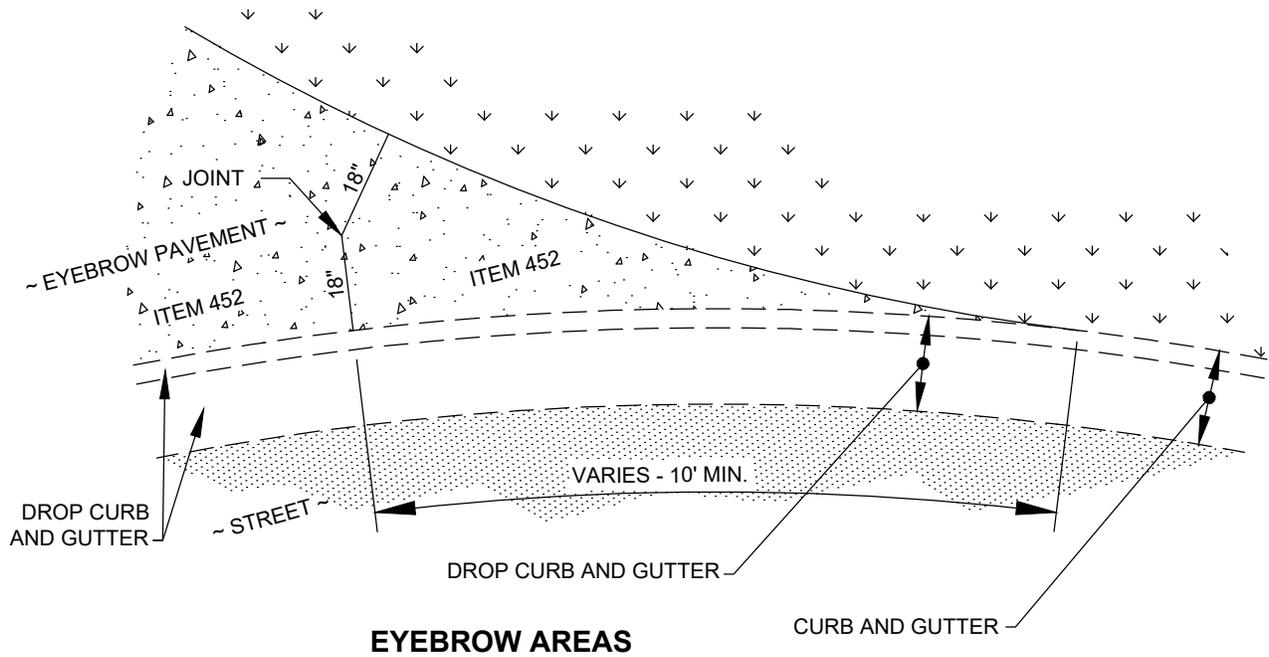

**EYEBROW AREAS**

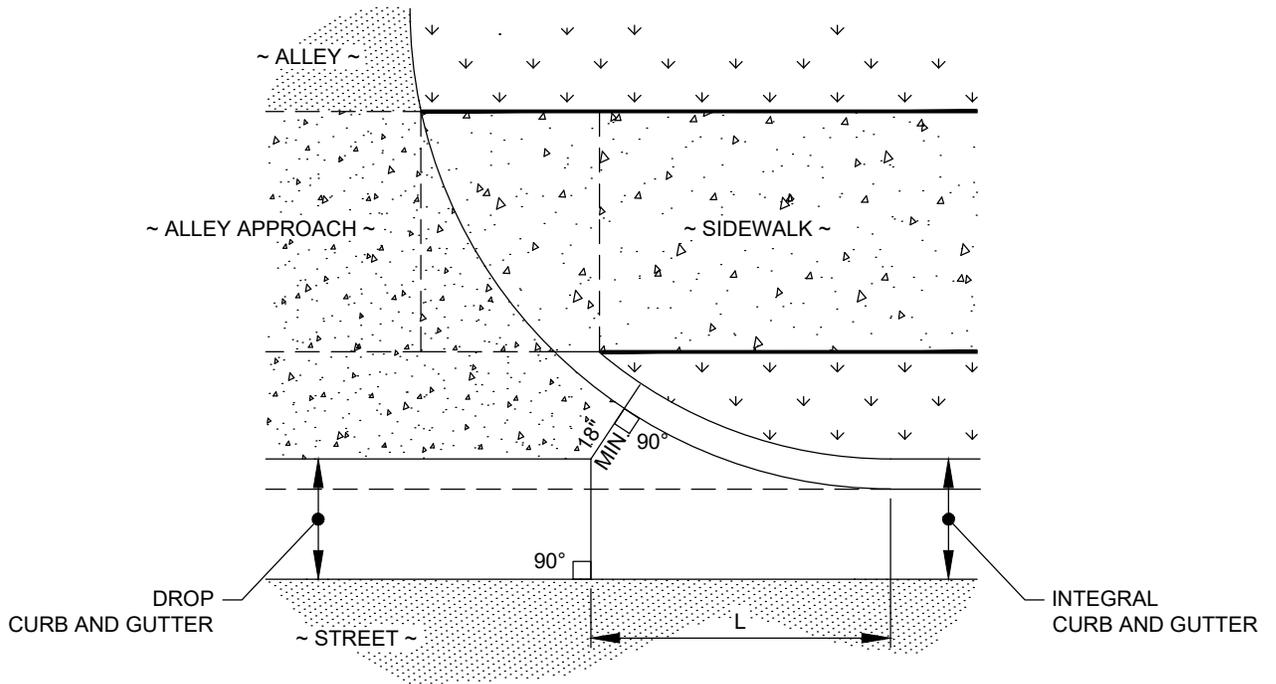

**ALLEY APPROACH AREAS**

**JOINT LOCATIONS**

**TRANSITION SECTION  
FOR CONCRETE PAVEMENT**

TRANSITION SECTION TO BE USED WHEN WIDTH OF CONCRETE BASE MATERIAL IS LESS THAN 36".


IF LENGTH L IS GREATER THAN 9 FEET, SAW IN EQUAL SEGMENTS 5 FEET TO 9 FEET LONG.

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG  
**2171**

04/30/18

SHT 2 OF 3

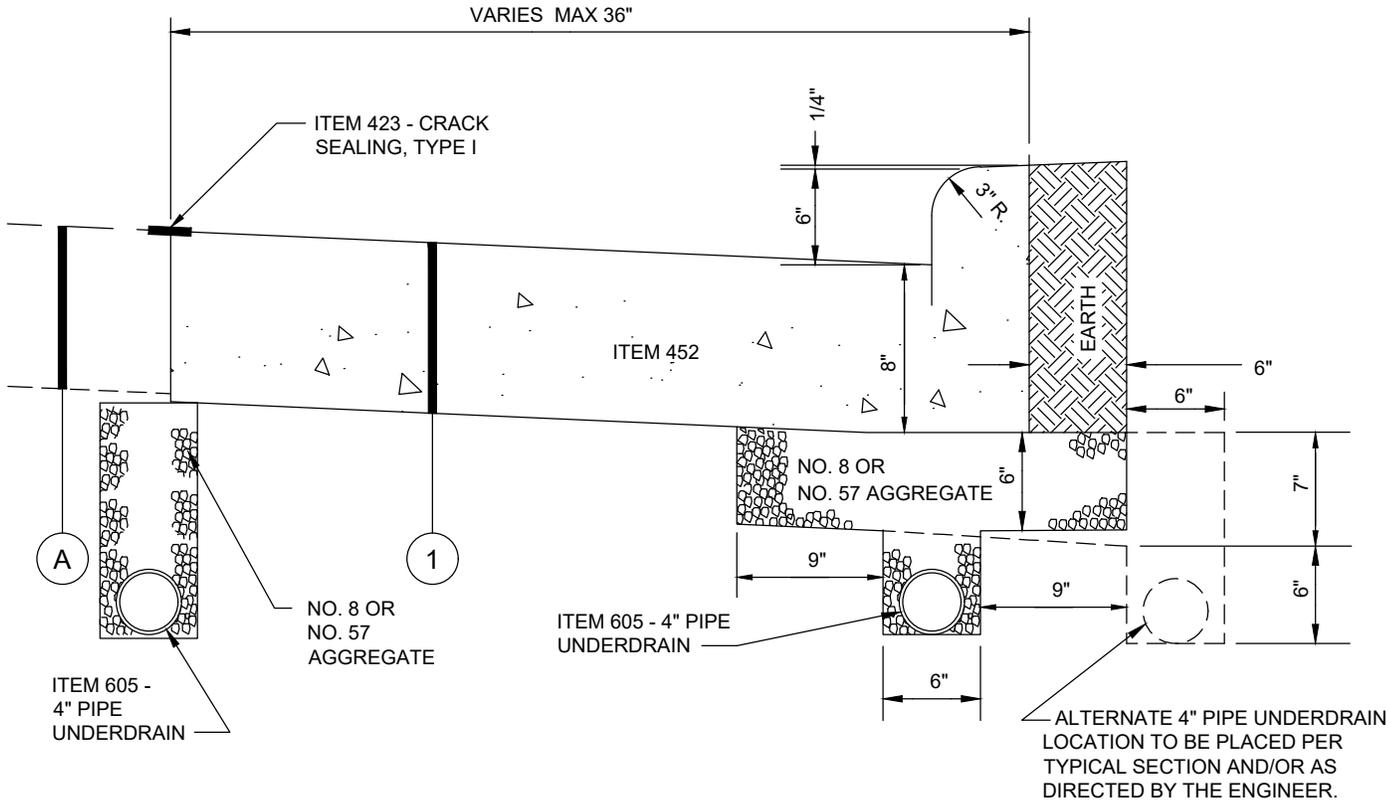

- (A) EXISTING PAVEMENT (VARIES)
- (1) ITEM 452 - 8" NON-REINFORCED CONCRETE PAVEMENT WITH INTEGRAL CURB

**SECTION A - A**

<b>TRANSITION SECTION FOR CONCRETE PAVEMENT</b>	
CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION	<b>STD DWG 2171</b>
	04/30/18
	SHT 3 OF 3