

* SEE SHEET 3 OF 3 FOR SECTION A-A.

** MAINTAIN CONCRETE GUTTER AND 4" PIPE UNDERDRAIN.

*** IF SIDEWALK IS BUILT AT GRADE AND CURB IS DROPPED THEN ONLY DETECTABLE WARNINGS ARE REQUIRED.

**** SEE TABLE SCD 2151.

RAISED EDGE OR CURB ON ALLEY SECTION WILL BE INCLUDED IN THE AREA OF CONCRETE PAVING AND CURB AND GUTTER LENGTH THROUGH ALLEY

PAR = PEDESTRIAN ACCESS ROUTE.

d = DISTANCE FROM STRINGLINE TO CENTERLINE INVERT.

COMBINATION CURB & GUTTER

ALLEY APPROACH


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
2150

CITY ENGINEER

4/30/2018

SHT 1 OF 3

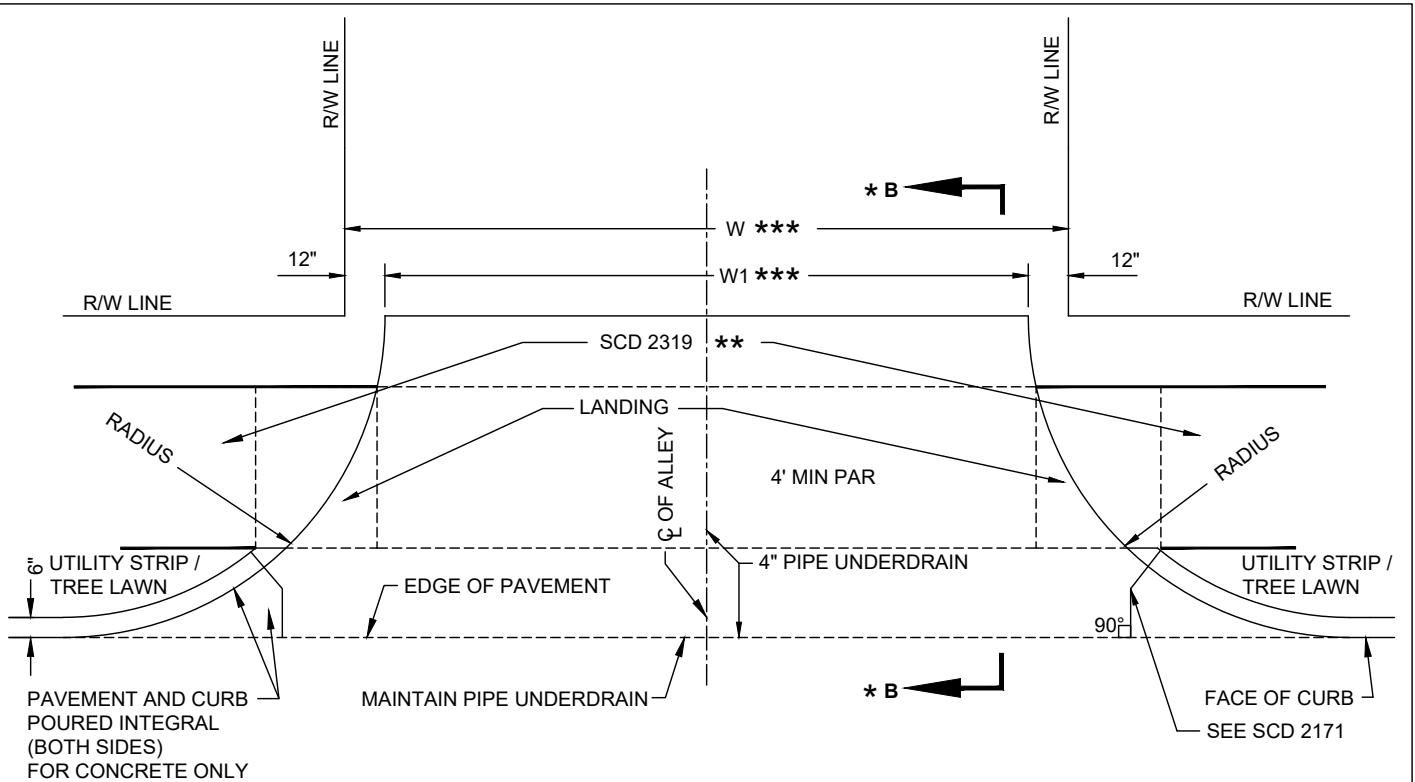

* SEE SHEET 3 OF 3 FOR SECTION B-B.

** IF SIDEWALK IS BUILT AT GRADE AND CURB IS DROPPED THEN ONLY DETECTABLE WARNINGS ARE REQUIRED.

*** SEE TABLE, SCD 2151.

RAISED EDGE OR CURB ON ALLEY SECTION WILL BE INCLUDED IN THE AREA OF CONCRETE PAVING AND CURB AND GUTTER LENGTH THROUGH ALLEY.

PAR = PEDESTRIAN ACCESS ROUTE.

d = DISTANCE FROM STRINGLINE TO CENTERLINE INVERT.

CURB, STRAIGHT 18"



ALLEY APPROACH

CITY OF COLUMBUS, OHIO
 DEPARTMENT OF PUBLIC SERVICE
 DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
2150

4/30/2018

SHT 2 OF 3

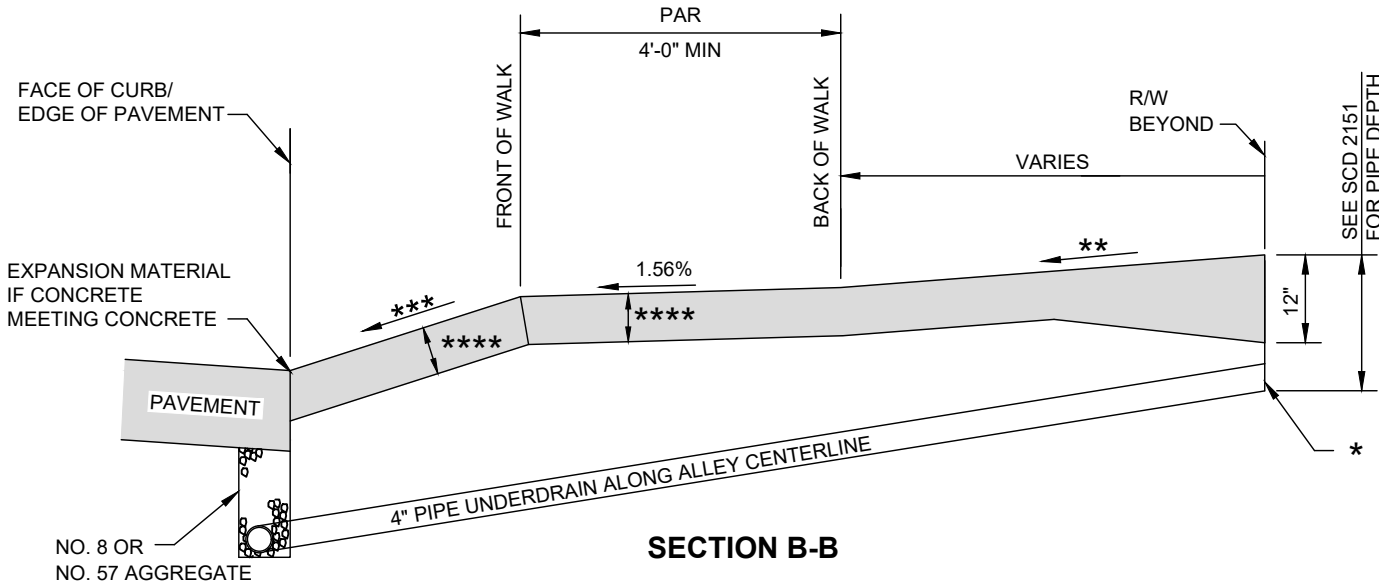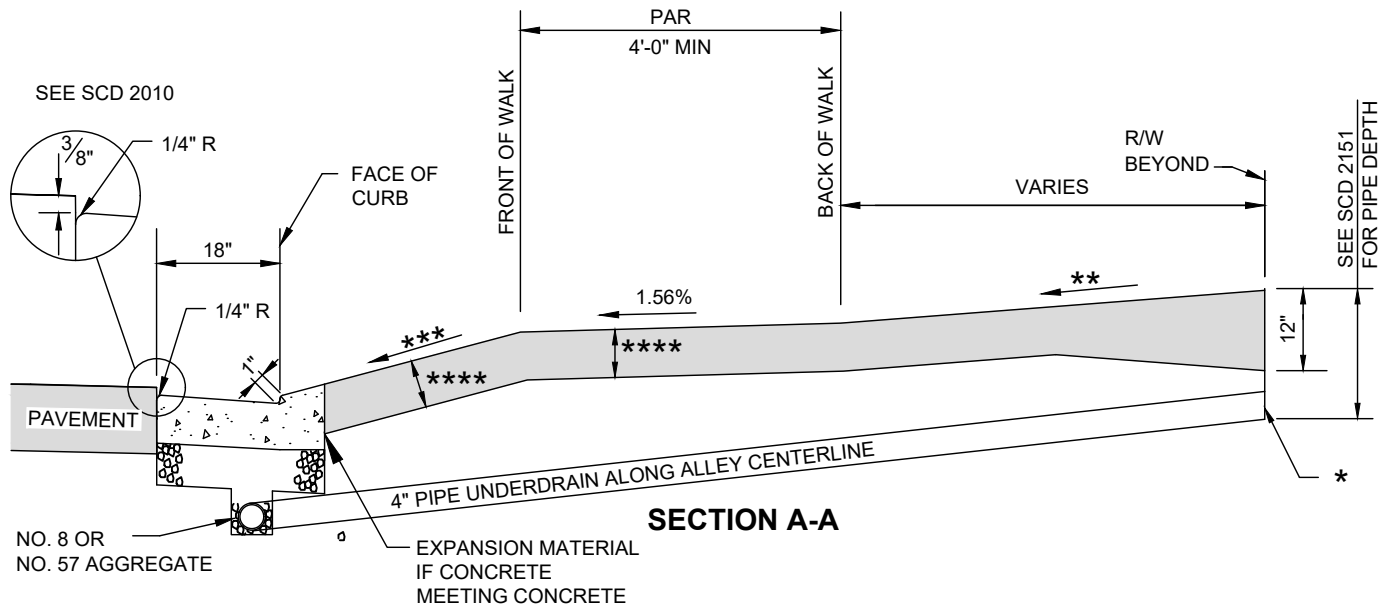

- * CAP END IF NOT CONNECTED TO PIPE UNDERDRAIN AT TIME OF CONSTRUCTION.
- ** SLOPE VARIES.
- *** 8% MAX SLOPE
- **** FOR CONCRETE, 7".
FOR FLEXIBLE PAVEMENT, SEE RESIDENTIAL PAVEMENT POLICY.

TYPICAL PROFILE

PAR = PEDESTRIAN ACCESS ROUTE.

<h1>ALLEY APPROACH</h1>	
CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION	STD DWG 2150
	4/30/2018
	SHT 3 OF 3