
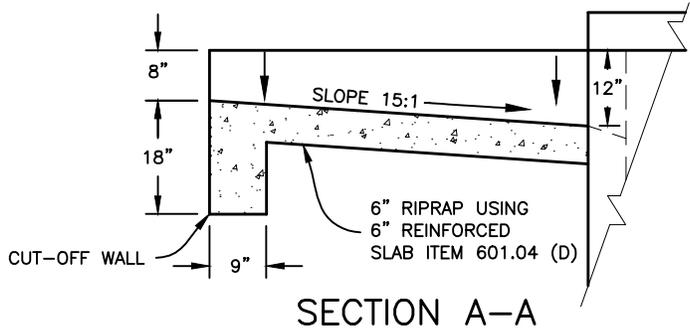
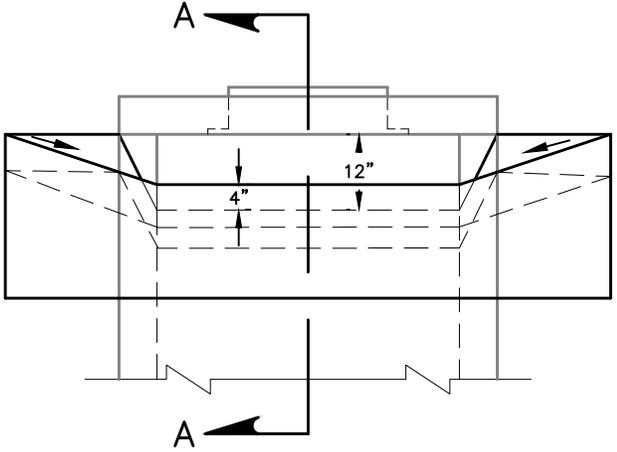
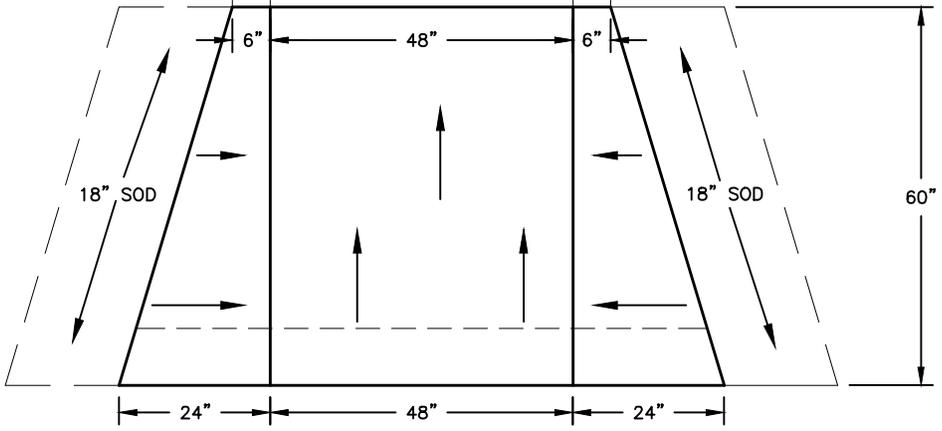
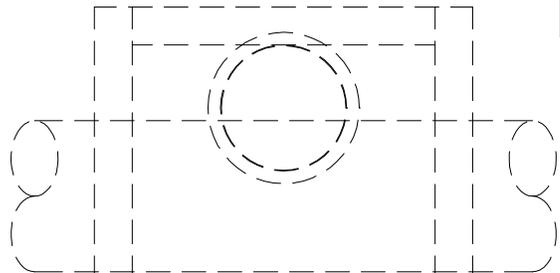



NOTE:

1. VALUE OF "H" TO RANGE FROM 12" UPWARDS AS SITUATION REQUIRES. THE GRATE BARS ARE TO BE SEATED SECURELY IN WALL BY EMBEDMENT TO EXTENT AS SHOWN OR BY FABRICATION AND ATTACHMENT IN AN APPROVED MANNER. GRATE BAR MATERIAL SHALL BE WROUGHT IRON GALVANIZED.
2. PRECAST UNITS SHALL BE CLASS "C" CONCRETE AND HAVE A MINIMUM THICKNESS OF 6". PRECAST UNITS SHALL BE IN ACCORDANCE WITH ASTM C913 AND SHALL BE REINFORCED SUFFICIENTLY TO PERMIT SHIPPING AND HANDLING WITHOUT DAMAGE.

CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC UTILITIES DIVISION OF SEWERAGE & DRAINAGE	RECTANGULAR CONCRETE CATCH BASIN 48" INLET	STD. DWG. AA-S136
SSES MANAGER <i>John J. Newson</i>		REVISED 8/8/14
		PAGE 1 / 2

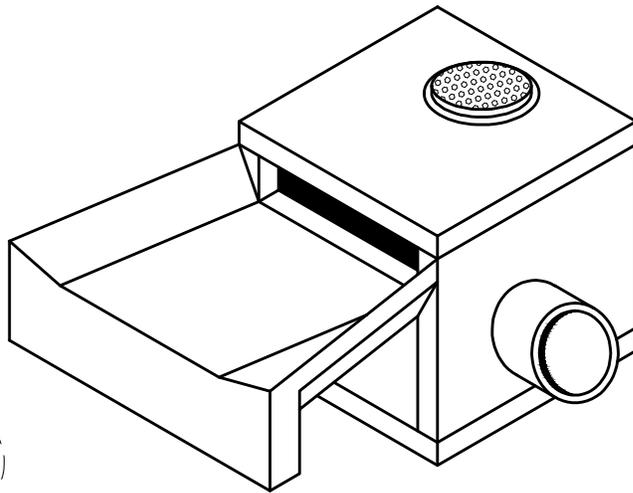

NOTE:
PAVE AREA ADJACENT TO INTAKE OPENING AND SHAPE AND SLOPE AS DIRECTED.
COST TO BE INCLUDED IN PRICE BID FOR CATCH BASIN.

CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC UTILITIES DIVISION OF SEWERAGE & DRAINAGE	CATCH BASIN 48" INLET	STANDARD DRAWING AA-S136	
 SSES MANAGER		REVISED 8/8/14	
		PAGE	2 / 2