
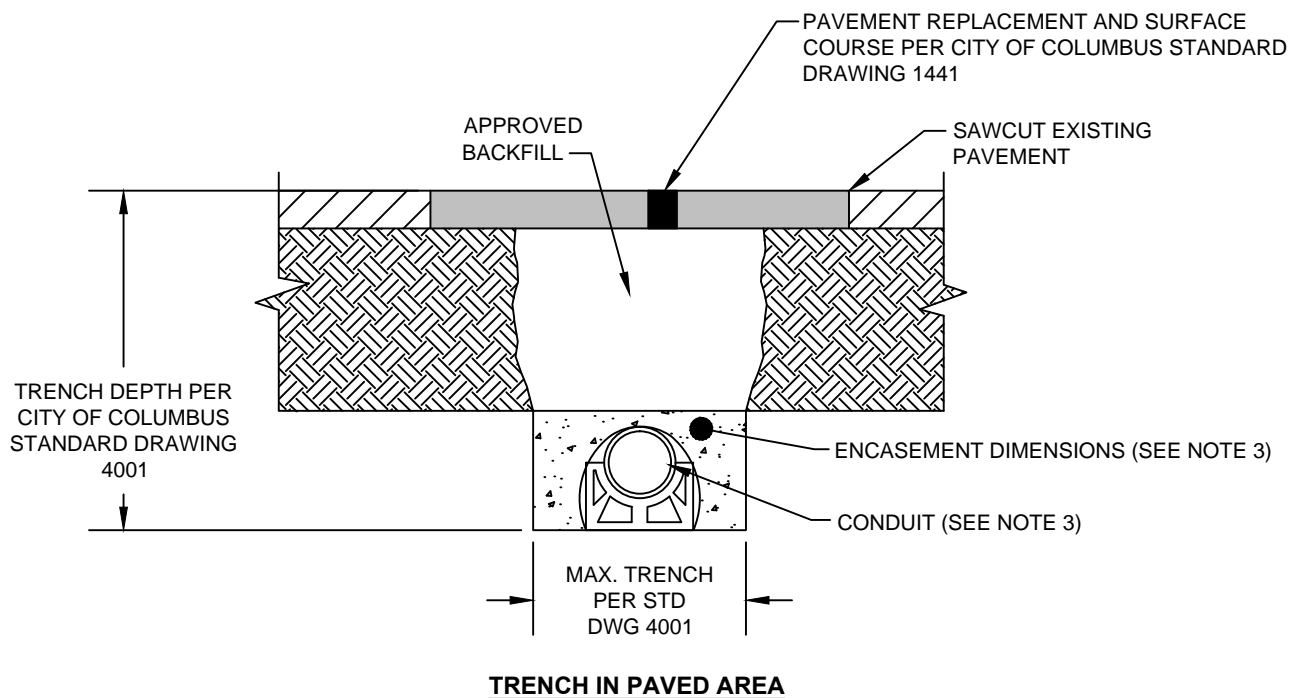


Traffic Signal Standard Drawing Index

City of Columbus, Ohio
Department of Public Service
Division of Design and Construction

Reference Index of Standard Construction Drawings [4000-4331]

STD DWG NO.	STANDARD DRAWING TITLE	REVISION DATE
4000	Roadway Conduit Standards	08/10/2017
4001	Traffic Signal Conduit Bank Standards	08/01/2015
4002	Conduit Guard Rail Protection	05/01/2014
4020	Pull Box Underdrain	05/01/2014
4021	27" Pull Box	07/01/2020
4022	32" Pull Box	07/01/2020
4023	48" Pull Box	07/01/2020
4024	Loop pull box installed over IC duct bank	08/01/2017
4050	Signal Cable Conduit Riser for Pole Mounted Cabinet	08/10/2017
4051	Power Service Conduit Riser for Ground Mounted Cabinet	05/01/2014
4052	Power Service Conduit Riser for Pole Mounted Cabinet	08/10/2017
4100	5' pedestal, Pushbutton Mounting	10/01/2018
4101	10.7' pedestal – Pedestrian Signal Head Mountings	08/10/2017
4102	12.7' pedestal – Vehicular Signal Head Mounting	08/10/2017
4103	17.5' pedestal –Street Name Sign Mounting	10/01/2018
4104	21' pedestal – Vehicular Signal Head Mounting	08/10/2017
4105	Transformer Base	08/10/2017
4106	10.7' Decorative Pedestal	07/01/2020
4110	Detector Unit/Traffic Flow Monitor Bracket Arm	10/01/2018
4111	Traffic Flow Monitor	08/10/2017
4120	Standard City of Columbus Mast Arm	10/01/2018
4121	Decorative City of Columbus Mast Arm	07/01/2020
4122	Mechanical Dampening Device	10/01/2018
4160	Signal Support / Strain Pole Foundation	10/01/2018
4161	Pole Foundation In Sidewalk Area	08/01/2015
4162	Traffic Signal Controller Cabinet Foundation	07/01/2020
4163	Pedestal Foundation	07/01/2021
4164	Power Meter Cabinet and Foundation	10/01/2020
4170	Strain Pole	07/01/2021
4200	Pole Mounting standards	08/01/2015
4202	Overhead Signal Attachments - Span Wire	08/10/2017
4205	Traffic Signal Backplate	05/01/2014
4230	Pushbutton and sign installation details	10/01/2018
4253	Sign Support Assembly, Pole Mounted	05/01/2014
4300	Vehicle Detector Standards	07/01/2020
4301	Bike Detector Markings	08/10/2017
4330	Messenger Wire Details 1	08/10/2017
4331	Messenger Wire Details 2	05/01/2014

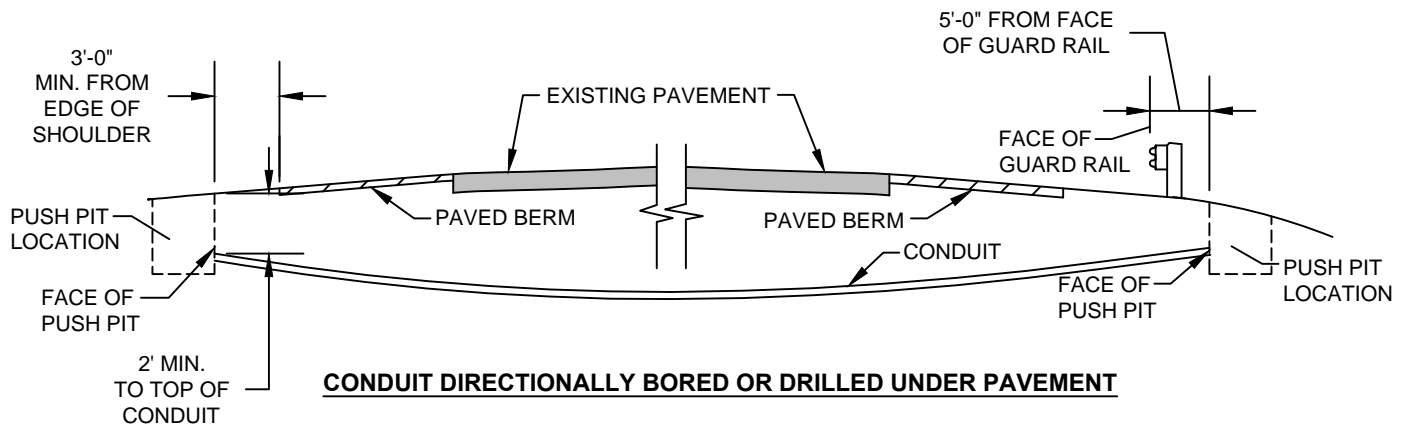

NOTES:

1. CONDUIT THAT IS DRILLED/DIRECTIONALLY BORED SHALL BE (725.052, EPEC-80-HDPE) OR 725.20 SCHEDULE 80. JACKED CONDUIT SHALL BE RIGID METAL CONDUIT (725.04).
2. THE CONTRACTOR WITH THE APPROVAL OF THE ENGINEER OR AT THE DIRECTION OF THE PLANS OR THE ENGINEER SHALL POTHOLE THE PROPOSED JACKING/BORED AREA.
3. FOR TRAFFIC SIGNAL CONDUIT BANK AND CONDUIT SEE CITY OF COLUMBUS STANDARD DRAWING 4001.

ROADWAY CONDUIT STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4000**

8/10/2017

CITY ENGINEER


SHT 1 OF 2

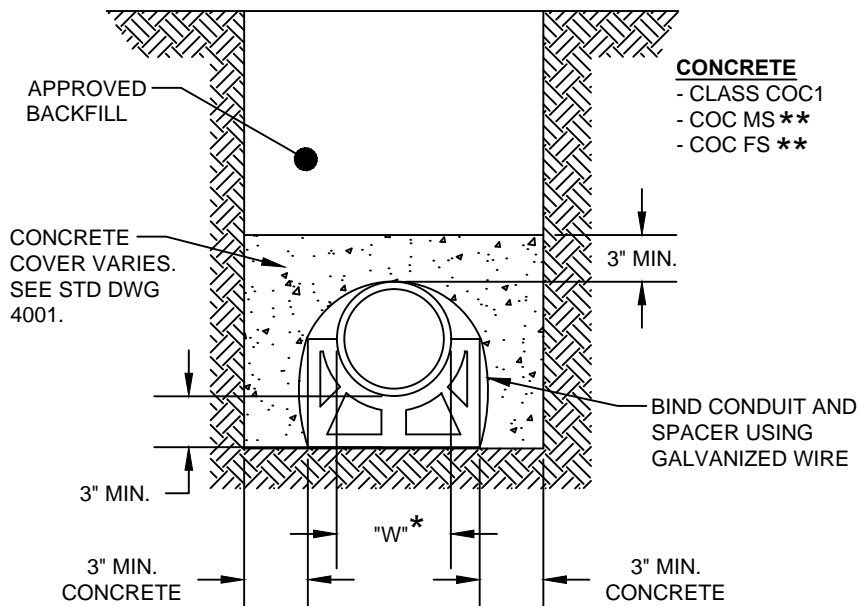

* NOTE:
"W" IS WIDTH OF
CONDUIT.

** USE AS DIRECTED.

**TRENCH SECTION
CONCRETE ENCASED CONDUIT**

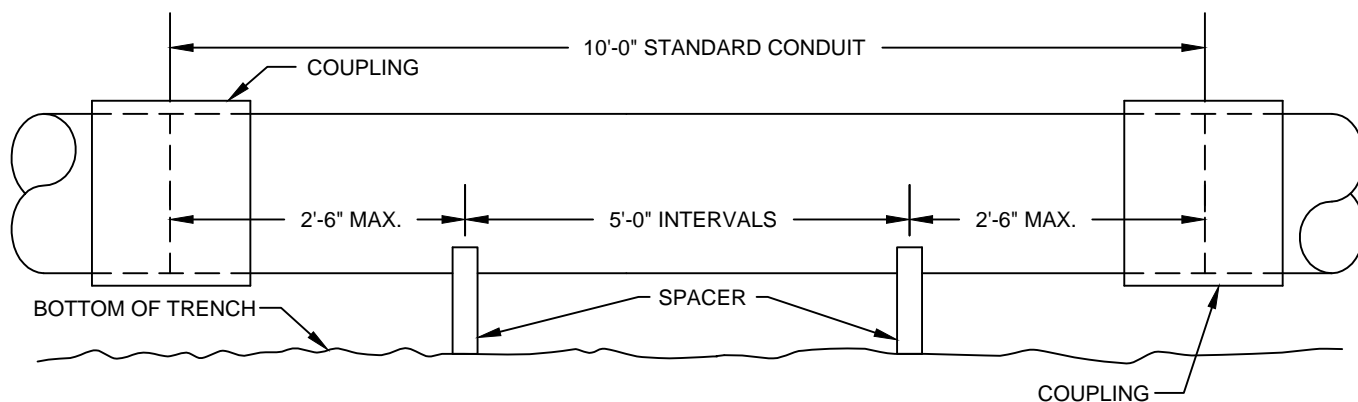

**SIDE ELEVATION
CONCRETE ENCASED CONDUIT**

ROADWAY CONDUIT STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4000


CITY ENGINEER

8/10/2017

SHT 2 OF 2

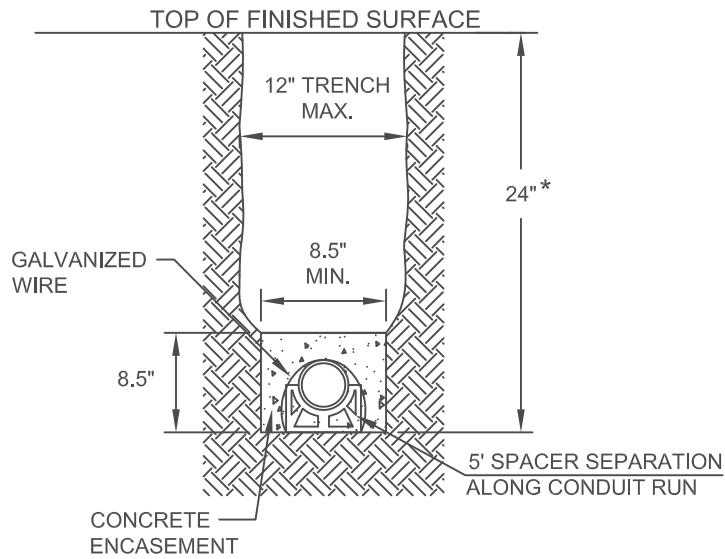

ONE 2" CONDUIT ENCASED

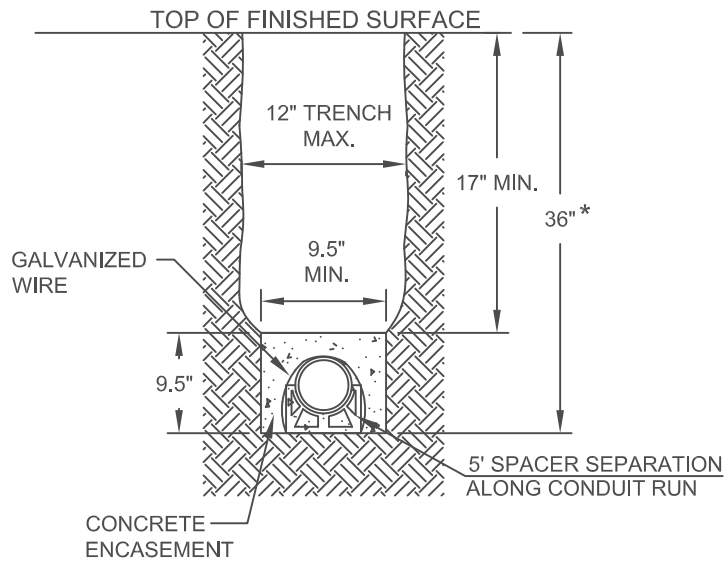

ONE 3" CONDUIT ENCASED

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

NOTE:

SMALLER DIAMETER CONDUITS MAY NEED WRAPPED SEPARATELY.

ENCASED CONDUIT

TRAFFIC SIGNAL CONDUIT BANK STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG
4001

8/01/2015

SHT 1 OF 9

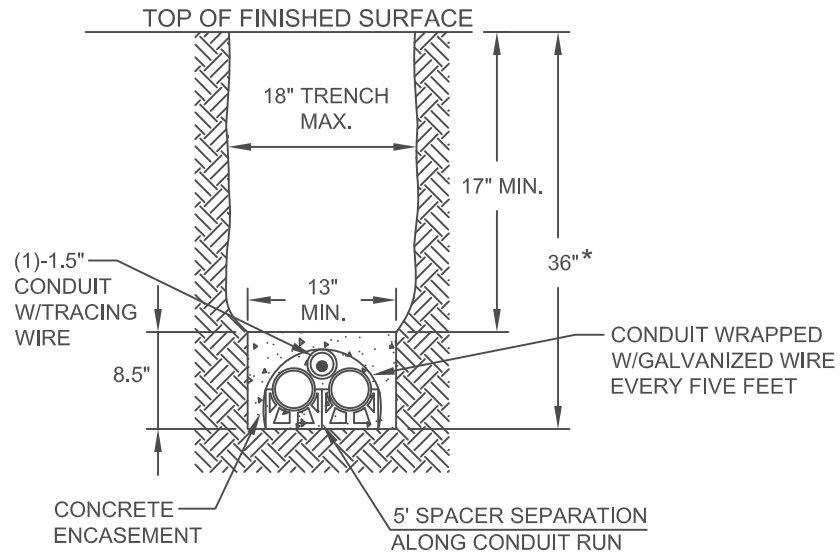

TWO 2" & ONE 1.5" CONDUIT BANK
WITH 3" CONCRETE ENCASEMENT
(4-3/8" CENTER-CENTER CONDUIT SEPARATION)

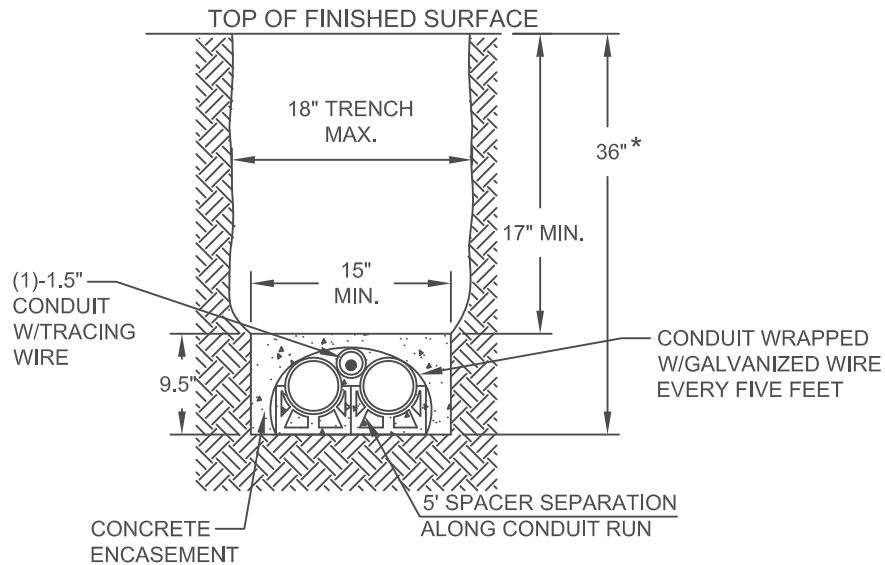

TWO 3" & ONE 1.5" CONDUIT BANK
WITH 3" CONCRETE ENCASEMENT
(5-1/2" CENTER-CENTER CONDUIT SEPARATION)

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

NOTE:

SMALLER DIAMETER CONDUITS MAY NEED WRAPPED SEPARATELY.

CONDUIT BANK

**TRAFFIC SIGNAL
CONDUIT BANK
STANDARDS**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahra

CITY ENGINEER


STD DWG
4001

8/01/2015

SHT 2 OF 9

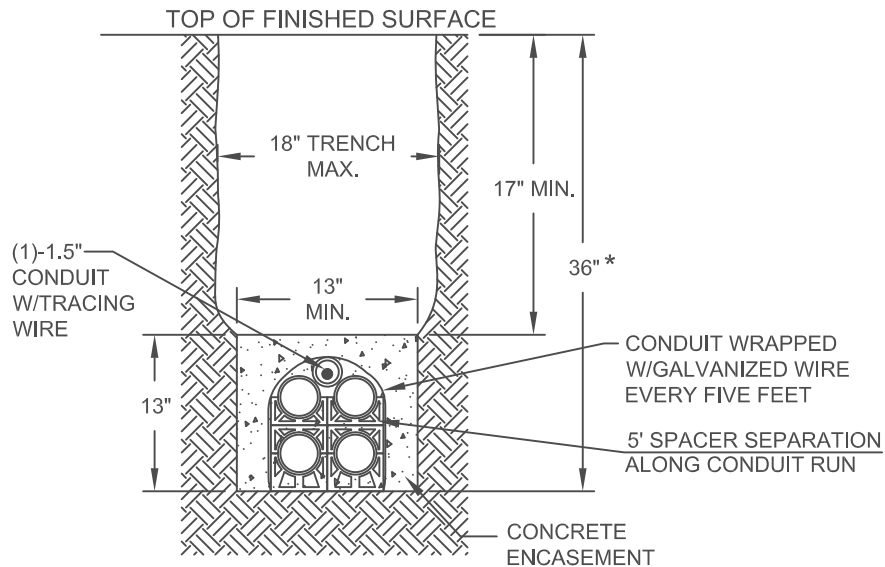

**FOUR 2" & ONE 1.5" CONDUIT BANK
WITH 3" CONCRETE ENCASEMENT
(4-3/8" CENTER-CENTER CONDUIT SEPARATION)**

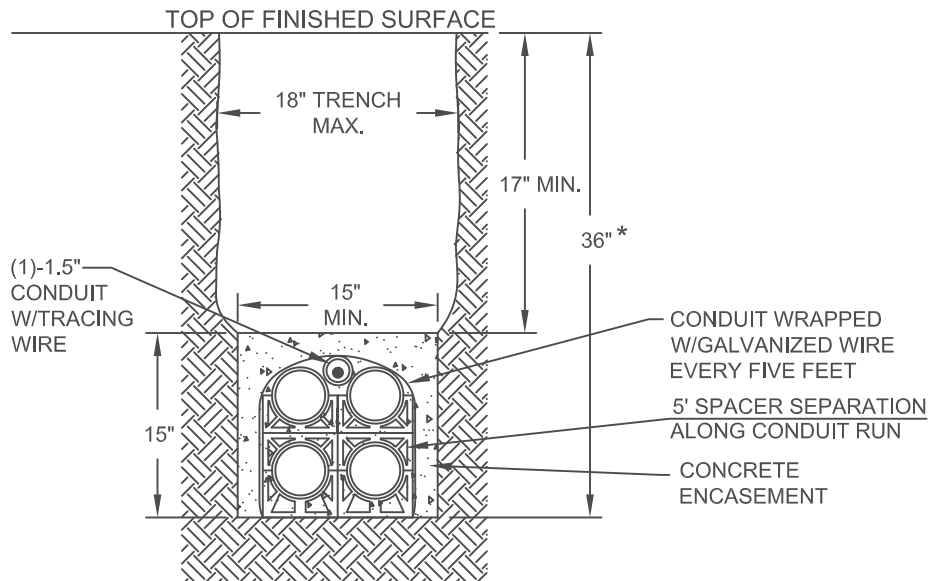

**FOUR 3" & ONE 1.5" CONDUIT BANK
WITH 3" CONCRETE ENCASEMENT
(5-1/2" CENTER-CENTER CONDUIT SEPARATION)**

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

NOTE:

SMALLER DIAMETER CONDUITS MAY NEED WRAPPED SEPARATELY.

CONDUIT BANK

TRAFFIC SIGNAL CONDUIT BANK STANDARDS



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG
4001

8/01/2015


SHT 3 OF 9



SHT 4 OF 9

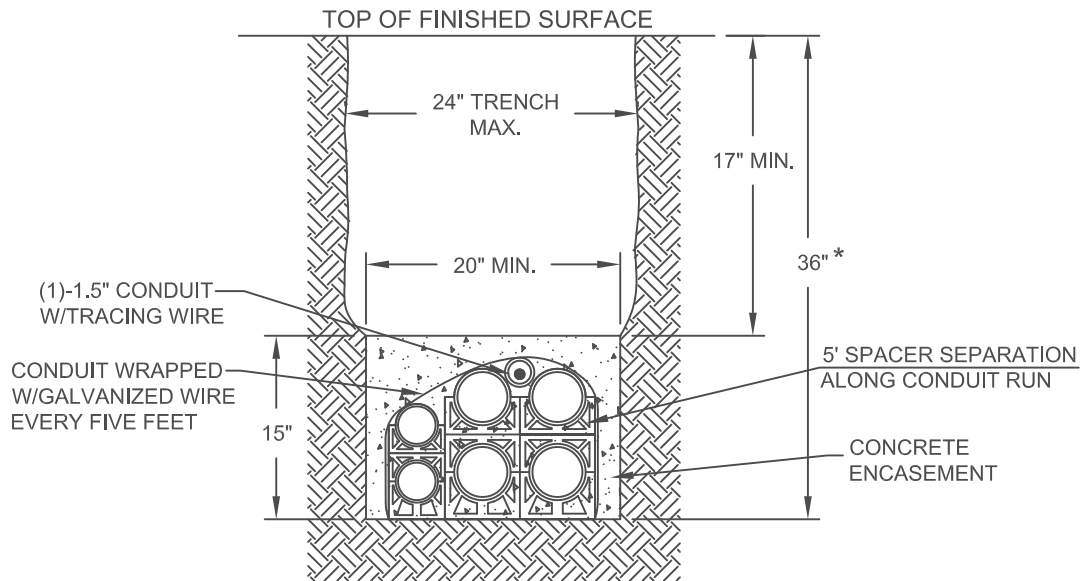

(LOOKING UP STATION)
FOUR 3", TWO 2" & ONE 1.5" CONDUIT BANK
3" CONCRETE ENCASEMENT - TYPE 1
(5-1/2" CENTER-CENTER CONDUIT SEPARATION)

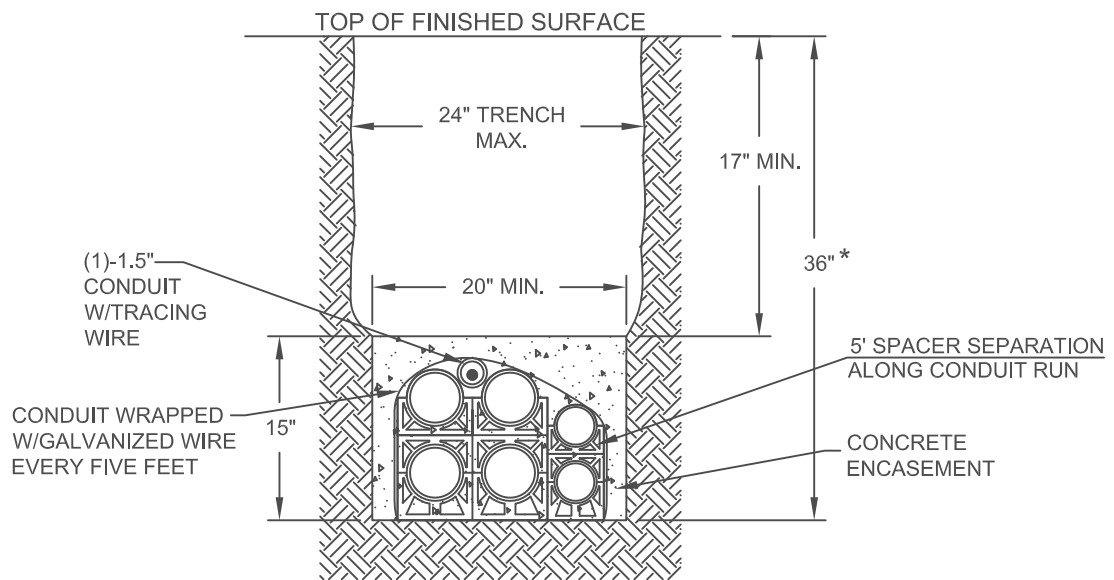

(LOOKING UP STATION)
FOUR 3", TWO 2" & ONE 1.5" CONDUIT BANK
3" CONCRETE ENCASEMENT - TYPE 2
(5-1/2" CENTER-CENTER CONDUIT SEPARATION)

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

NOTE:

SMALLER DIAMETER CONDUITS MAY NEED WRAPPED SEPARATELY.

CONDUIT BANK

TRAFFIC SIGNAL CONDUIT BANK STANDARDS

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION



Hassan Zahra

CITY ENGINEER

STD DWG
4001

8/01/2015

SHT 5 OF 9

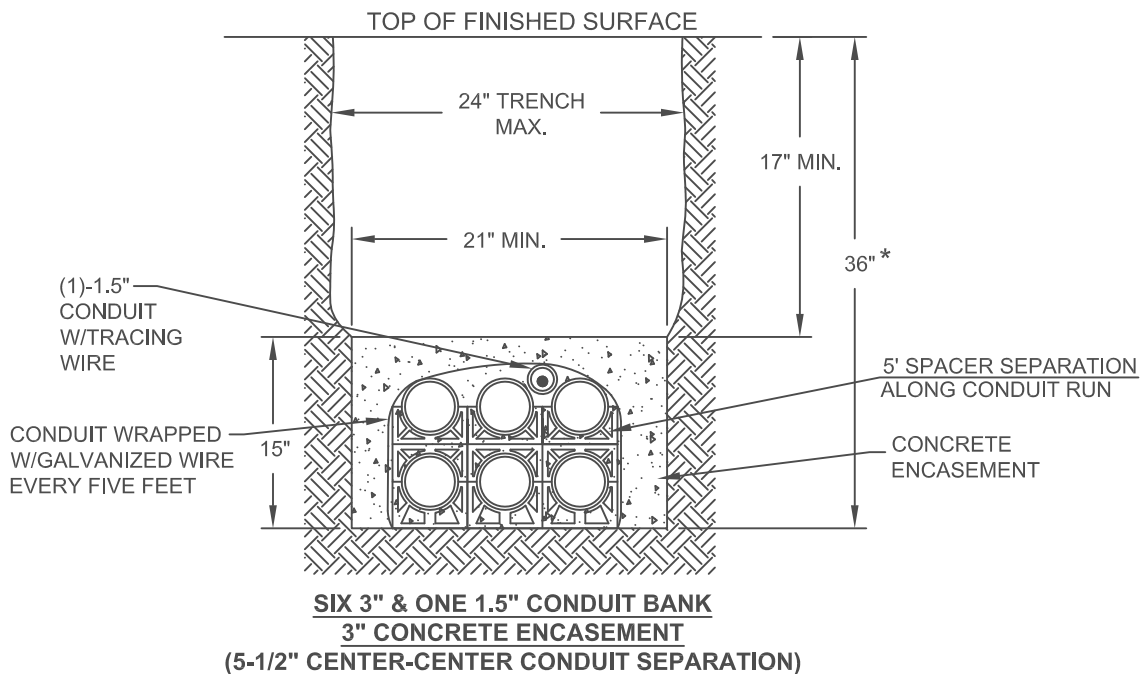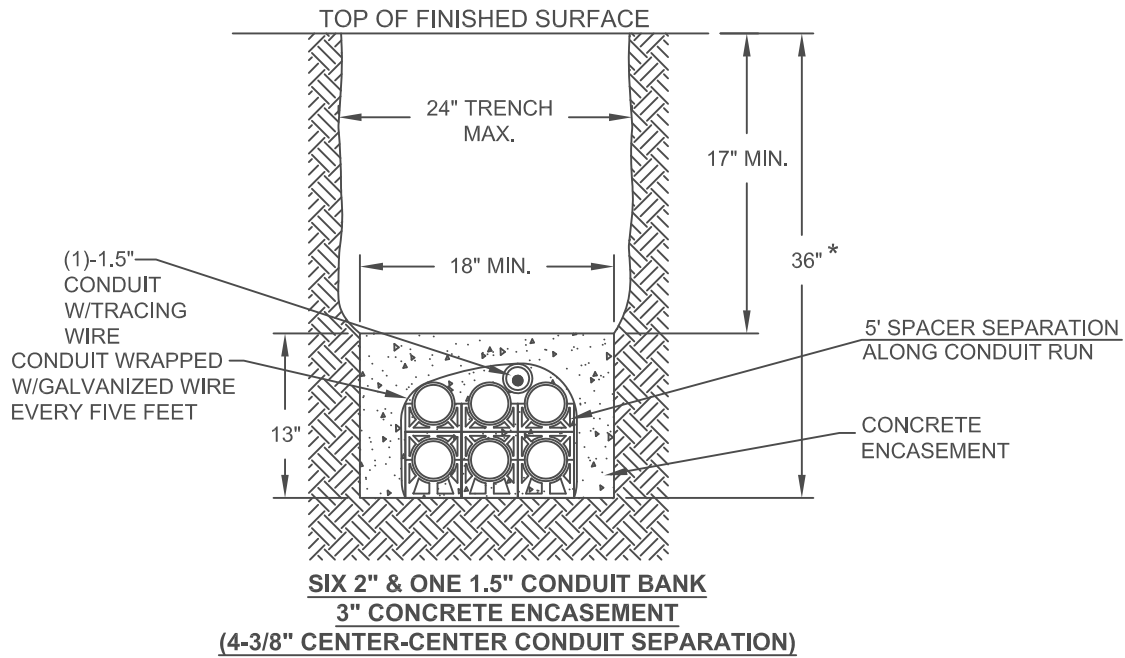

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

NOTES:

ARRANGEMENT OF MULTICELL CONDUIT SHALL BE DETERMINED BY DESIGN.

SMALLER DIAMETER CONDUITS MAY NEED WRAPPED SEPARATELY.

CONDUIT BANK

TRAFFIC SIGNAL CONDUIT BANK STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG
4001

8/01/2015

SHT 6 OF 9

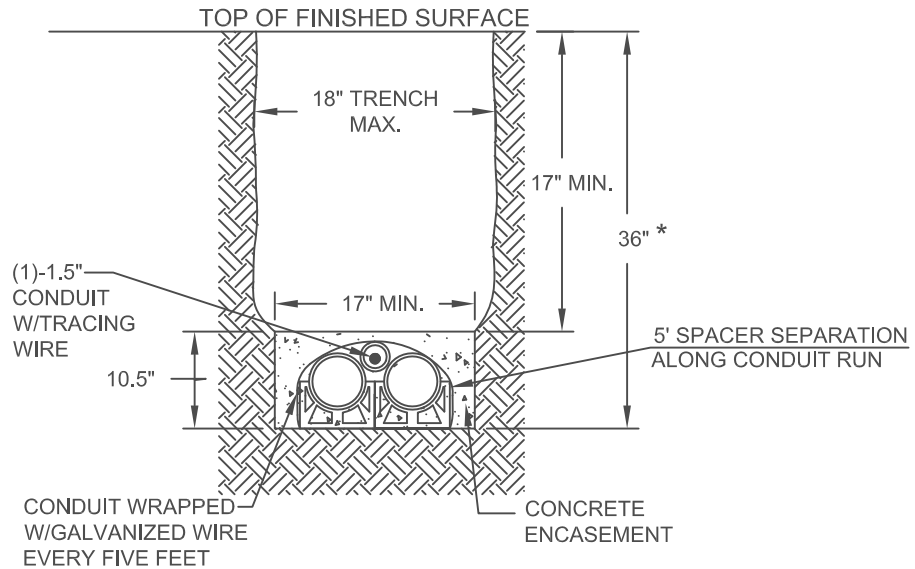

TWO 4" CONDUITS W/ONE 1.5" CONDUIT BANK FOR TRACER
WITH 3" CONCRETE ENCASEMENT
(6-1/2" CENTER-CENTER CONDUIT SEPARATION)

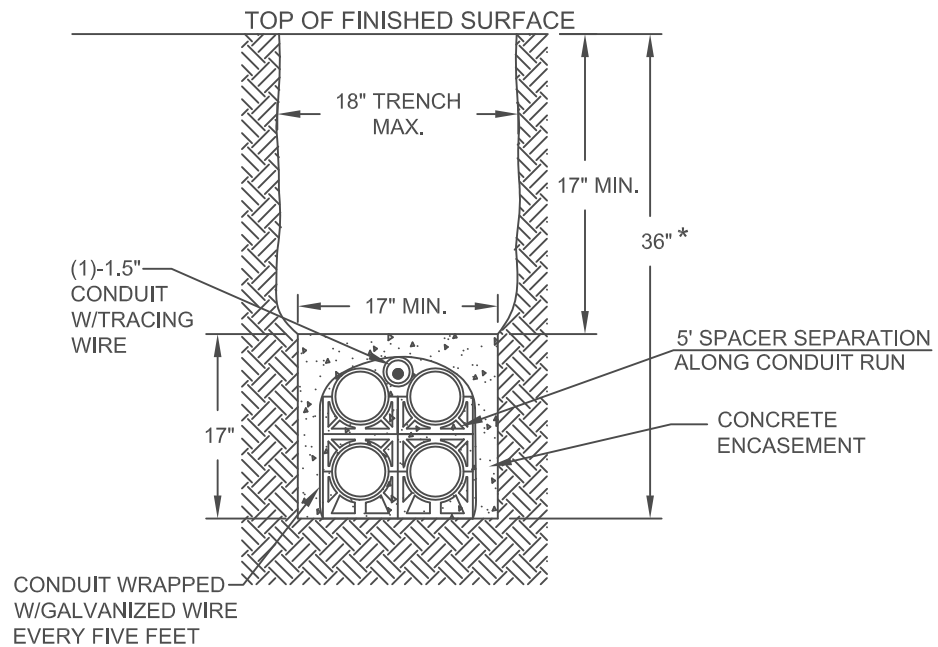

FOUR 4" CONDUITS W/ONE 1.5" CONDUIT BANK FOR TRACER
WITH 3" CONCRETE ENCASEMENT
(6-1/2" CENTER-CENTER CONDUIT SEPARATION)

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

CONDUIT BANK

NOTES:

ARRANGEMENT OF MULTICELL CONDUIT
SHALL BE DETERMINED BY DESIGN.

SMALLER DIAMETER CONDUITS MAY NEED
WRAPPED SEPARATELY.

TRAFFIC SIGNAL CONDUIT BANK STANDARDS

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahra

CITY ENGINEER

STD DWG
4001

8/01/2015

SHT 7 OF 9

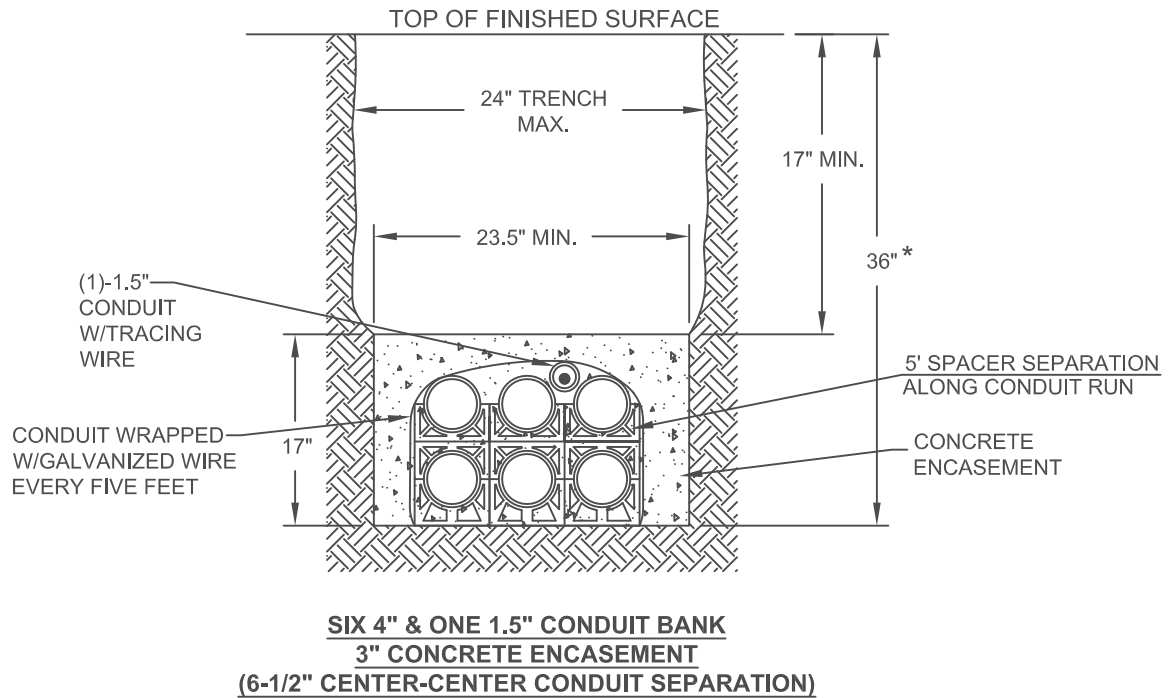

* TRENCH DEPTH MAY VARY PER PLAN DETAILS

NOTES:

ARRANGEMENT OF MULTICELL CONDUIT SHALL BE DETERMINED BY DESIGN.

SMALLER DIAMETER CONDUITS MAY NEED WRAPPED SEPARATELY.

CONDUIT BANK

**TRAFFIC SIGNAL
CONDUIT BANK
STANDARDS**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER



**STD DWG
4001**

8/01/2015

SHT 8 OF 9



SHT 9 OF 9

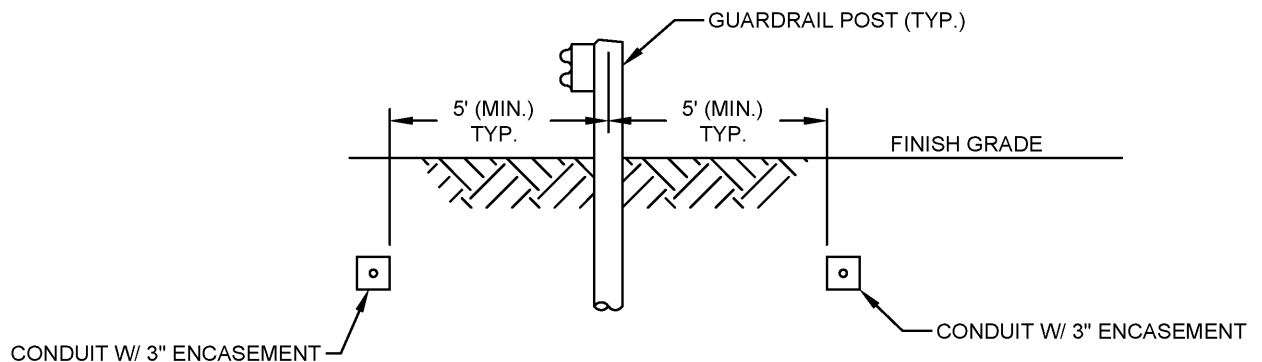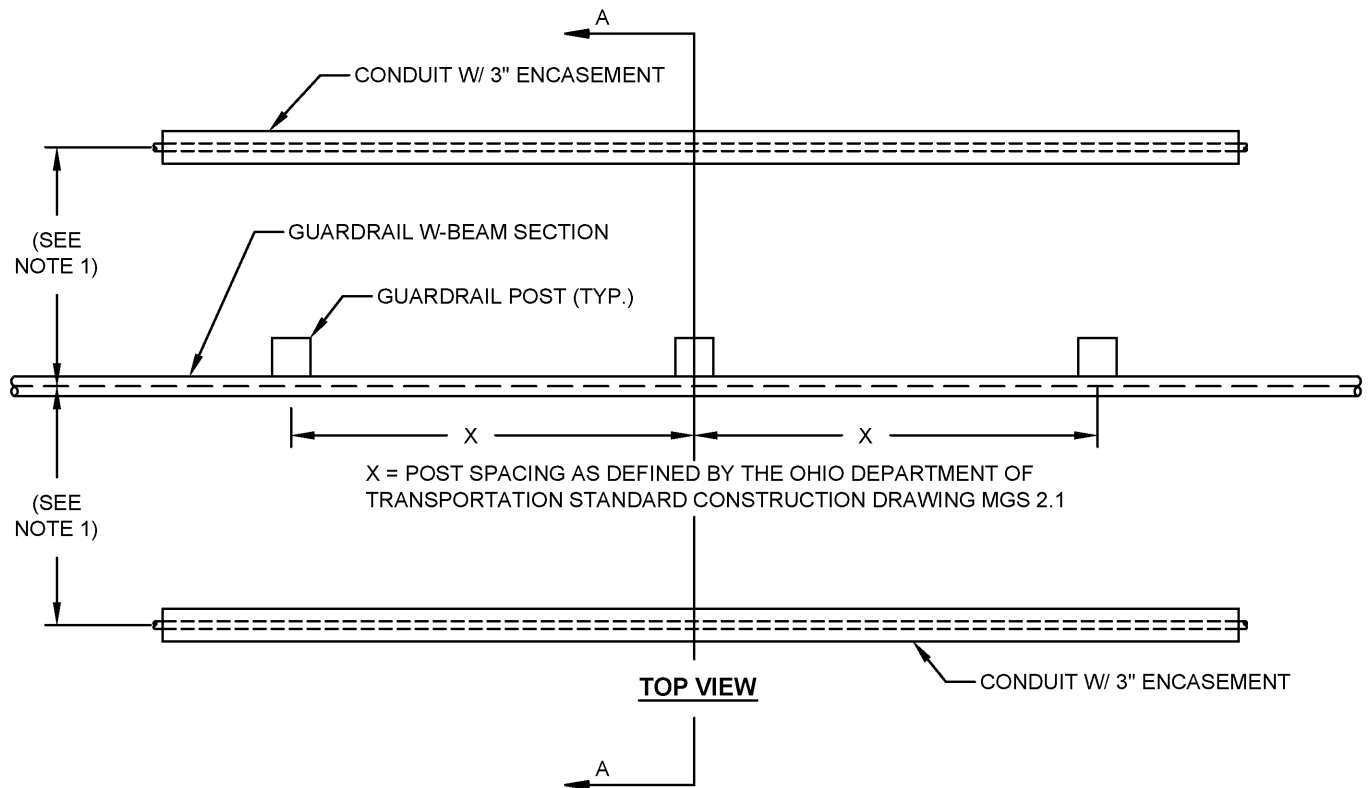

NOTES:

1. CONDUIT PLACED PARALLEL TO GUARDRAIL AND WITH AN OFFSET BETWEEN 5' AND 8' SHALL BE ENCASED. CONDUIT MAY NOT BE PLACED CLOSER THAN 5' WHEN PARALLEL TO GUARDRAIL.
2. CONDUIT ENCASEMENT SHALL EXTEND A MINIMUM OF 10' PAST THE LAST GUARD RAIL POST.

CONDUIT PARALLEL TO GUARDRAIL

CONDUIT GUARDRAIL PROTECTION


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4002


5/01/2014

SHT 1 OF 2

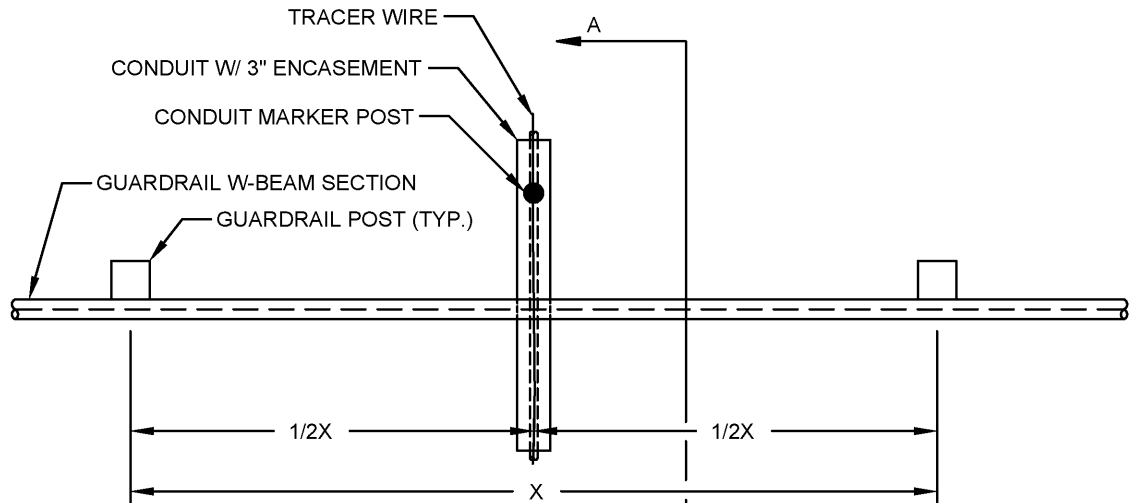

X = POST SPACING AS DEFINED BY THE OHIO DEPARTMENT OF
TRANSPORTATION STANDARD CONSTRUCTION DRAWING MGS 2.1

TOP VIEW

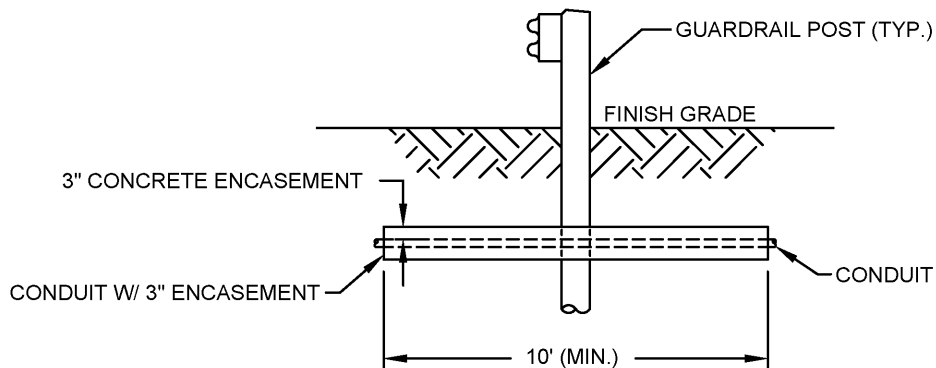

**FRONT VIEW
SECTION A-A**

CONDUIT CROSSING GUARDRAIL

**CONDUIT
GUARDRAIL
PROTECTION**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahran

CITY ENGINEER


**STD DWG
4002**

5/01/2014

SHT 2 OF 2

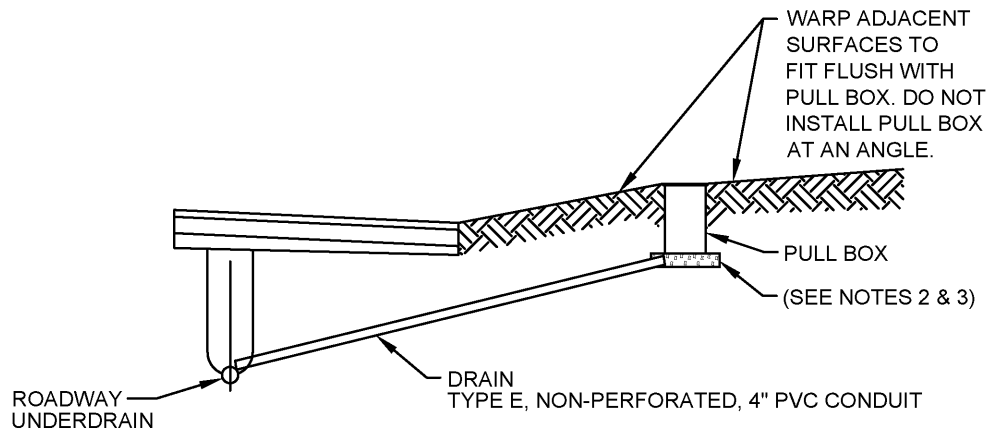

**INSTALLATION WITH CONNECTION TO
ROADWAY UNDERDRAIN**

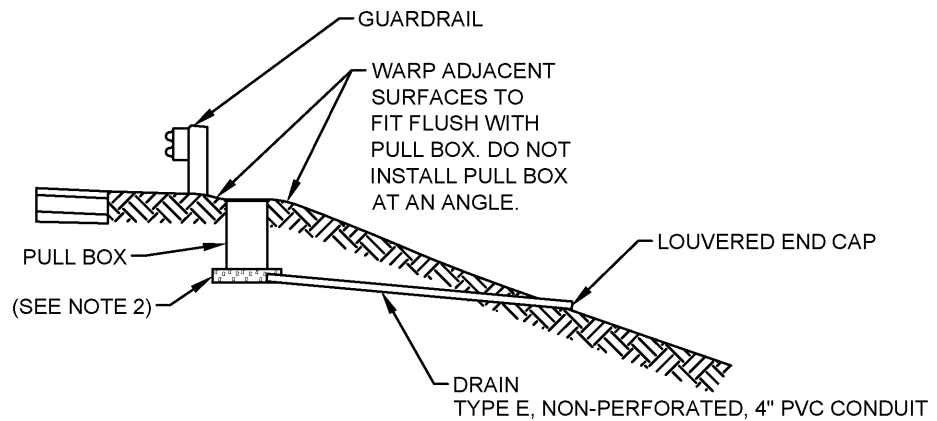

INSTALLATION WITH INDEPENDENT DRAIN

NOTES:

1. AFTER THE CONDUITS HAVE BEEN INSTALLED, ANY OPENING IN THE PULL BOX WALL SHALL BE COMPLETELY FILLED WITH MORTAR OR CONCRETE AND FINISHED FLUSH WITH THE INSIDE PULL BOX WALL. (NO VOIDS)
2. PULL BOX DRAINS IN ACCORDANCE WITH CMSC 603 SHALL BE INSTALLED WHEN SPECIFIED, OR AS DIRECTED BY THE ENGINEER.
3. CONTRACTOR TO VERIFY ROADWAY UNDERDRAIN IS BELOW THE PULL BOX AGGREGATE BEFORE INSTALLING DRAIN.

PULL BOX UNDERDRAIN DETAILS

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION



Hassan Zahran

CITY ENGINEER



**STD DWG
4020**

5/01/2014


SHT 1 OF 1

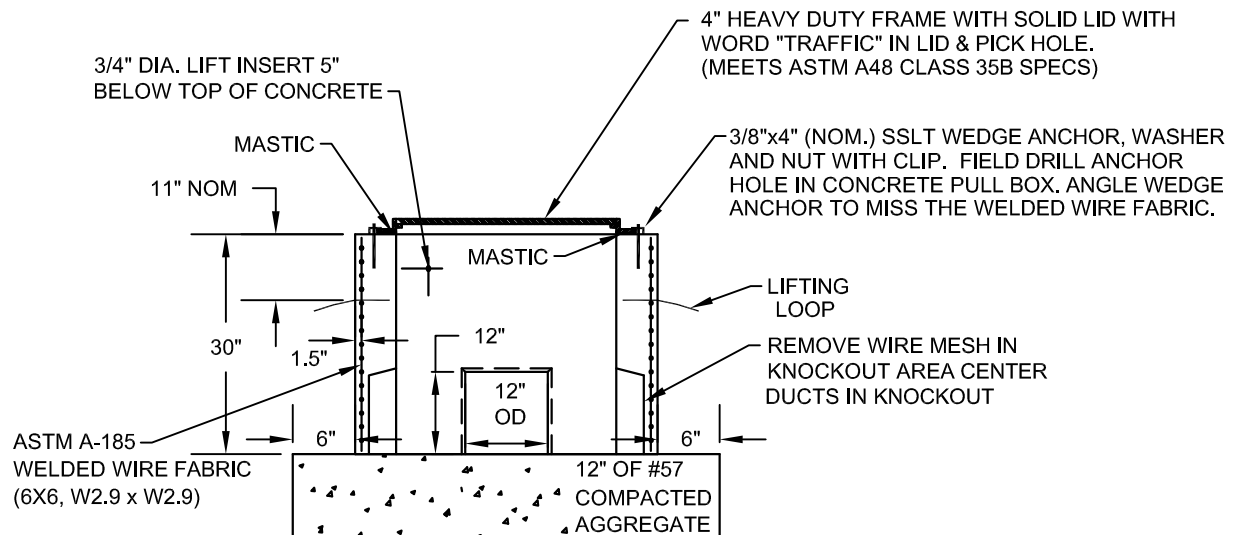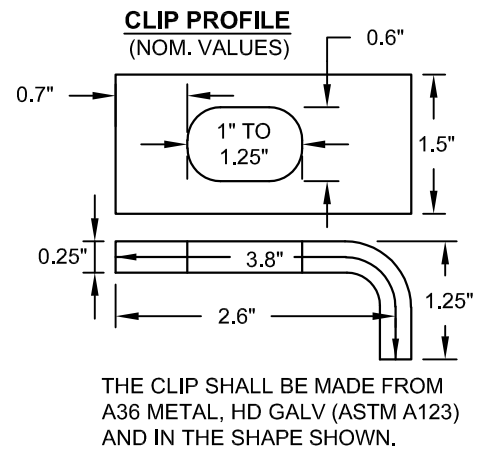

SHT 1 OF 3

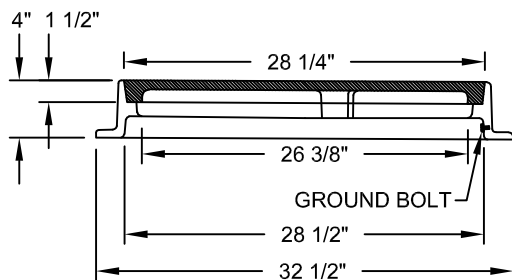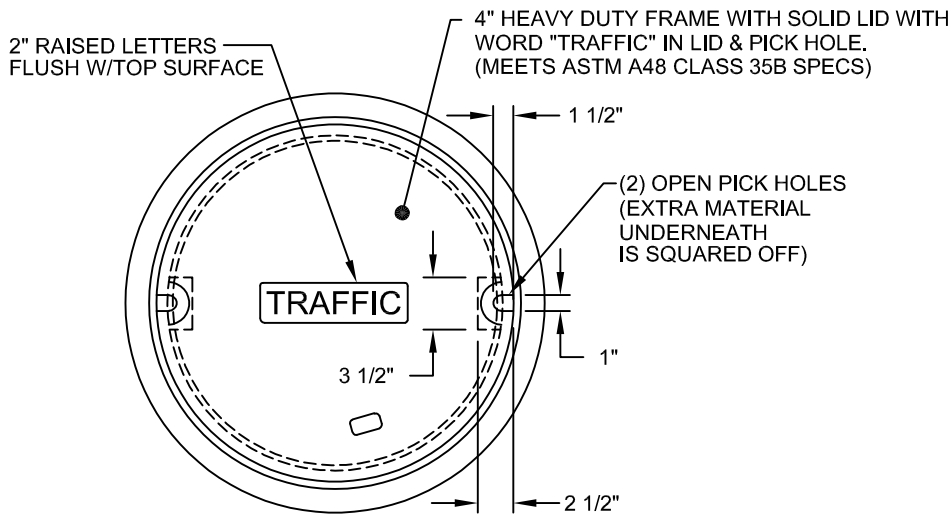

FRAME AND COVER DETAIL

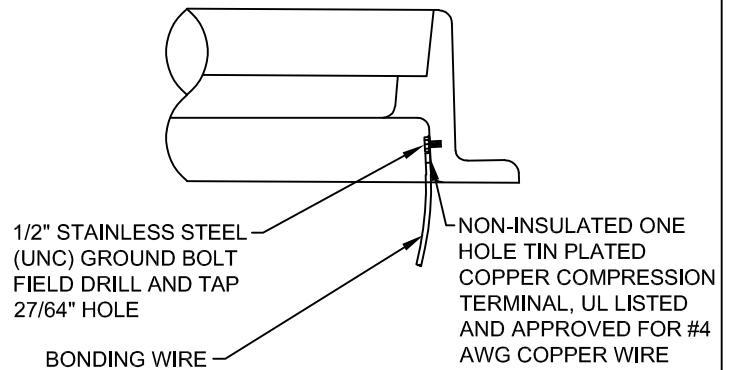

GROUND BOLT INSTALLATION DETAIL

PULL BOX 27"

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4021

07/01/2020

SHT 2 OF 3

NOTES:

ONE COAT OF WATER REPELLENT SEALER (SEE CITY OF COLUMBUS QUALIFIED PRODUCTS LIST) SHALL BE APPLIED TO THE INSIDE & OUTSIDE OF THE PULL BOX.

CONCRETE SHALL HAVE AIR ENTRAINMENT OF $6\% \pm 2\%$ AND SHALL HAVE 4500 PSI STRENGTH AT 28 DAYS.

LID RING LOAD TRANSFER IS TO BE DISTRIBUTED BY USE OF A PREFORMED MASTIC JOINT MATERIAL.

CUT OFF CONDUITS SO THEY EXTEND NO MORE THAN THREE INCHES BEYOND THE INSIDE PULL BOX WALL AND PROVIDE BUSHINGS.

WHENEVER POSSIBLE, CONDUITS SHOULD ENTER THE PULL BOX VIA A KNOCKOUT. WHEN APPROVED BY THE DIVISION OF DESIGN AND CONSTRUCTION PERSONNEL, CONDUITS MAY ENTER THE PULL BOX THROUGH ITS WALL ONLY IF THE OPENING IS SAWN OR CORE DRILLED. CONDUITS SHALL NOT ENTER VIA THE BOTTOM OF THE PULL BOX WITHOUT APPROVAL BY THE DIVISION OF DESIGN AND CONSTRUCTION PERSONNEL. CONDUIT SHALL ENTER KNOCKOUT AS CLOSE TO 90° AS POSSIBLE.

THE WEDGE ANCHOR ASSEMBLY SHALL BE OMITTED WHENEVER THE ENTIRE AREA ABOVE THE KNOCKOUT (1/4 OF THE CASTING) IS EITHER ENCASED IN CONCRETE OR ASPHALT. THE ENCASEMENT SHALL BE CENTERED AROUND THE KNOCKOUT.

ENLARGING THE KNOCKOUT AREA IF REQUIRED SHALL BE DONE BY SAW CUTTING THE CONCRETE. NO OTHER METHOD IS ALLOWED. CONTRACTOR SHALL REPLACE THE CONCRETE HOUSING IF DAMAGED AT HIS EXPENSE.

AFTER THE CONDUITS HAVE BEEN INSTALLED, ANY OPENING IN THE PULL BOX WALL SHALL BE TOTALLY FILLED WITH MORTAR OR CONCRETE AND FINISHED FLUSH WITH THE INSIDE PULL BOX WALL. (NO VOIDS)

PULL BOX BEARING CAPACITY TO EXCEED 40,000 POUNDS.

ANY CONDUIT THAT EXITS A PULL BOX AND DIRECTLY ENTERS ANY ELECTRONIC CABINET SHALL BE SEALED USING DUCT SEAL AND STEEL WOOL AT BOTH THE CABINET AND THE PULL BOX. AT LEAST THREE LAYERS OF EACH MATERIAL SHALL BE USED AND SHALL BE INSTALLED IN AN ALTERNATING PATTERN.

THE CONTRACTOR SHALL INSTALL NON-ORGANIC FIBERGLASS PULL TAPE WITH A MINIMUM 1800 FT./LBS TENSION STRENGTH IN CONDUIT TO FACILITATE CABLE PLACEMENT.

ALL UNUSED CONDUITS SHALL BE CAPPED AND THE CAPS SECURED TO THE CONDUITS WITH TAPE.

THE WORD "TRAFFIC" SHALL BE CAST IN THE LID WITH 2" RAISED LETTERS. SEPARATE, BONDED, OR WELDED TAGS SHALL NOT BE USED.

PULL BOX 27"

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION






CITY ENGINEER

STD DWG
4021

07/01/2020

SHT 3 OF 3

SHT 1 OF 3

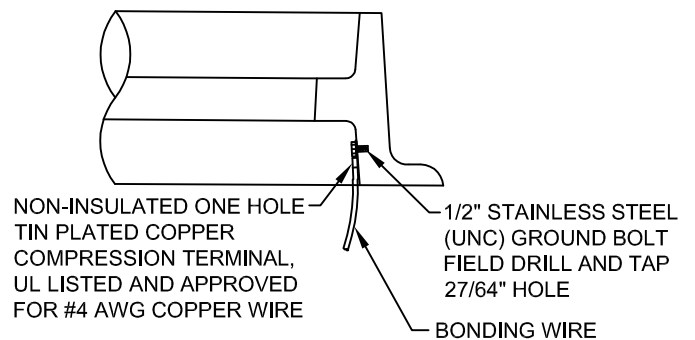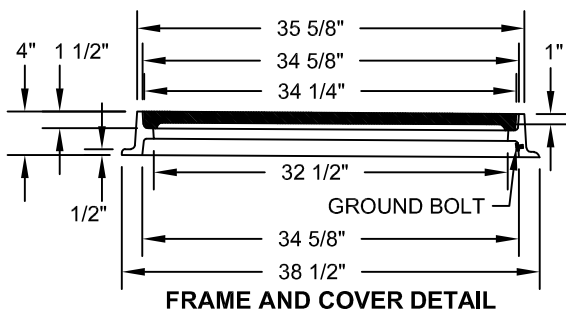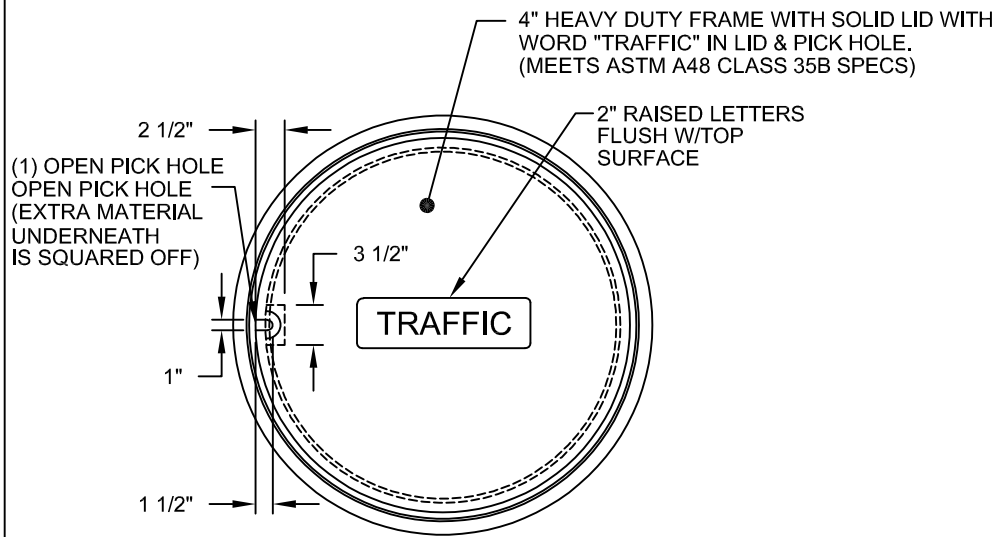

GROUND BOLT INSTALLATION DETAIL

PULL BOX 32"

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4022

07/01/2020

SHT 2 OF 3

NOTES:

ONE COAT OF WATER REPELLENT SEALER (SEE CITY OF COLUMBUS QUALIFIED PRODUCTS LIST) SHALL BE APPLIED TO THE INSIDE AND OUTSIDE OF THE PULL BOX.

CONCRETE SHALL HAVE AIR ENTRAINMENT OF $6\% \pm 2\%$ AND SHALL HAVE 4500 PSI STRENGTH AT 28 DAYS. CONCRETE MATERIALS SHALL MEET ODOT SPECIFICATIONS. STANDARD PLACEMENT FOR WIRE MESH & REBAR SHALL BE USED.

LID RING LOAD TRANSFER IS TO BE DISTRIBUTED BY USE OF A PREFORMED MASTIC JOINT MATERIAL.

CUT OFF CONDUITS SO THEY EXTEND NO MORE THAN THREE INCHES BEYOND THE INSIDE PULL BOX WALL AND PROVIDE BUSHINGS.

WHENEVER POSSIBLE, CONDUITS SHOULD ENTER THE PULL BOX VIA A KNOCKOUT. WHEN APPROVED BY THE DIVISION OF DESIGN AND CONSTRUCTION PERSONNEL, CONDUITS MAY ENTER THE PULL BOX THROUGH ITS WALL ONLY IF THE OPENING IS SAWN OR CORE DRILLED. CONDUITS SHALL NOT ENTER VIA THE BOTTOM OF THE PULL BOX WITHOUT APPROVAL BY THE DIVISION OF DESIGN AND CONSTRUCTION PERSONNEL. CONDUIT SHALL ENTER KNOCKOUT AS CLOSE TO 90° AS POSSIBLE.

THE WEDGE ANCHOR ASSEMBLY SHALL BE OMITTED WHENEVER THE ENTIRE AREA ABOVE THE KNOCKOUT (1/4 OF THE CASTING) IS EITHER ENCASED IN CONCRETE OR ASPHALT. THE ENCASEMENT SHALL BE CENTERED AROUND THE KNOCKOUT.

AFTER THE CONDUITS HAVE BEEN INSTALLED, ANY OPENING IN THE PULL BOX WALL SHALL BE TOTALLY FILLED WITH MORTAR OR CONCRETE AND FINISHED FLUSH WITH THE INSIDE PULL BOX WALL. (NO VOIDS)

PULL BOX BEARING CAPACITY TO EXCEED 40,000 POUNDS.

ENLARGING THE KNOCKOUT AREA IF REQUIRED SHALL BE DONE BY SAW CUTTING THE CONCRETE. NO OTHER METHOD IS ALLOWED. CONTRACTOR SHALL REPLACE THE CONCRETE HOUSING IF DAMAGED AT HIS EXPENSE.

ANY CONDUIT THAT EXITS A PULL BOX AND DIRECTLY ENTERS ANY ELECTRONIC CABINET SHALL BE SEALED USING DUCT SEAL AND STEEL WOOL AT BOTH THE CABINET AND THE PULL BOX. AT LEAST THREE LAYERS OF EACH MATERIAL SHALL BE USED AND SHALL BE INSTALLED IN AN ALTERNATING PATTERN.

THE CONTRACTOR SHALL INSTALL NON-ORGANIC FIBERGLASS PULL TAPE WITH A MINIMUM 1800 FT./LBS TENSION STRENGTH IN CONDUIT TO FACILITATE CABLE PLACEMENT.

ALL UNUSED CONDUITS SHALL BE CAPPED AND THE CAPS SECURED TO THE CONDUITS WITH TAPE.

THE WORD "TRAFFIC" SHALL BE CAST IN THE LID WITH 2" RAISED LETTERS. SEPARATE, BONDED, OR WELDED TAGS SHALL NOT BE USED.

**PULL BOX
32"**


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4022**

CITY ENGINEER



07/01/2020

SHT 3 OF 3

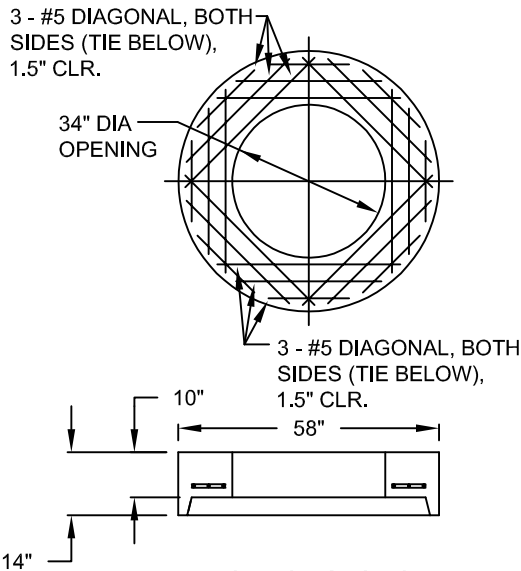

PULL BOX TOP SECTION DETAIL

THE CLIP SHALL BE MADE FROM A36 METAL, HD GALV (ASTM A123) AND IN THE SHAPE SHOWN.

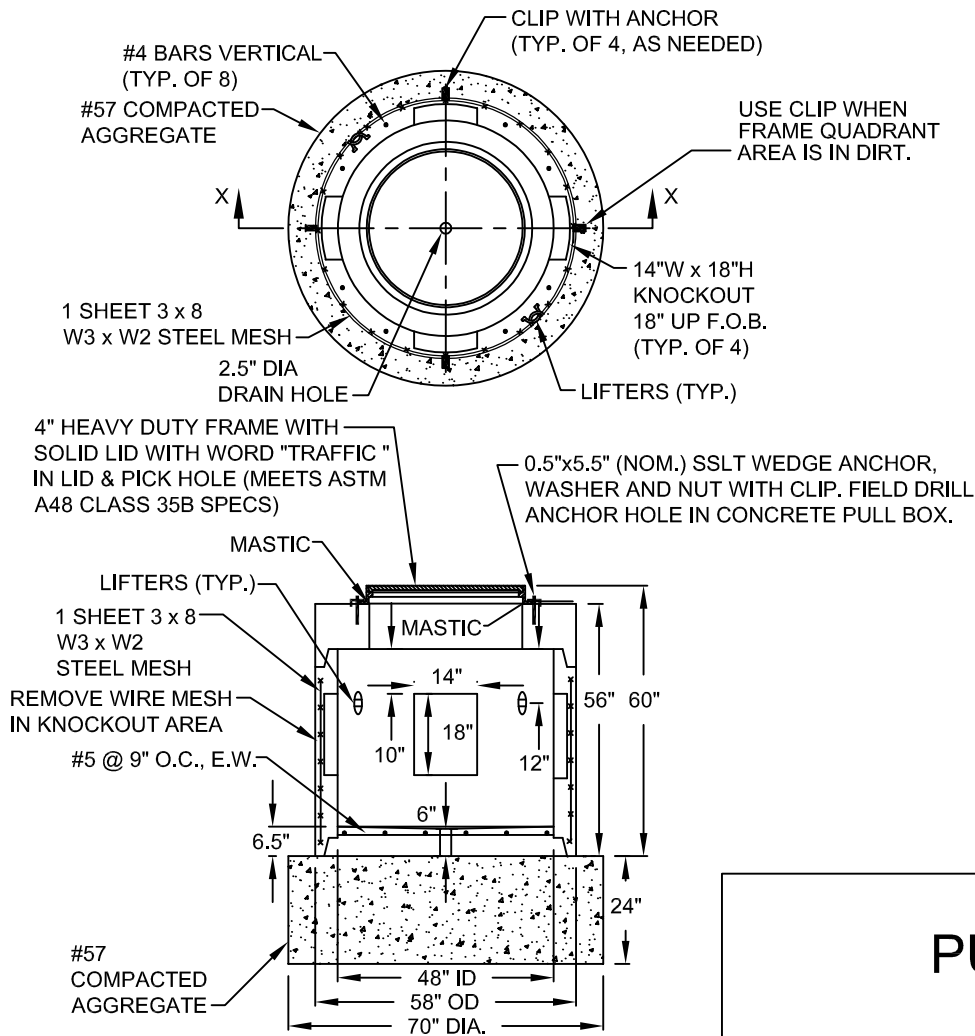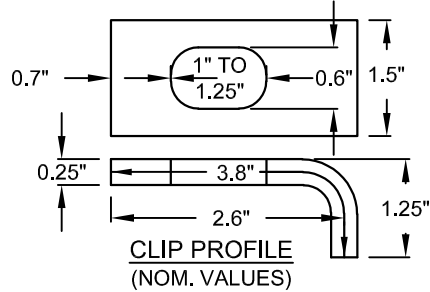

**SECTION X-X
PULL BOX WITH
FRAME AND LID
TYPE 1**

TYPE 1

**PULL BOX
48"**




CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4023

07/01/2020

CITY ENGINEER

SHT 1 OF 4

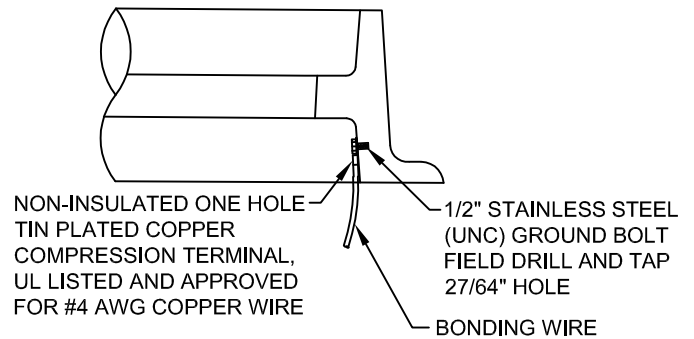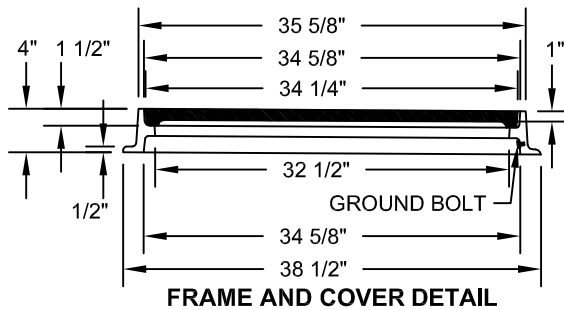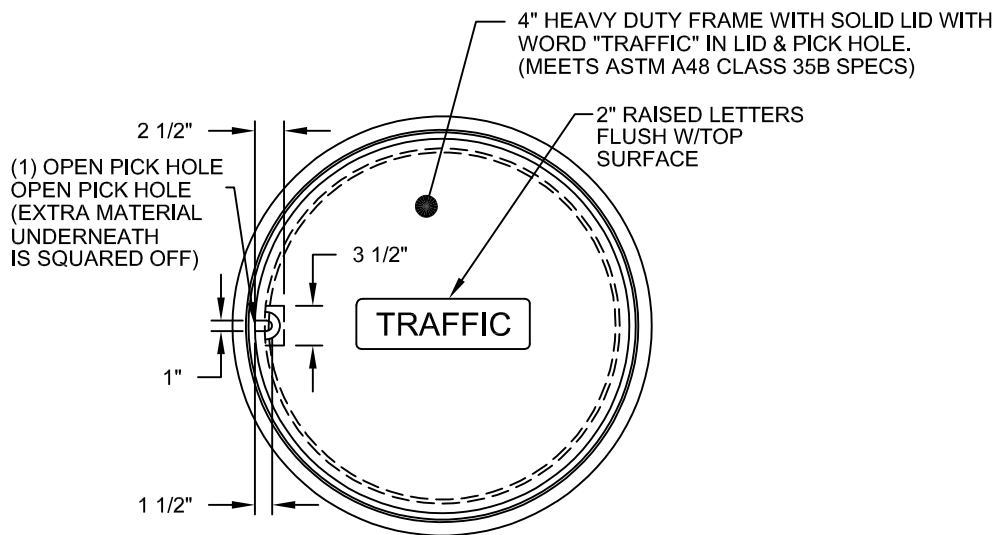

GROUND BOLT INSTALLATION DETAIL

PULL BOX 48"

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4023

07/01/2020

SHT 3 OF 4

NOTES:

ONE COAT OF WATER REPELLENT SEALER (SEE CITY OF COLUMBUS QUALIFIED PRODUCTS LIST) SHALL BE APPLIED TO THE INSIDE AND OUTSIDE OF THE PULL BOX.

CONCRETE SHALL HAVE AIR ENTRAINMENT OF $6\% \pm 2\%$ AND SHALL HAVE 4500 PSI STRENGTH AT 28 DAYS. CONCRETE MATERIALS SHALL MEET ODOT SPECIFICATIONS.

LID RING LOAD TRANSFER IS TO BE DISTRIBUTED BY USE OF A PREFORMED MASTIC JOINT MATERIAL.

CUT OFF CONDUITS SO THEY EXTEND NO MORE THAN THREE INCHES BEYOND THE PULL BOX WALL AND PROVIDE BUSHINGS

WHENEVER POSSIBLE, CONDUITS SHOULD ENTER THE PULL BOX VIA A KNOCKOUT. WHEN APPROVED BY THE DIVISION OF DESIGN AND CONSTRUCTION PERSONNEL, CONDUITS MAY ENTER THE PULL BOX THROUGH ITS WALL ONLY IF THE OPENING IS SAWN OR CORE DRILLED. CONDUITS SHALL NOT ENTER VIA THE BOTTOM OF THE PULL BOX WITHOUT APPROVAL BY THE DIVISION OF DESIGN AND CONSTRUCTION PERSONNEL. CONDUIT SHALL ENTER KNOCKOUT AS CLOSE TO 90° AS POSSIBLE.

THE WEDGE ANCHOR ASSEMBLY SHALL BE OMITTED WHENEVER THE ENTIRE AREA ABOVE THE KNOCKOUT (1/4 OF THE CASTING) IS ENCASED IN EITHER CONCRETE OR ASPHALT. THE ENCASEMENT SHALL BE CENTERED AROUND THE KNOCKOUT.

AFTER THE CONDUITS HAVE BEEN INSTALLED, ANY OPENING IN THE PULL BOX WALL SHALL BE TOTALLY FILLED WITH MORTAR OR CONCRETE AND FINISHED FLUSH WITH THE INSIDE PULL BOX WALL (NO VOIDS).

PULL BOX BEARING CAPACITY TO EXCEED 40,000 POUNDS.

ENLARGING THE KNOCKOUT AREA, IF REQUIRED, SHALL BE DONE BY SAW CUTTING THE CONCRETE. NO OTHER METHOD IS ALLOWED. THE CONTRACTOR SHALL REPLACE THE CONCRETE HOUSING, IF DAMAGED, AT THEIR EXPENSE.

ANY CONDUIT THAT EXITS A PULL BOX AND DIRECTLY ENTERS ANY ELECTRONIC CABINET SHALL BE SEALED USING DUCT SEAL AND STEEL WOOL AT BOTH THE CABINET AND THE PULL BOX. AT LEAST THREE LAYERS OF EACH MATERIAL SHALL BE USED AND SHALL BE INSTALLED IN AN ALTERNATING PATTERN.

THE CONTRACTOR SHALL INSTALL NON-ORGANIC FIBERGLASS PULL TAPE WITH A MINIMUM 1800 FT./LBS TENSION STRENGTH IN CONDUIT TO FACILITATE CABLE PLACEMENT.

ALL UNUSED CONDUITS SHALL BE CAPPED AND THE CAPS SECURED TO THE CONDUITS WITH TAPE.

THE WORD "TRAFFIC" SHALL BE CAST IN THE LID WITH 2" RAISED LETTERS. SEPARATE, BONDED, OR WELDED TAGS SHALL NOT BE USED.

STANDARD PLACEMENT FOR WIRE MESH AND REBAR SHALL BE USED.

**PULL BOX
48"**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION




CITY ENGINEER

**STD DWG
4023**

07/01/2020

SHT 4 OF 4

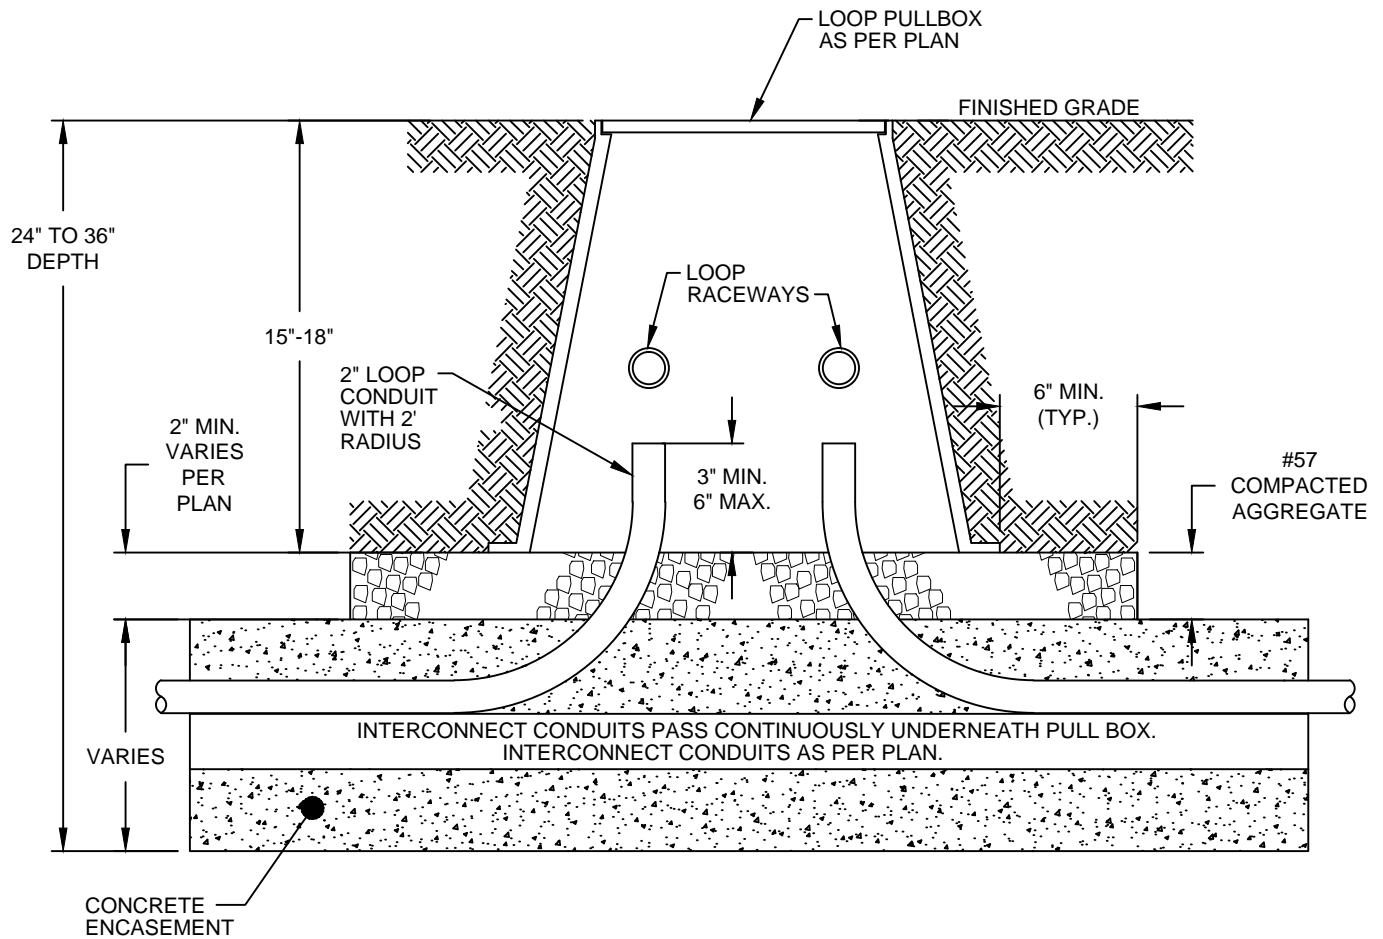

LOOP PULL BOX INSTALLED OVER INTERCONNECT CONDUIT BANK


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4024

8/10/2017

CITY ENGINEER

SHT 1 OF 1

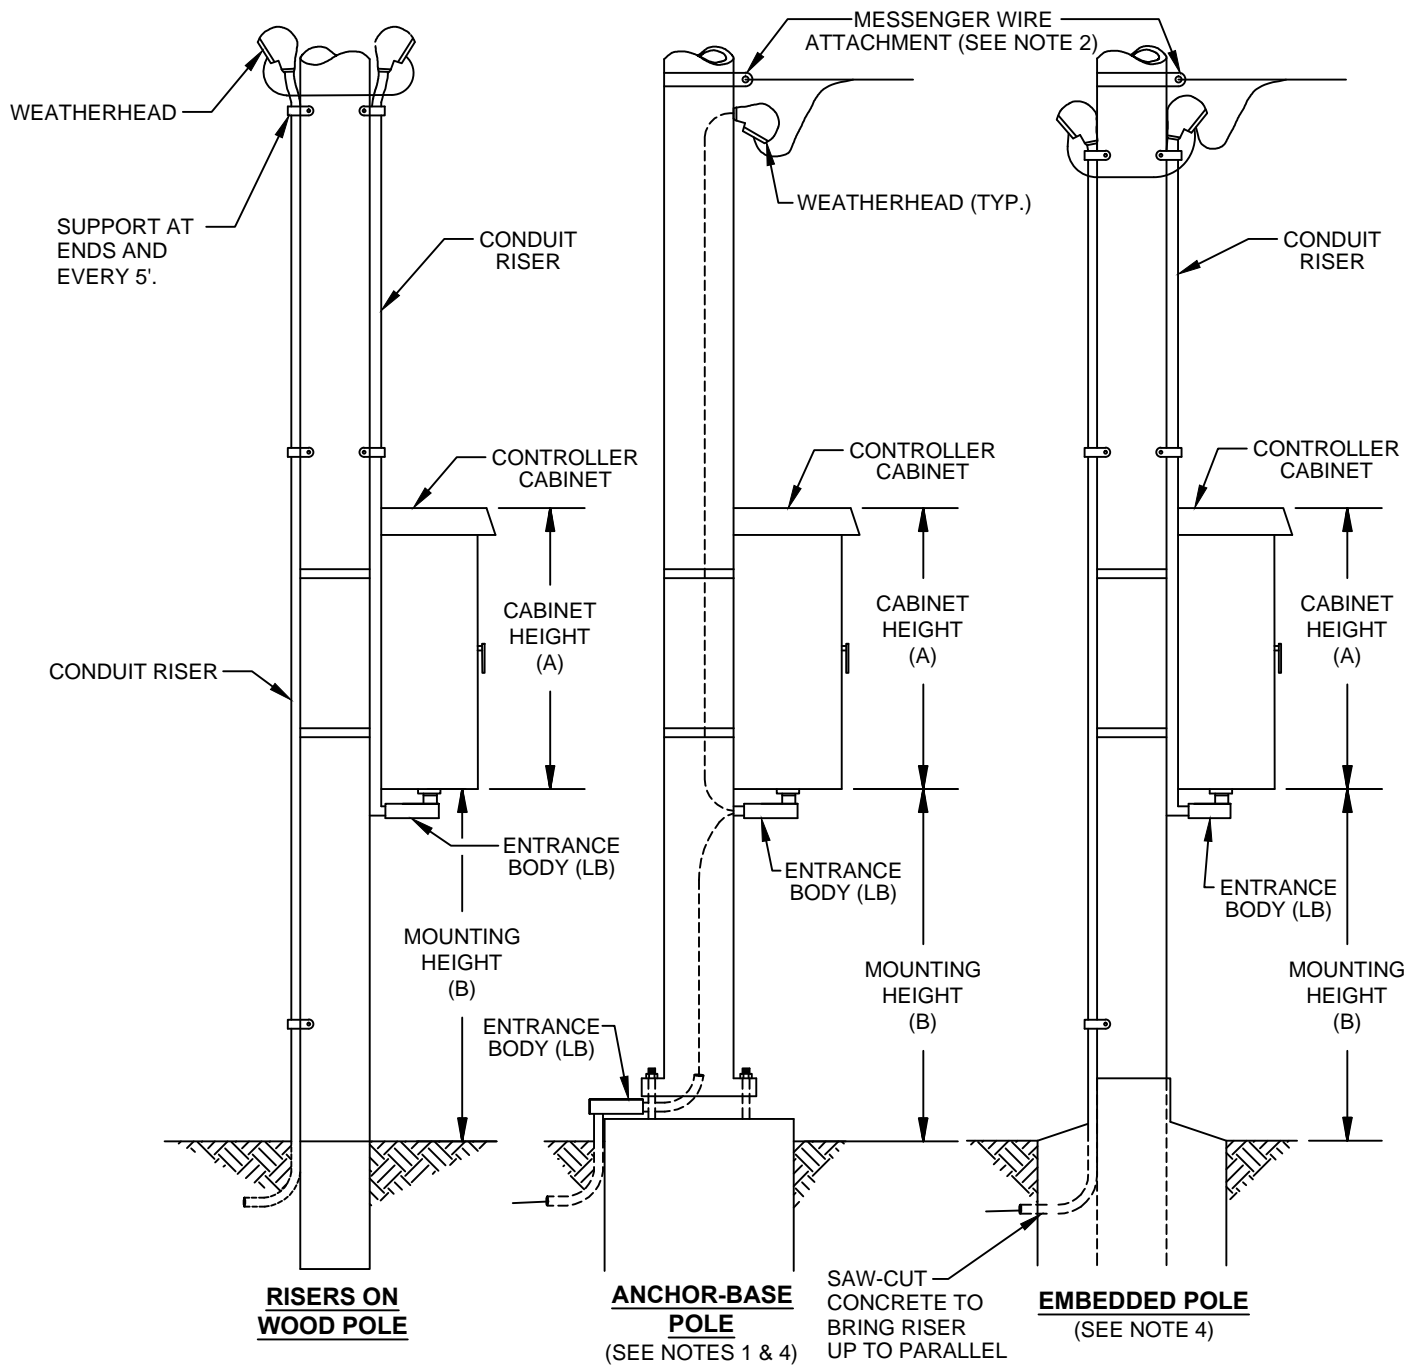

CABINET HEIGHT (A)	MOUNTING HEIGHT (B)
LESS THAN 36"	30" ± 3"
36" AND OVER	23" ± 3"

NOTES:

1. CONDUIT ENTRY AT BASE OF POLE SHOWN IN ANCHOR BASE APPLICATIONS SHALL ONLY BE PERMITTED IF SPECIFIED IN THE CONSTRUCTION PLANS.
2. SEE MESSENGER WIRE DETAILS ON CITY OF COLUMBUS STANDARD DRAWINGS 4330 AND 4331.
3. THESE ARE NOT APPLICABLE FOR POWER SERVICE. SEE CITY OF COLUMBUS STANDARD DRAWING 4052 FOR DETAILS.
4. EXISTING POLE ONLY WITH PRIOR APPROVAL FOR RETRO FIT APPLICATIONS.

SIGNAL CABLE CONDUIT RISER FOR POLE MOUNTED CABINET


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

**STD DWG
4050**

8/10/2017

SHT 1 OF 1

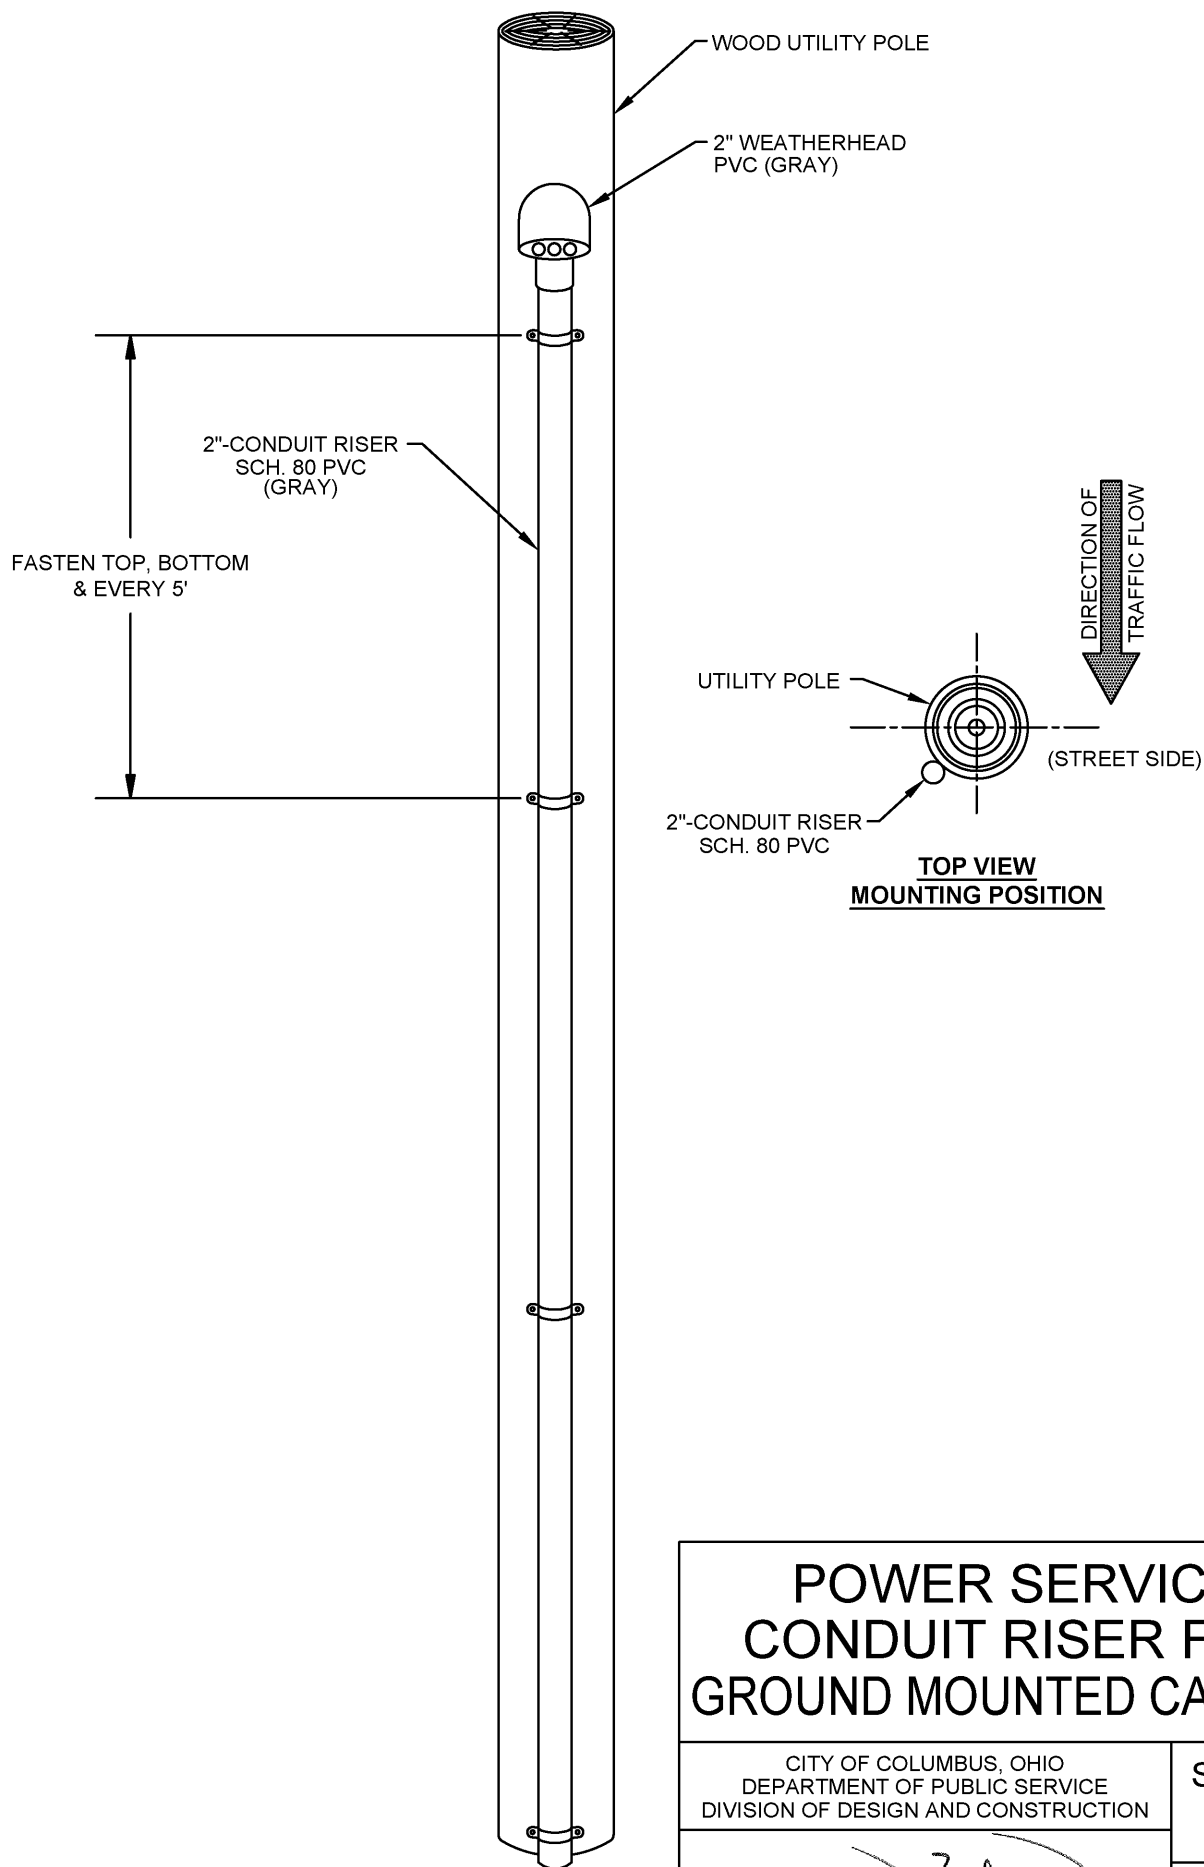

POWER SERVICE CONDUIT RISER FOR GROUND MOUNTED CABINET

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahran

CITY ENGINEER

STD DWG
4051

5/01/2014

SHT 1 OF 1

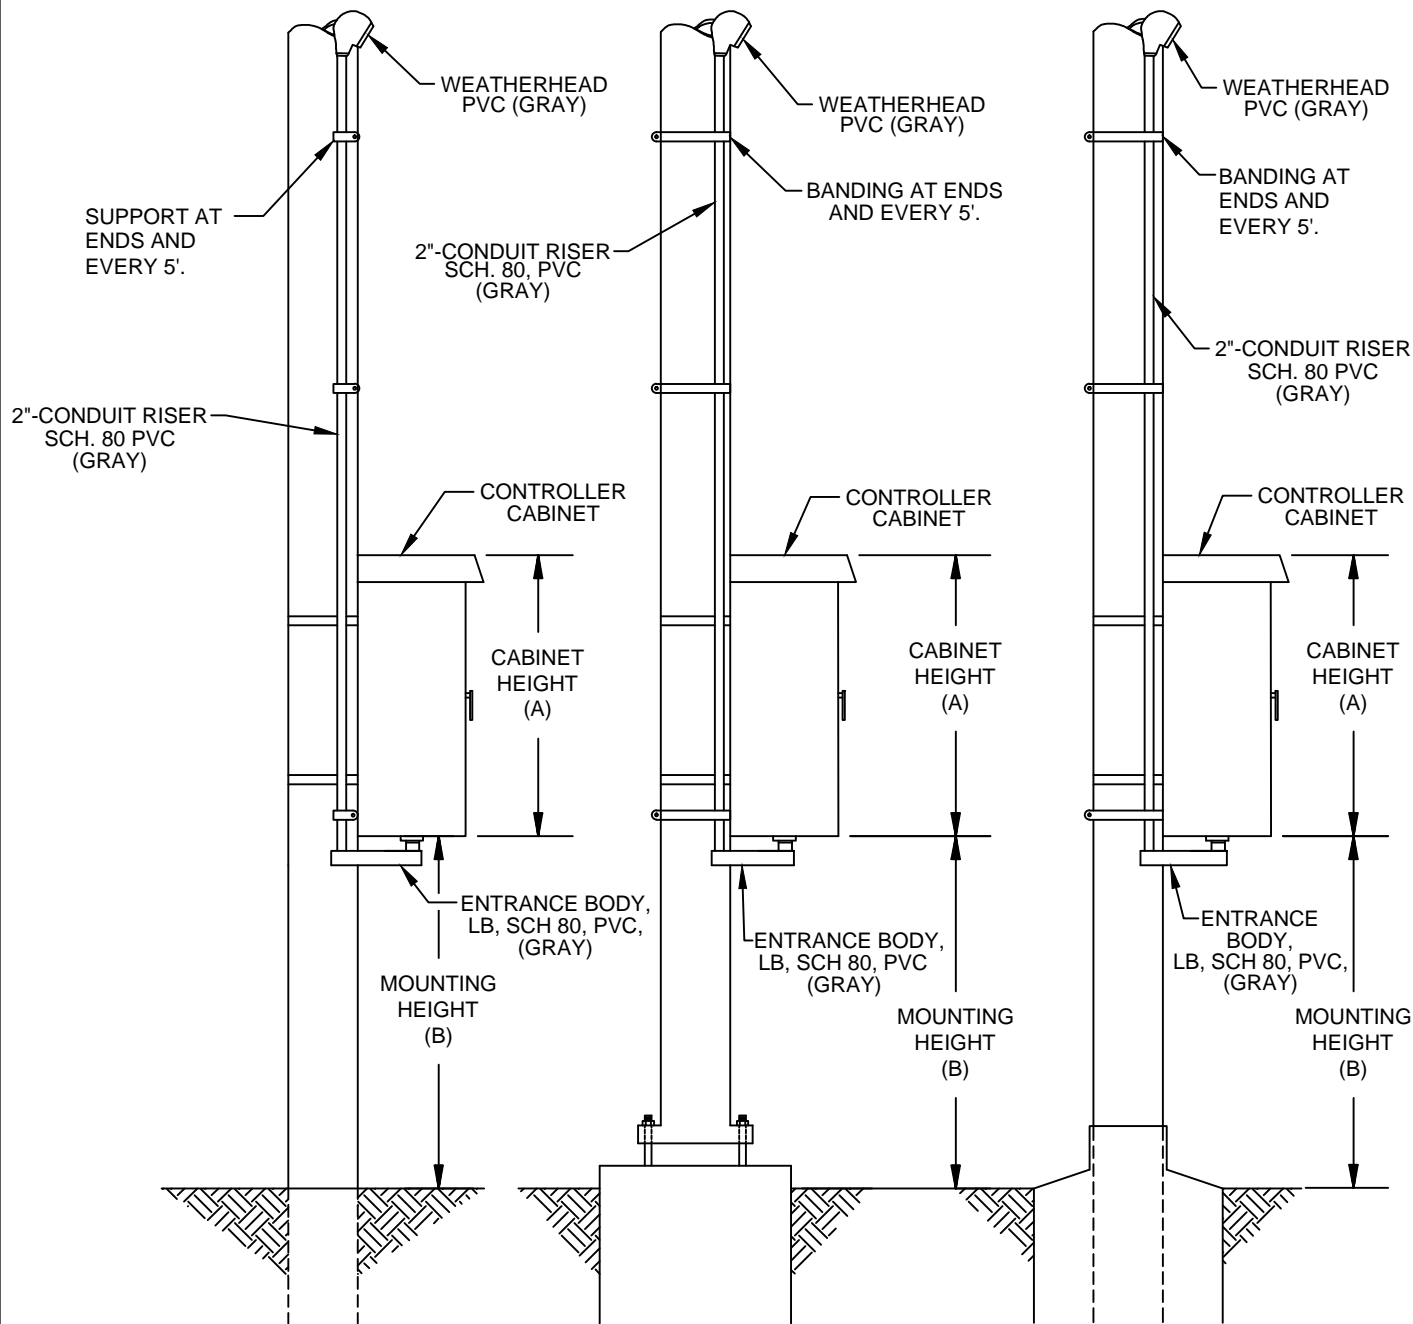

WOOD POLE

**ANCHOR-BASE
POLE**
(SEE NOTE 1)

EMBEDDED POLE
(SEE NOTE 1)

CABINET HEIGHT (A)	MOUNTING HEIGHT (B)
LESS THAN 36"	30" ± 3"
36" AND OVER	23" ± 3"

NOTES:

1. POWER AND CONTROLLER SERVICE FOR METAL POLES SHALL BE SIMILAR TO THAT SHOWN FOR THE WOOD POLE WITH THE EXCEPTION OF THE ATTACHMENT HARDWARE.

POWER SERVICE CONDUIT RISER FOR POLE MOUNTED CABINET

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4052**

8/10/2017

CITY ENGINEER

SHT 1 OF 1



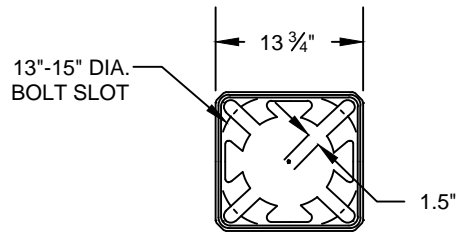


PLATE PEDESTAL BASE

ANCHOR BOLT PATTERN

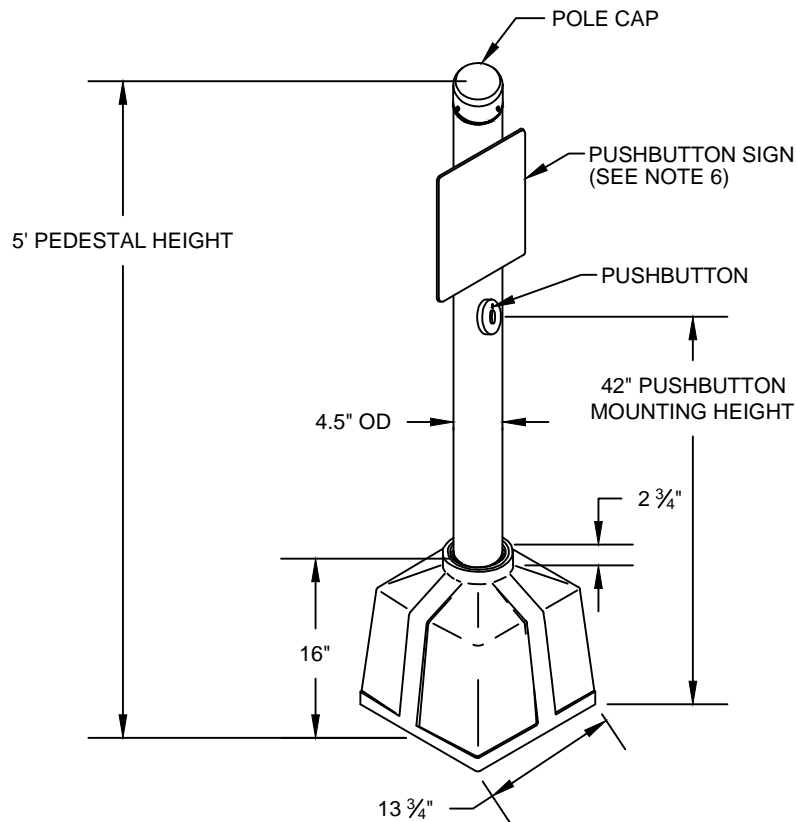

NOTES:

1. PEDESTAL SUPPORTS SHALL BE COATED IN ACCORDANCE WITH THE PLANS.
2. THE POLE SHAFT SHALL BE 46.75" WITH A DIAMETER OF 4" NPT (4.5" OD, SCH 40), & SHALL BE THREADED FOR INSERTION INTO THE BASE.
3. THE 5 FT. STRUCTURE HEIGHT ENCOMPASSES THE BASE HEIGHT PLUS THE INSERTED POLE SHAFT HEIGHT.
4. THE PUSHBUTTON STRUCTURE SHALL BE ALL ALUMINUM.
5. FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD DRAWING 4163.
6. FOR PUSHBUTTON SIGN DETAILS, SEE CITY OF COLUMBUS STANDARD DRAWING 4230.

5' PEDESTAL PUSHBUTTON MOUNTING



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4100**

CITY ENGINEER

10/01/2018

SHT 1 OF 1

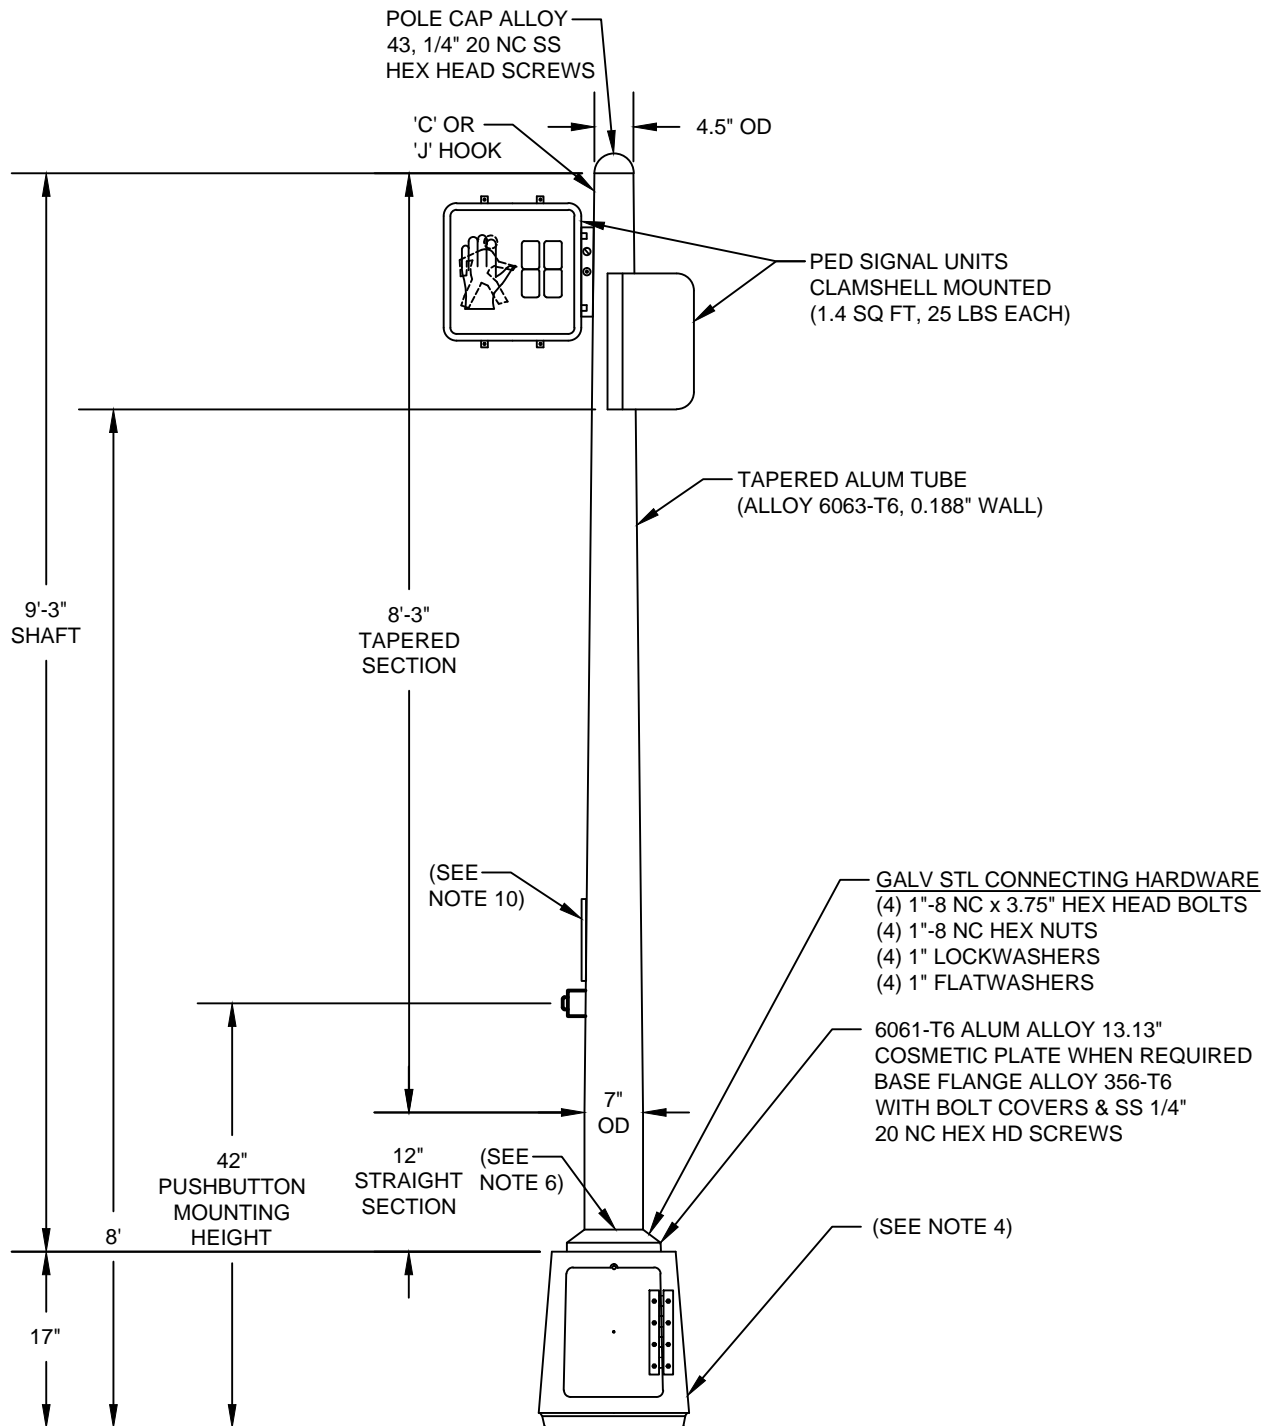

(SEE NOTE 8)

ANCHOR BOLT PATTERN

10.7' PEDESTAL PEDESTRIAN SIGNAL HEAD MOUNTING

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

4101

8/10/2017

CITY ENGINEER

SHT 1 OF 2

NOTES:

1. PEDESTAL SUPPORTS SHALL BE COATED IN ACCORDANCE WITH THE PLANS.
2. PEDESTAL SUPPORTS SHALL BE DESIGNED FOR 90 MPH WINDS, APPROPRIATE GUST FACTOR AND LOADING AS PER PLAN.
3. 4 ANCHOR BOLTS SHALL BE INCLUDED WITH NUTS, LOCK WASHERS AND EIGHT (8) SHIMS.
4. A 17" TRANSFORMER BASE (ALSO KNOWN AS T-BASE) AND ALL CONNECTING HARDWARE SHALL BE FURNISHED WITH EACH PEDESTAL. FOR TRANSFORMER BASE DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4105.
5. THE PEDESTAL SHALL BE FURNISHED AND INSTALLED WITH A POLE SHAFT THAT HAS A COMBINED TAPERED-STRAIGHT CROSS-SECTIONAL DESIGN AND A ONE-PIECE CONSTRUCTION WITH NO LONGITUDINAL OR CIRCUMFERENTIAL WELDS EXCEPT FOR THE WELD NEEDED TO ATTACH THE POLE BASE. THE POLE SHAFT SHALL HAVE A ROUND CROSS-SECTIONAL DESIGN.
6. THE POLE BASE SHALL TELESCOPE THE POLE SHAFT. THE BASE SHALL BE WELDED TO THE POLE SHAFT BY 2 CIRCUMFERENTIAL WELDS: ONE ON THE OUTSIDE OF THE POLE AT THE BASE TOP AND ONE ON THE INSIDE OF THE BASE AT THE POLE BOTTOM.
7. 4 BOLT COVERS AND A POLE CAP SHALL BE FURNISHED AND INSTALLED WITH EACH PEDESTAL. THE POLE BASE PLATE SHALL BE LARGE ENOUGH TO FIT OVER ALL OF THE T-BASE TOP OPENINGS. USING AN ALUMINUM FILLER PLATE ON TOP OF THE T-BASE TO COVER ANY OPENING IS ACCEPTABLE. THE FILLER PLATE SHALL BE MANUFACTURED TO FIT THE T-BASE TOP EXACTLY AND BE AT LEAST 1/8 INCH THICK AND MADE FROM 5052-H32 ALLOY. BOTH SIDES AND THE EDGES OF THE FILLER PLATE SHALL BE COATED TO MATCH THE POLE AND T-BASE.
8. FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4163.
9. THE PEDESTRIAN SIGNAL HEAD HOUSING AND CLAM SHELL MOUNTING BRACKETS SHALL BE BLACK MATCHING FEDERAL STANDARD 595B, COLOR # 27038.
10. FOR PEDESTRIAN PUSHBUTTON SIGN DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4230.

10.7' PEDESTAL PEDESTRIAN SIGNAL HEAD MOUNTING

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


CITY ENGINEER

STD DWG

4101

8/10/2017

SHT 2 OF 2

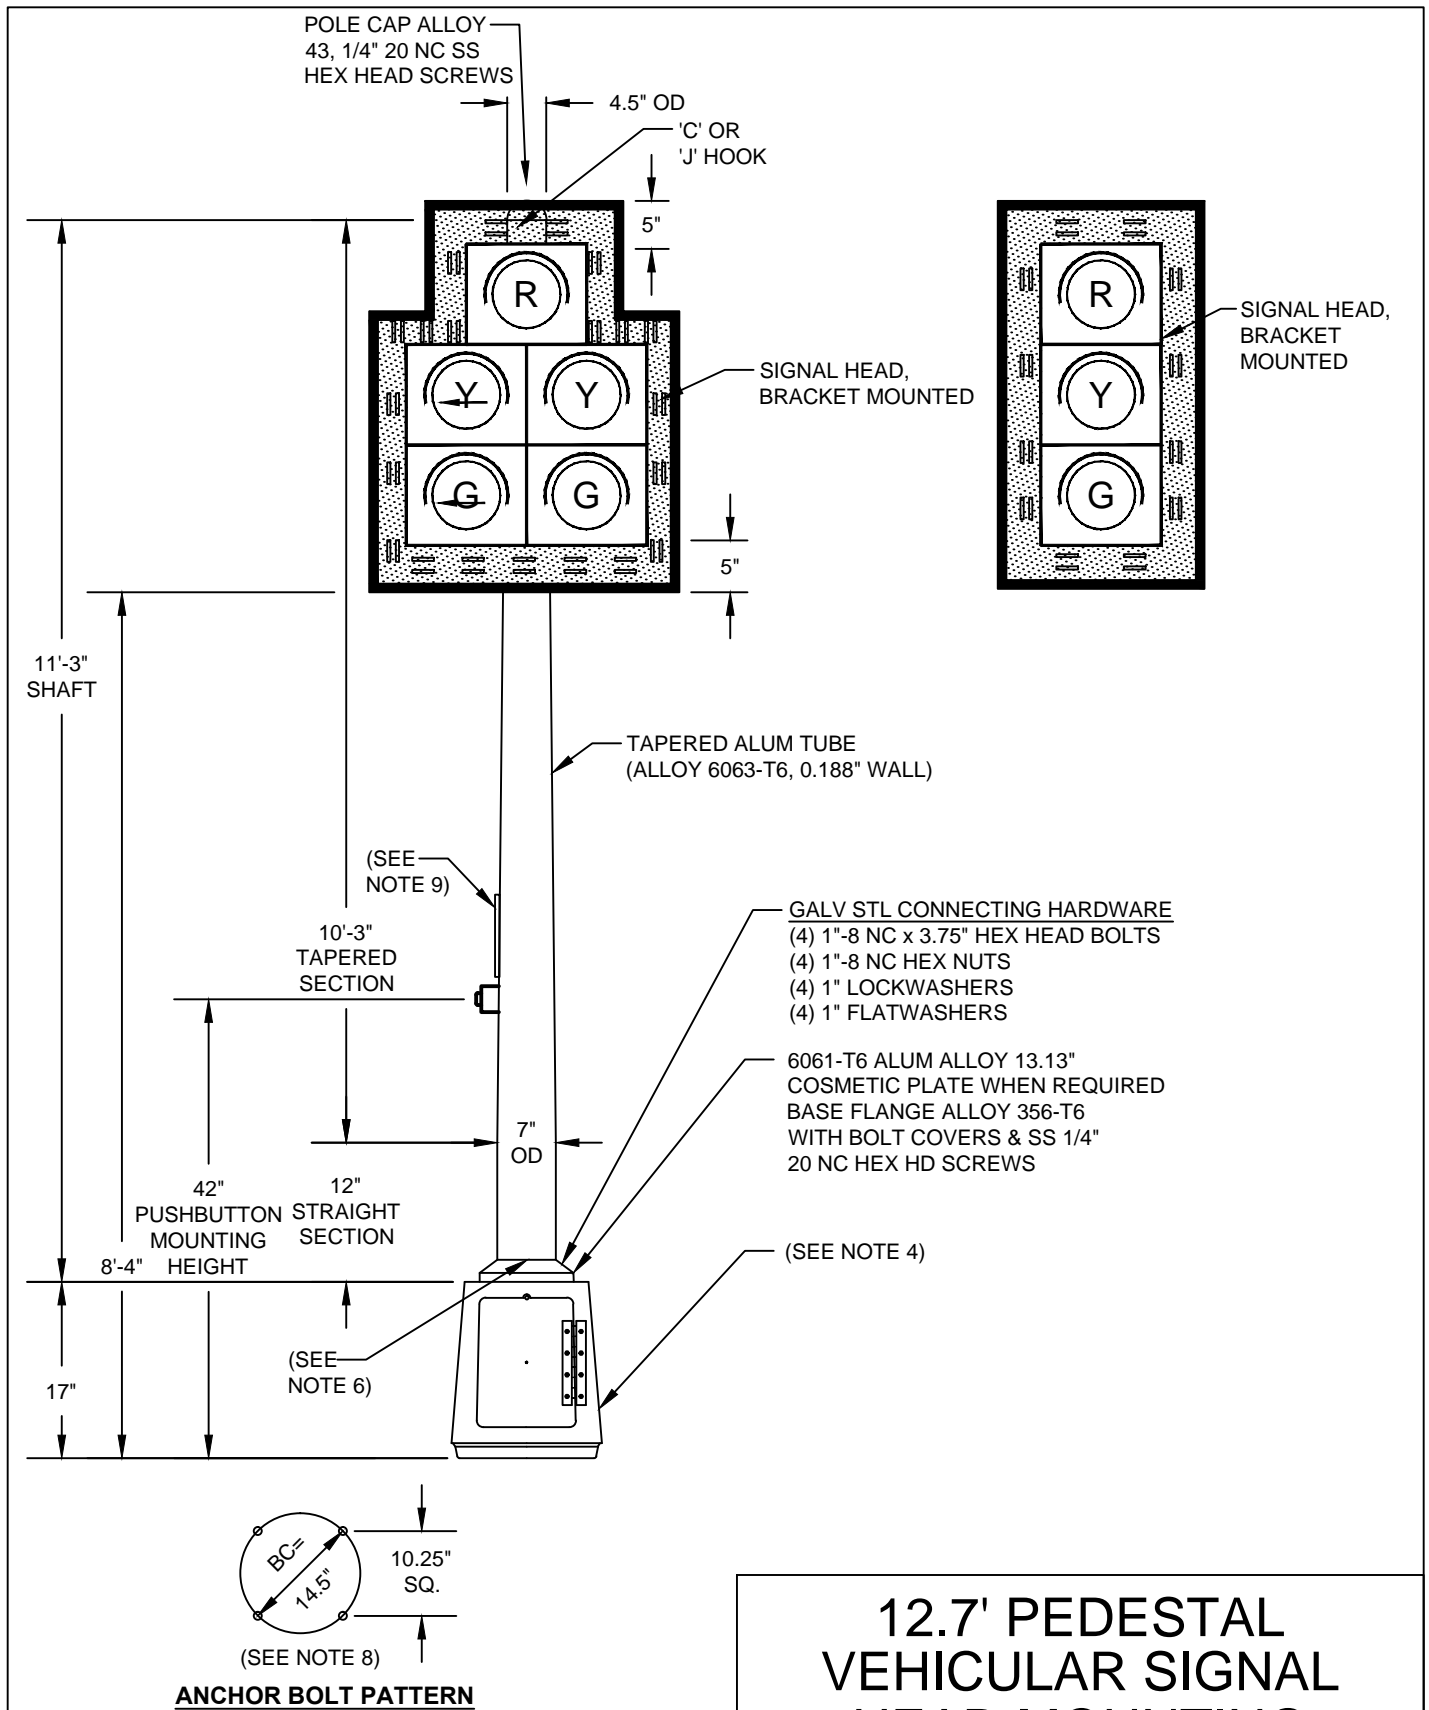

12.7' PEDESTAL VEHICULAR SIGNAL HEAD MOUNTING

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

4102

8/10/2017

SHT 1 OF 2

CITY ENGINEER

NOTES:

1. PEDESTAL SUPPORTS SHALL BE COATED IN ACCORDANCE WITH THE PLANS.
2. PEDESTAL SUPPORTS SHALL BE DESIGNED FOR 90 MPH WINDS, APPROPRIATE GUST FACTOR AND LOADING AS PER PLAN.
3. 4 ANCHOR BOLTS SHALL BE INCLUDED WITH NUTS, LOCK WASHERS AND EIGHT (8) SHIMS.
4. A 17" TRANSFORMER BASE (ALSO KNOWN AS T-BASE) AND ALL CONNECTING HARDWARE SHALL BE FURNISHED WITH EACH PEDESTAL. FOR TRANSFORMER BASE DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4105.
5. THE PEDESTAL SHALL BE FURNISHED AND INSTALLED WITH A POLE SHAFT THAT HAS A COMBINED TAPERED-STRAIGHT CROSS-SECTIONAL DESIGN AND A ONE-PIECE CONSTRUCTION WITH NO LONGITUDINAL OR CIRCUMFERENTIAL WELDS EXCEPT FOR THE WELD NEEDED TO ATTACH THE POLE BASE. THE POLE SHAFT SHALL HAVE A ROUND CROSS-SECTIONAL DESIGN.
6. THE POLE BASE SHALL TELESCOPE THE POLE SHAFT. THE BASE SHALL BE WELDED TO THE POLE SHAFT BY 2 CIRCUMFERENTIAL WELDS: ONE ON THE OUTSIDE OF THE POLE AT THE BASE TOP AND ONE ON THE INSIDE OF THE BASE AT THE POLE BOTTOM.
7. 4 BOLT COVERS AND A POLE CAP SHALL BE FURNISHED AND INSTALLED WITH EACH PEDESTAL. THE POLE BASE PLATE SHALL BE LARGE ENOUGH TO FIT OVER ALL OF THE T-BASE TOP OPENINGS. USING AN ALUMINUM FILLER PLATE ON TOP OF THE T-BASE TO COVER ANY OPENING IS ACCEPTABLE. THE FILLER PLATE SHALL BE MANUFACTURED TO FIT THE T-BASE TOP EXACTLY AND BE AT LEAST 1/8 INCH THICK AND MADE FROM 5052-H32 ALLOY. BOTH SIDES AND THE EDGES OF THE FILLER PLATE SHALL BE COATED TO MATCH THE POLE AND T-BASE..
8. FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4163.
9. FOR PEDESTRIAN PUSHBUTTON SIGN DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4230.

12.7' PEDESTAL & VEHICULAR SIGNAL HEAD MOUNTING STANDARD


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4102

8/10/2017

SHT 2 OF 2

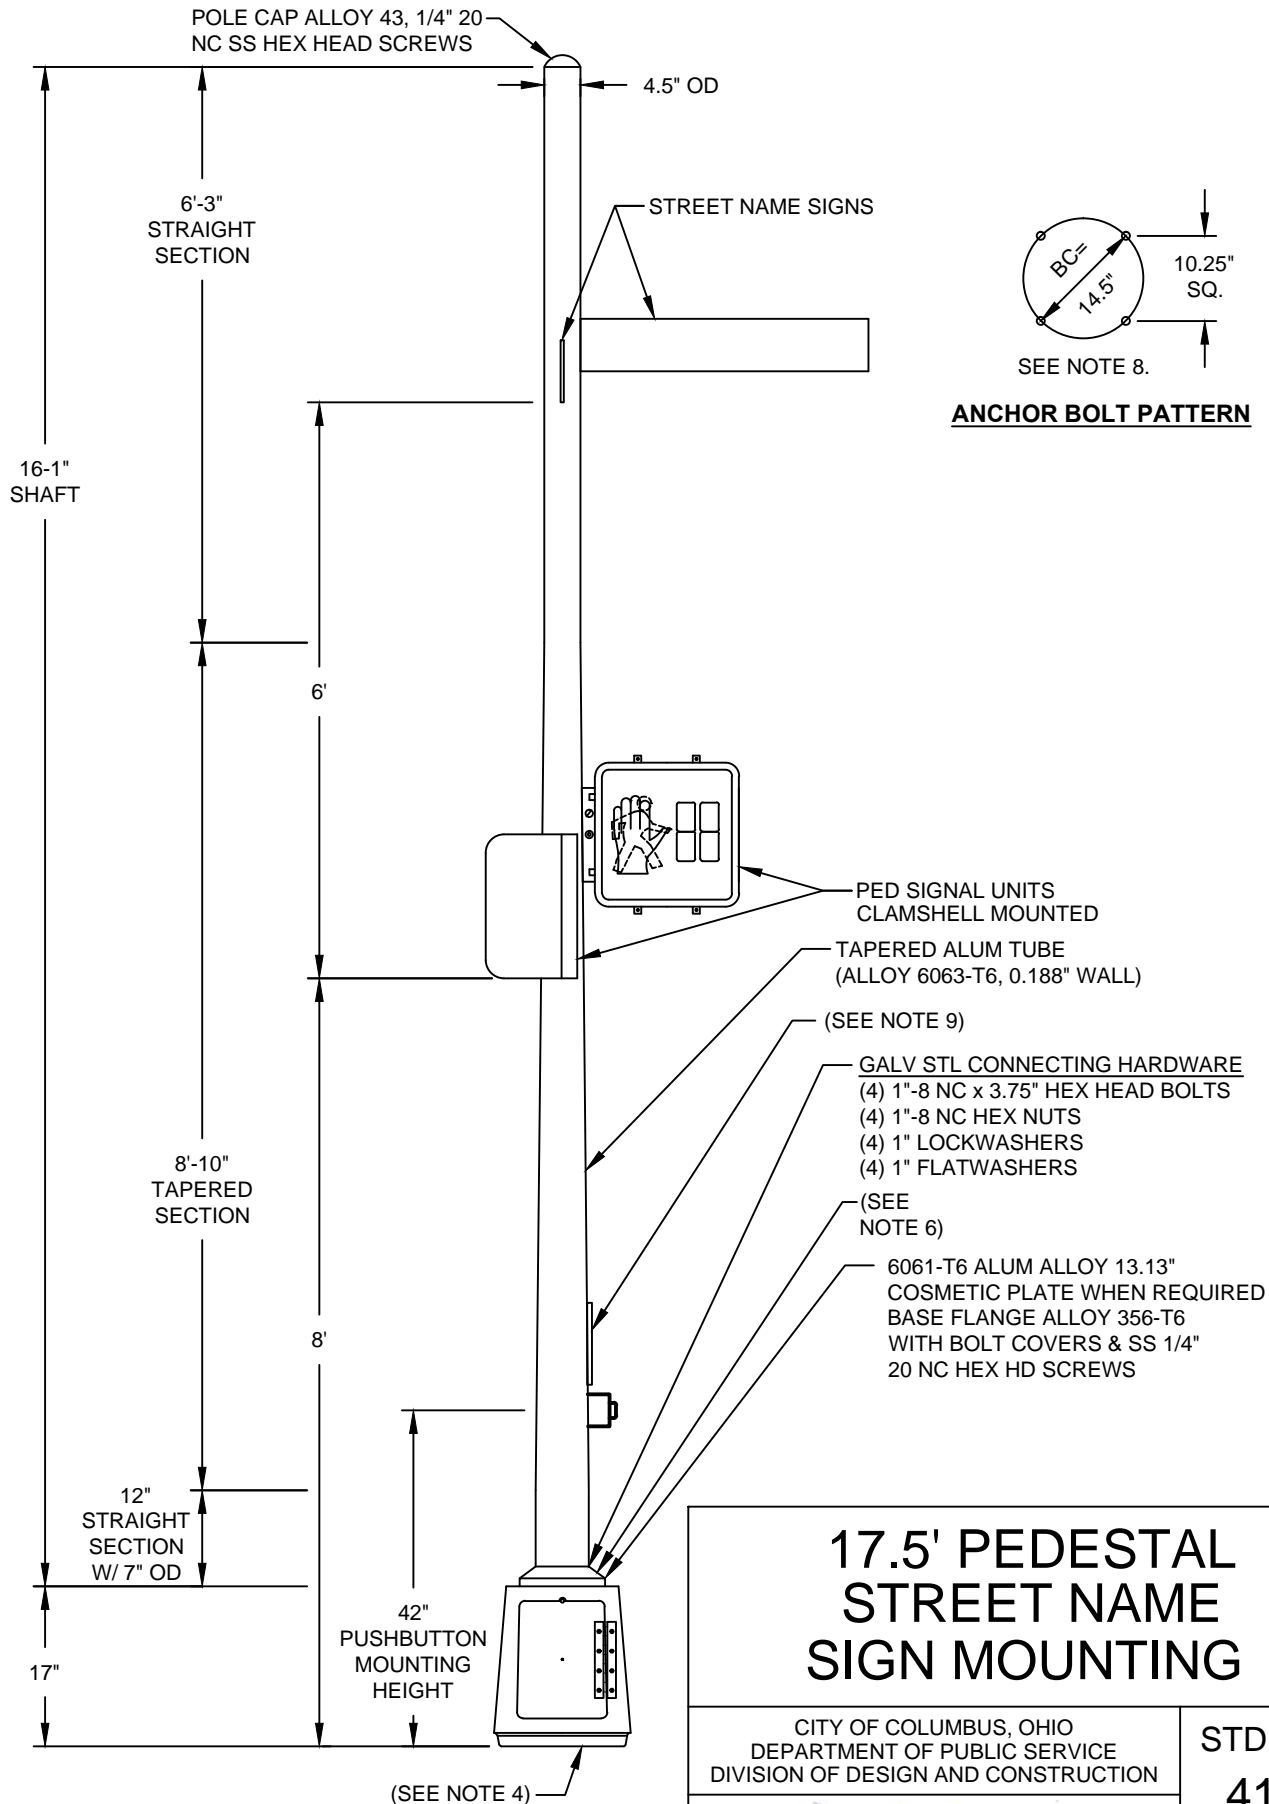

17.5' PEDESTAL STREET NAME SIGN MOUNTING

CITY OF COLUMBUS, OHIO
 DEPARTMENT OF PUBLIC SERVICE
 DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
 4103

CITY ENGINEER

10/01/2018

SHT 1 OF 2

NOTES:

1. PEDESTAL SUPPORTS SHALL BE COATED IN ACCORDANCE WITH THE PLAN.
2. PEDESTAL SUPPORTS SHALL BE DESIGNED FOR 90 MPH WINDS, APPROPRIATE GUST FACTOR AND LOADING AS PER PLAN.
3. 4 ANCHOR BOLTS SHALL BE INCLUDED WITH NUTS, LOCK WASHERS AND EIGHT (8) SHIMS.
4. A 17" TRANSFORMER BASE (ALSO KNOWN AS T-BASE) AND ALL CONNECTING HARDWARE SHALL BE FURNISHED WITH EACH PEDESTAL. FOR TRANSFORMER BASE DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4105.
5. THE PEDESTAL SHALL BE FURNISHED AND INSTALLED WITH A POLE SHAFT THAT HAS A COMBINED TAPERED-STRAIGHT CROSS-SECTIONAL DESIGN AND A ONE-PIECE CONSTRUCTION WITH NO LONGITUDINAL OR CIRCUMFERENTIAL WELDS EXCEPT FOR THE WELD NEEDED TO ATTACH THE POLE BASE. THE POLE SHAFT SHALL HAVE A ROUND CROSS-SECTIONAL DESIGN.
6. THE POLE BASE SHALL TELESCOPE THE POLE SHAFT. THE BASE SHALL BE WELDED TO THE POLE SHAFT BY 2 CIRCUMFERENTIAL WELDS: ONE ON THE OUTSIDE OF THE POLE AT THE BASE TOP AND ONE ON THE INSIDE OF THE BASE AT THE POLE BOTTOM.
7. 4 BOLT COVERS AND A POLE CAP SHALL BE FURNISHED AND INSTALLED WITH EACH PEDESTAL. THE POLE BASE PLATE SHALL BE LARGE ENOUGH TO FIT OVER ALL OF THE T-BASE TOP OPENINGS. USING AN ALUMINUM FILLER PLATE ON TOP OF THE T-BASE TO COVER ANY OPENING IS ACCEPTABLE. THE FILLER PLATE SHALL BE MANUFACTURED TO FIT THE T-BASE TOP EXACTLY AND BE AT LEAST 1/8" THICK AND MADE FROM 5052-H32 ALLOY. BOTH SIDES AND THE EDGES OF THE FILLER PLATE SHALL BE COATED TO MATCH THE POLE AND T-BASE.
8. FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD DRAWING 4163.
9. FOR PEDESTRIAN PUSHBUTTON SIGN DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4230.

17.5' PEDESTAL STREET NAME SIGN MOUNTING


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4103


CITY ENGINEER

10/01/2018

SHT 2 OF 2

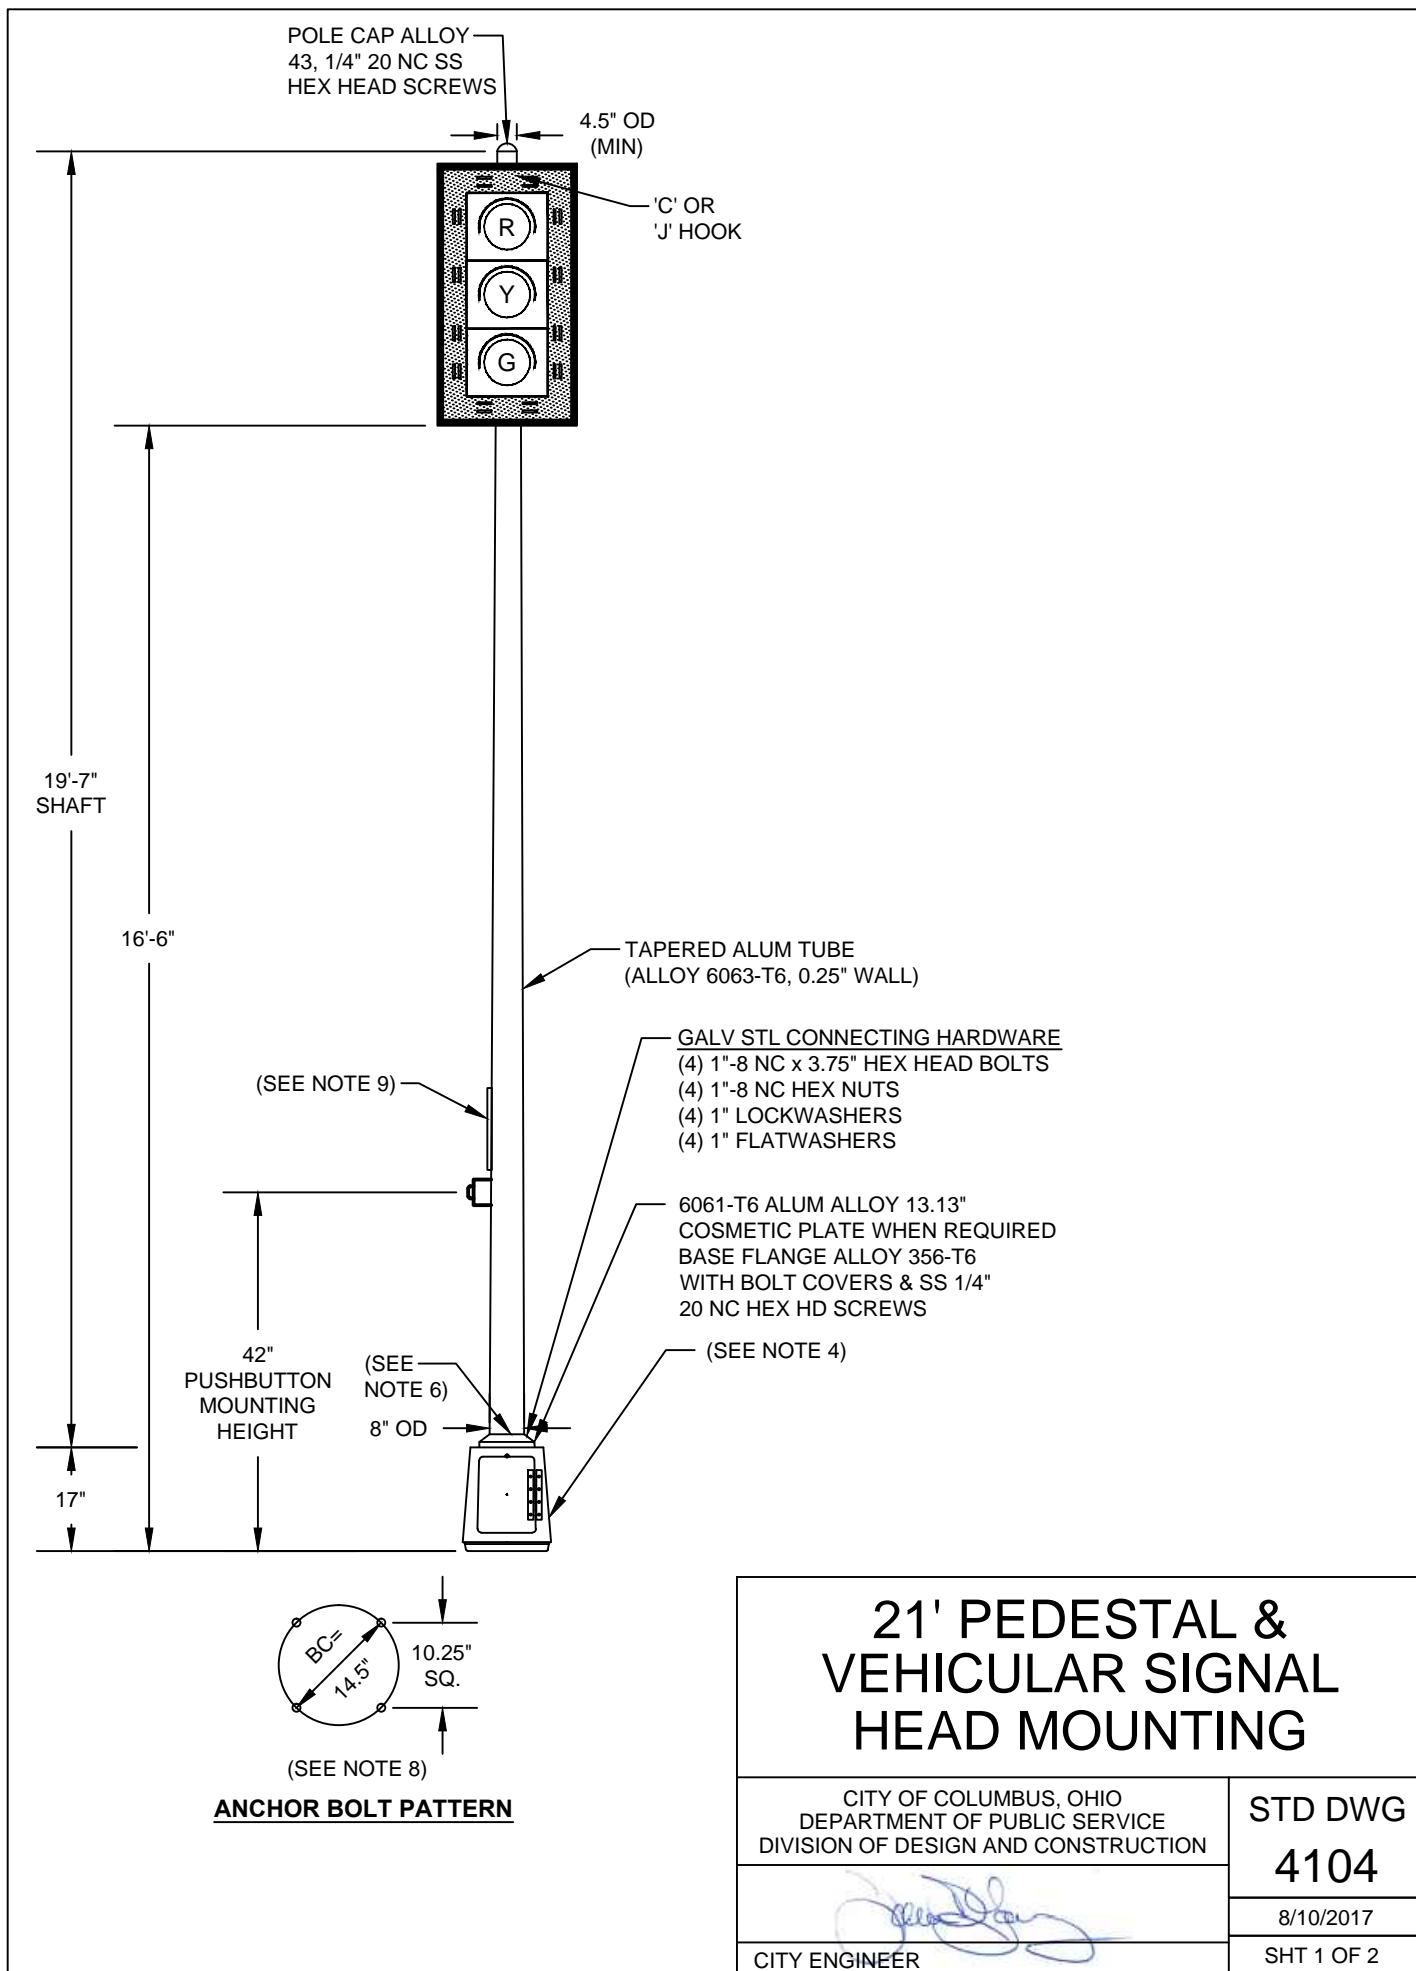

21' PEDESTAL & VEHICULAR SIGNAL HEAD MOUNTING

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

4104

8/10/2017

CITY ENGINEER

SHT 1 OF 2

NOTES:

1. PEDESTAL SUPPORTS SHALL BE COATED IN ACCORDANCE WITH THE PLANS.
2. PEDESTAL SUPPORTS SHALL BE DESIGNED FOR 90 MPH WINDS, APPROPRIATE GUST FACTOR AND LOADING AS PER PLAN.
3. 4 ANCHOR BOLTS SHALL BE INCLUDED WITH NUTS, LOCK WASHERS AND EIGHT (8) SHIMS.
4. A 17" TRANSFORMER BASE (ALSO KNOWN AS T-BASE) AND ALL CONNECTING HARDWARE SHALL BE FURNISHED WITH EACH PEDESTAL. FOR TRANSFORMER BASE DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4105.
5. THE PEDESTAL SHALL BE FURNISHED AND INSTALLED WITH A POLE SHAFT THAT HAS A TAPERED CROSS-SECTIONAL DESIGN AND A ONE-PIECE CONSTRUCTION WITH NO LONGITUDINAL OR CIRCUMFERENTIAL WELDS EXCEPT FOR THE WELD NEEDED TO ATTACH THE POLE BASE. THE POLE SHAFT SHALL HAVE A ROUND CROSS-SECTIONAL DESIGN.
6. THE POLE BASE SHALL TELESCOPE THE POLE SHAFT. THE BASE SHALL BE WELDED TO THE POLE SHAFT BY 2 CIRCUMFERENTIAL WELDS: ONE ON THE OUTSIDE OF THE POLE AT THE BASE TOP AND ONE ON THE INSIDE OF THE BASE AT THE POLE BOTTOM.
7. 4 BOLT COVERS AND A POLE CAP SHALL BE FURNISHED AND INSTALLED WITH EACH PEDESTAL. THE POLE BASE PLATE SHALL BE LARGE ENOUGH TO FIT OVER ALL OF THE T-BASE TOP OPENINGS. USING AN ALUMINUM FILLER PLATE ON TOP OF THE T-BASE TO COVER ANY OPENING IS ACCEPTABLE. THE FILLER PLATE SHALL BE MANUFACTURED TO FIT THE T-BASE TOP EXACTLY AND BE AT LEAST 1/8 INCH THICK AND MADE FROM 5052-H32 ALLOY. BOTH SIDES AND THE EDGES OF THE FILLER PLATE SHALL BE COATED TO MATCH THE POLE AND T-BASE.
8. FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD DRAWING 4163.
9. FOR PEDESTRIAN PUSHBUTTON SIGN DETAILS SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4230.

21' PEDESTAL & VEHICULAR SIGNAL HEAD MOUNTING

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


CITY ENGINEER

STD DWG

4104

8/10/2017

SHT 2 OF 2

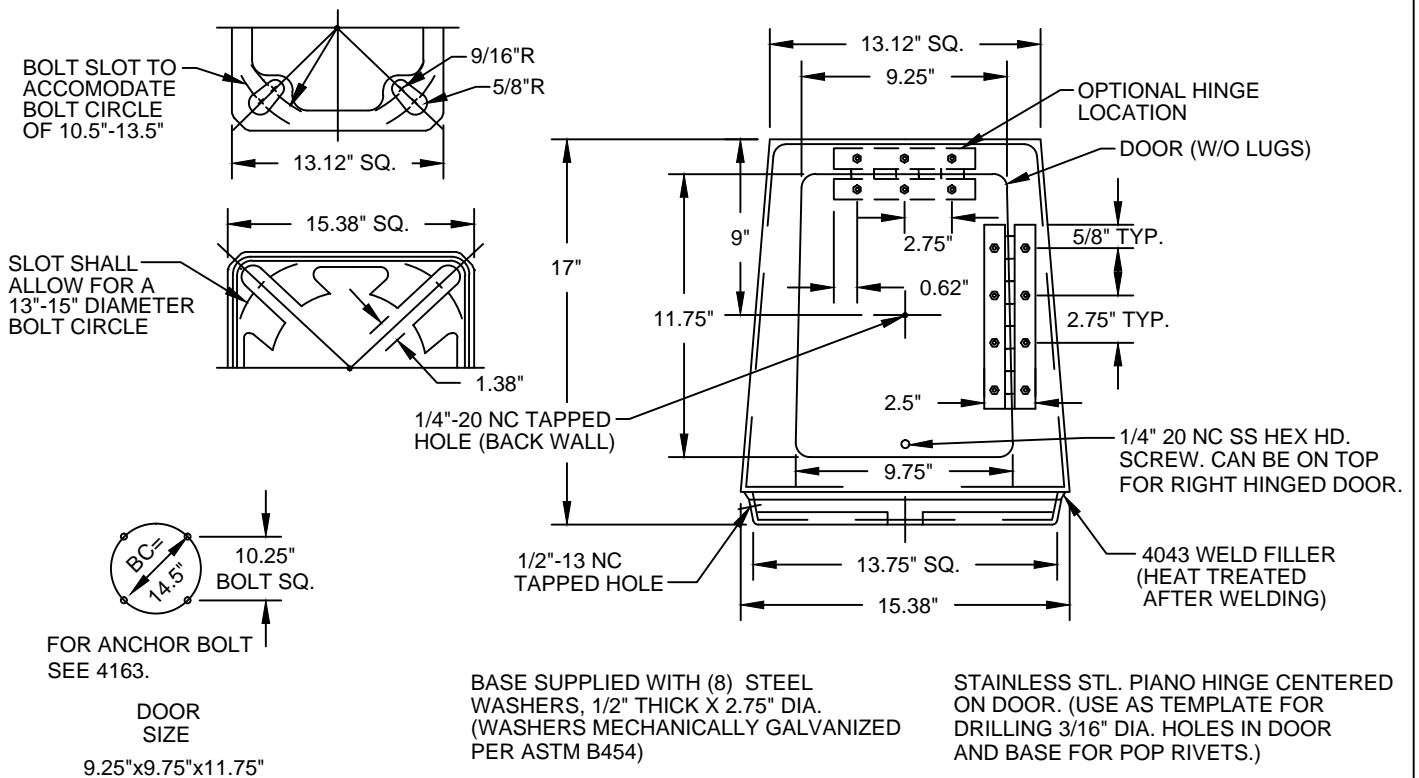

ALUMINUM TRANSFORMER BASE

SHAFT SIZE	BASE HEIGHT	TOP SQUARE	BOTTOM SQUARE	TOP BOLT CIRCLE	BOTTOM BOLT CIRCLE
7" & 8"	17"	13.12"	15.38"	10.5"-13.5"	14.5"

NOTES:

A 13.75" SQUARE BOTTOM SECTION CAN BE WELDED TO THE TRANSFORMER BASE TO PROVIDE A 13" TO 15" BOLT CIRCLE.

TRANSFORMER BASE SHALL BE SUPPLIED WITH A TOP OR RIGHT SIDE HINGED DOOR, SCREW AND 1/2" THICK x 2.75" OD GALVANIZED WASHERS.

CONNECTING HARDWARE TO ATTACH SHAFT BASE TO TRANSFORMER BASE SHALL BE SUPPLIED.

TRANSFORMER BASE SHALL ACCEPT 3/4" & 1" DIAMETER ANCHOR BOLTS.

TRANSFORMER BASE SHALL BE COATED IN ACCORDANCE WITH THE PLANS.

FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD DRAWING 4163.

TRANSFORMER BASE



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4105

8/10/2017

CITY ENGINEER

SHT 1 OF 1

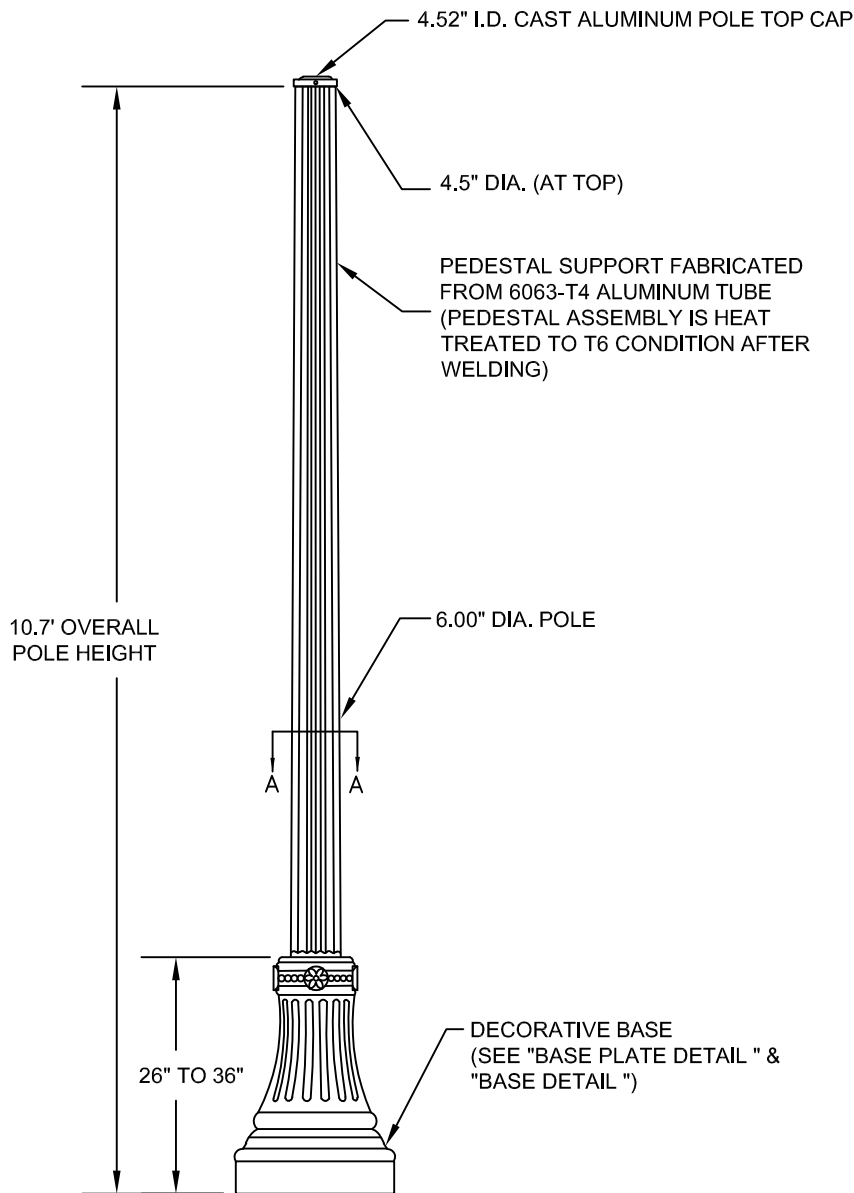

SECTION A-A

10.7 ' DECORATIVE PEDESTAL


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4106

07/01/2020

CITY ENGINEER

SHT 1 OF 2

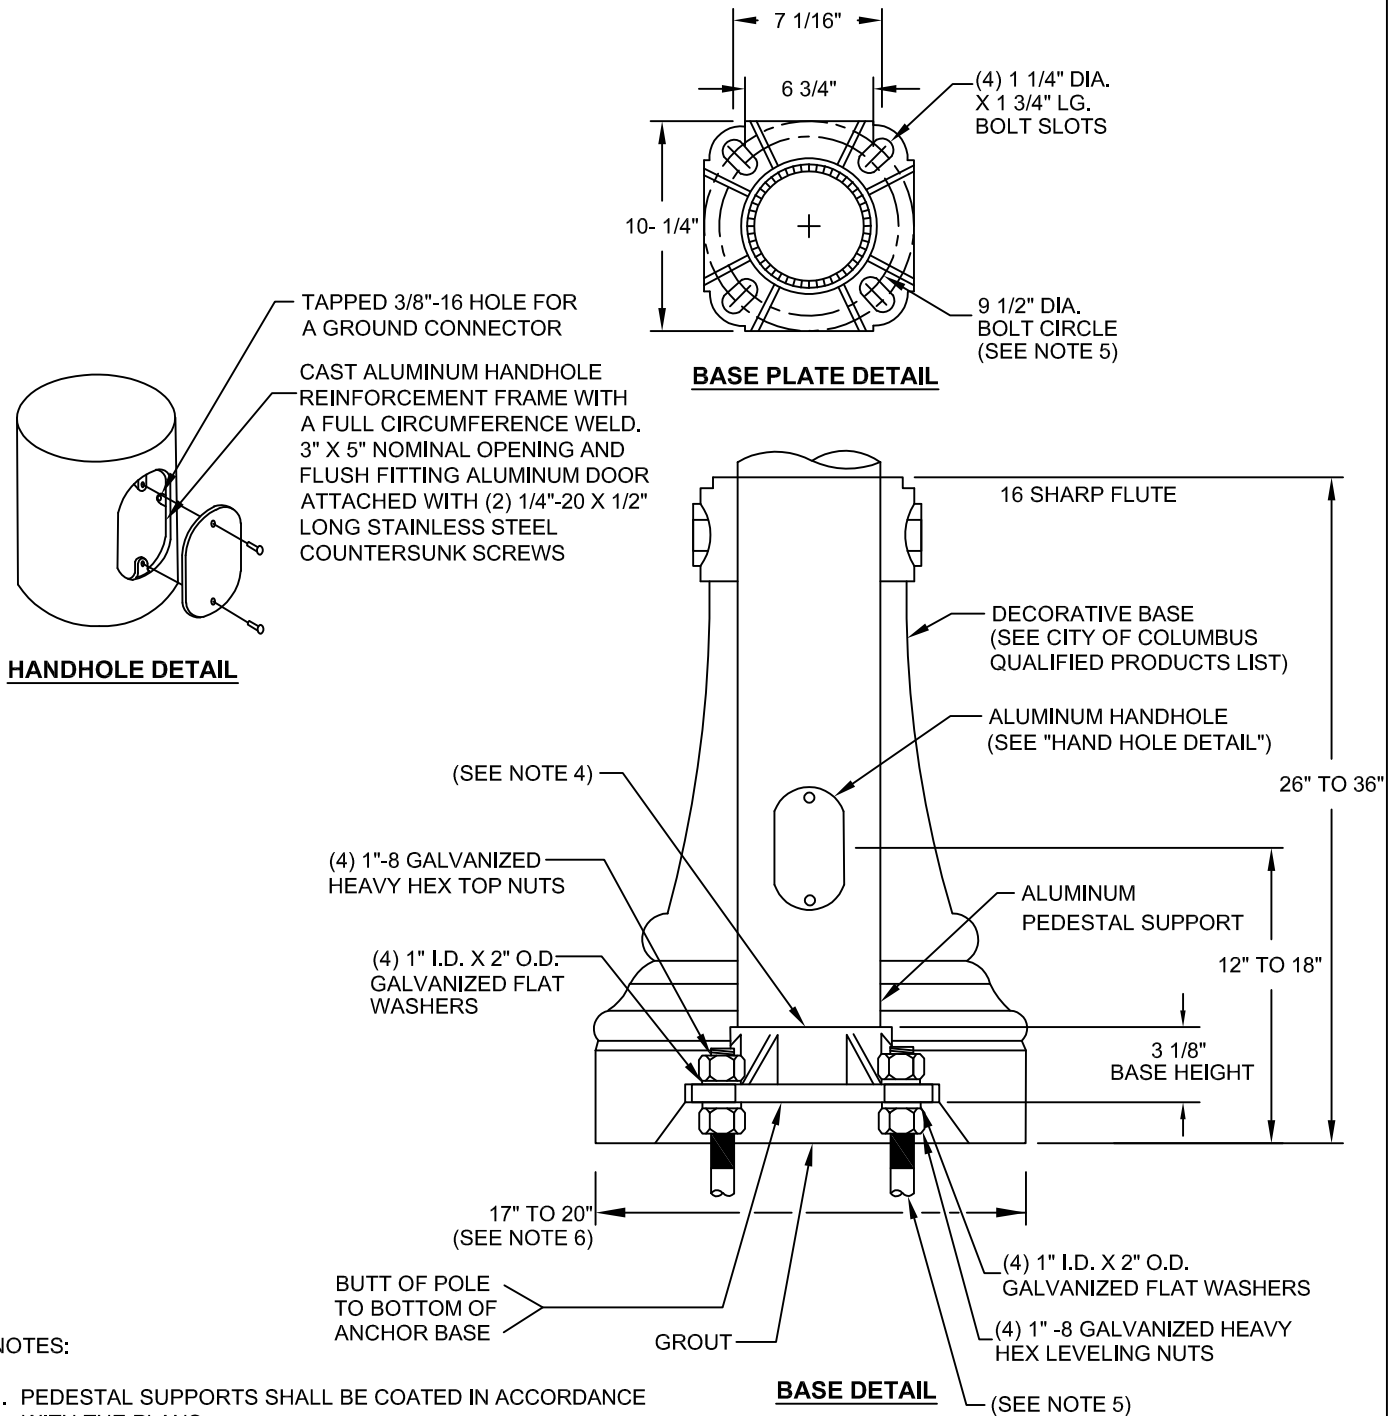

NOTES:

1. PEDESTAL SUPPORTS SHALL BE COATED IN ACCORDANCE WITH THE PLANS.
2. PEDESTAL SUPPORTS SHALL BE DESIGNED FOR 90 MPH WINDS, APPROPRIATE GUST FACTOR AND LOADING AS PER PLAN.
3. FOUR ANCHOR BOLTS SHALL BE INCLUDED WITH NUTS, LOCK WASHERS AND EIGHT (8) SHIMS.
4. THE POLE BASE SHALL TELESCOPE THE POLE SHAFT. THE BASE SHALL BE WELDED TO THE POLE SHAFT BY TWO CIRCUMFERENTIAL WELDS: ONE ON THE OUTSIDE OF THE POLE AT THE BASE TOP AND ONE ON THE INSIDE OF THE BASE AT THE POLE BOTTOM.
5. FOR FOUNDATION DETAILS SEE CITY OF COLUMBUS STANDARD DRAWING 4163.
6. A 17" DECORATIVE BASE SHALL BE USED FOR FOUNDATIONS WITH AN 18" SQUARE FORMED TOP.

10.7' DECORATIVE PEDESTAL


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4106

07/01/2020

SHT 2 OF 2


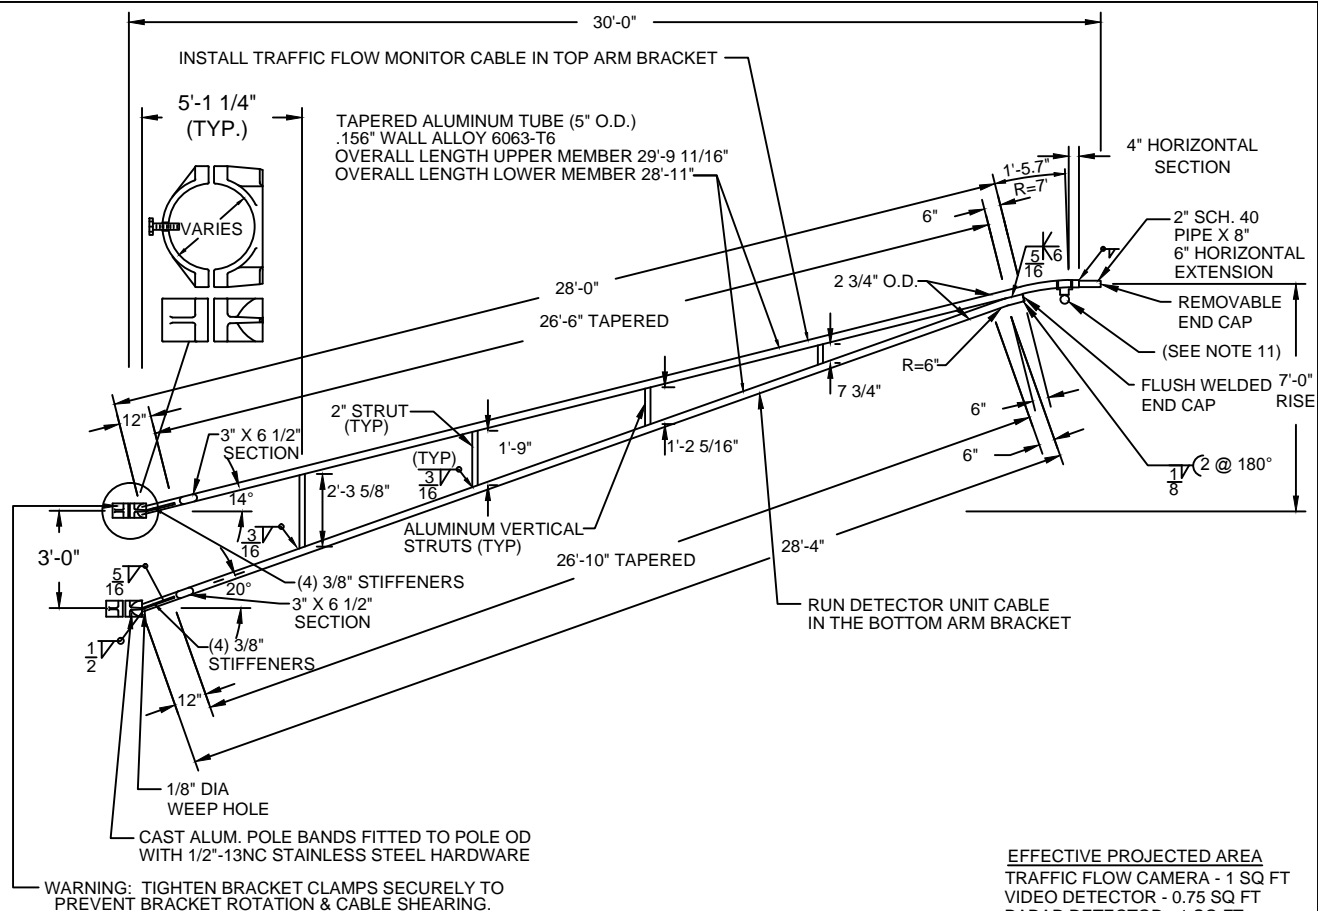


EFFECTIVE PROJECTED AREA
TRAFFIC FLOW CAMERA - 1 SQ FT
VIDEO DETECTOR - 0.75 SQ FT
RADAR DETECTOR - 1 SQ FT

WEIGHT IN POUNDS
TRAFFIC FLOW CAMERA - 20
VIDEO DETECTOR - 8
RADAR DETECTOR - 7


SAFETY FACTOR > 1.6

LOADING FACTORS

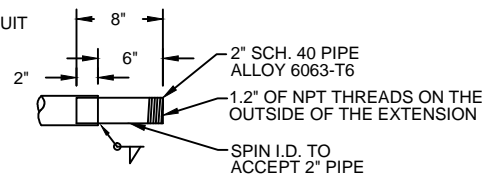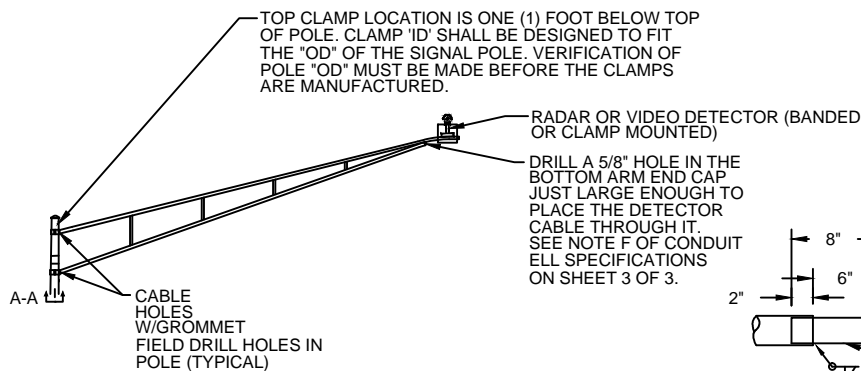

HORIZONTAL SLIPFITTER

PROVIDE THREADED END CAP WHEN HORIZONTAL SLIPFITTER IS NOT USED. CAP SHALL BE COATED TO MATCH ARM AND POLE.

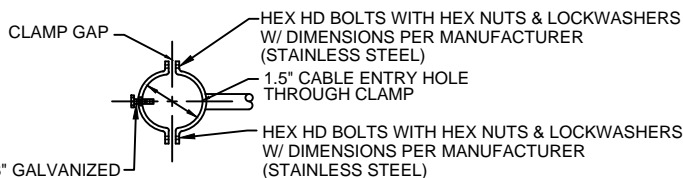

(2)-5/8" GALVANIZED ANTI-ROTATION BOLTS, EACH FIELD DRILLED INTO POLE (ONE FOR EACH BRACKET CLAMP) ANTI-ROTATION BOLT SHALL NOT PROTRUDE MORE THAN 1/2" INTO SIGNAL SUPPORT.

VERIFY UPPER & LOWER ID DIMENSIONS. CLAMP SHALL BE SIZED TO ACCOMMODATE POLE OD.

VIEW A-A

30' - 0" BRACKET ARM

DETECTOR UNIT / TRAFFIC FLOW MONITOR BRACKET ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


STD DWG

4110

10/01/2018

SHT 1 OF 3

CITY ENGINEER


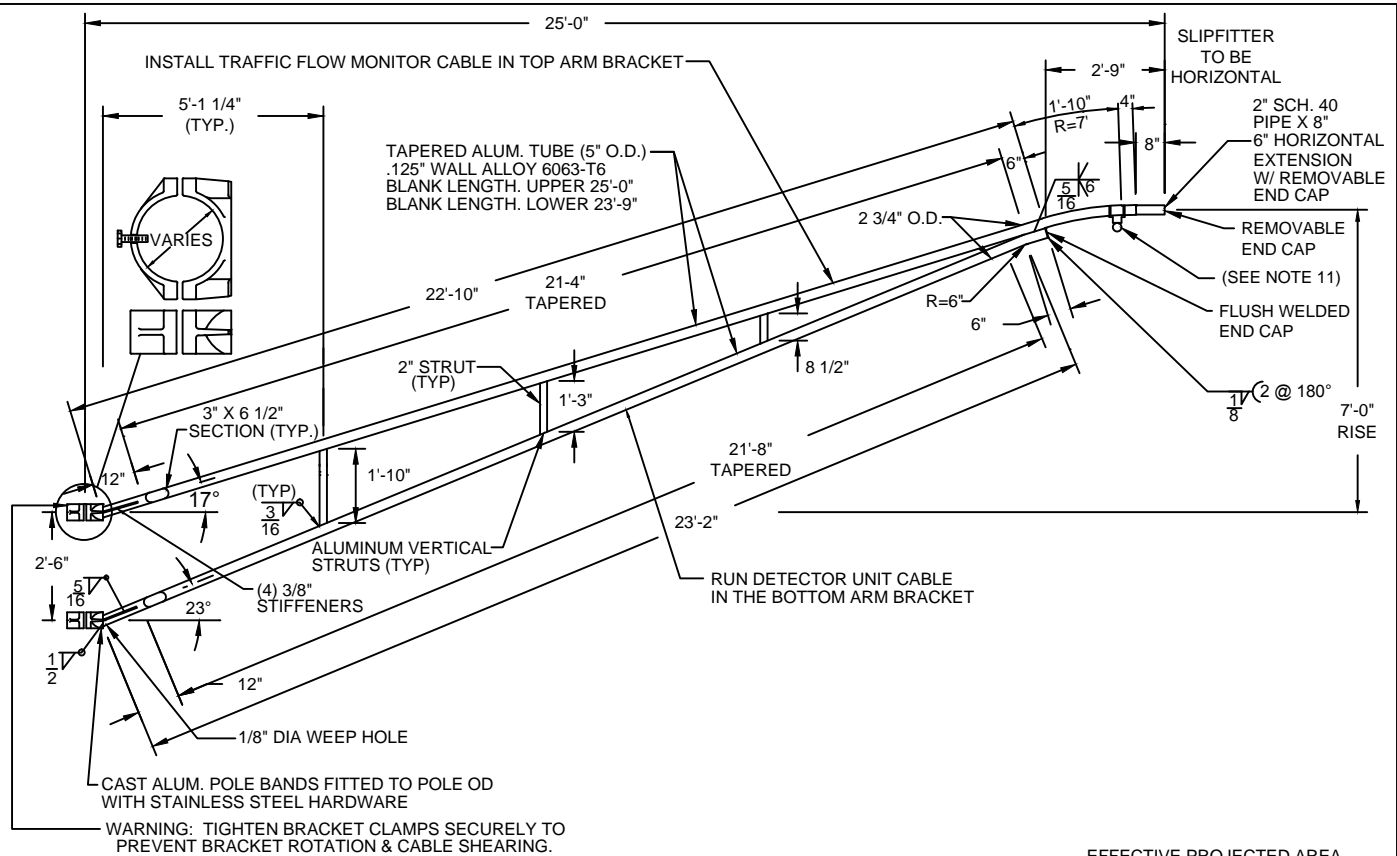


EFFECTIVE PROJECTED AREA
 TRAFFIC FLOW CAMERA - 1 SQ FT
 VIDEO DETECTOR - 0.75 SQ FT
 RADAR DETECTOR - 1 SQ FT

WEIGHT IN POUNDS
 TRAFFIC FLOW CAMERA - 20
 VIDEO DETECTOR - 8
 RADAR DETECTOR - 7


SAFETY FACTOR > 1.6

LOADING FACTORS

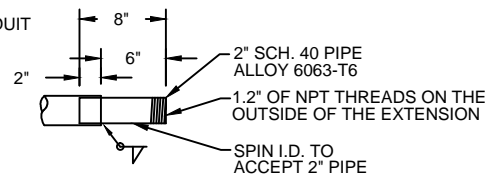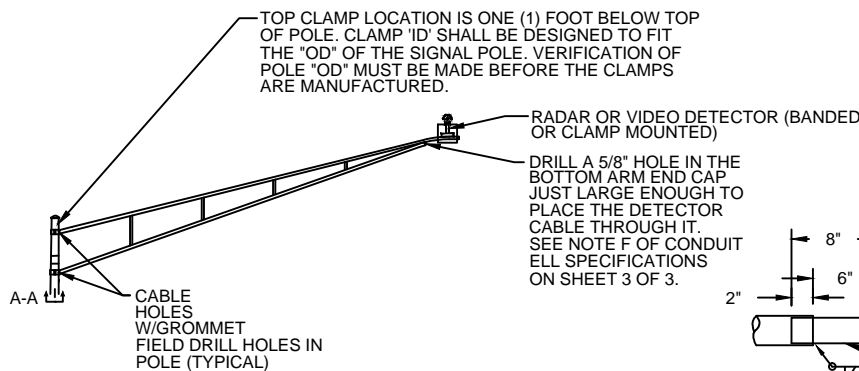

HORIZONTAL SLIPFITTER

PROVIDE THREADED END CAP WHEN HORIZONTAL SLIPFITTER IS NOT USED. CAP SHALL BE COATED TO MATCH ARM AND POLE.

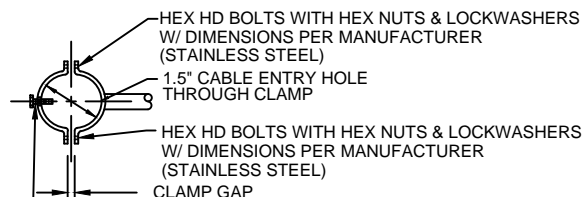

(2)-5/8" GALVANIZED ANTI-ROTATION BOLTS, EACH FIELD DRILLED INTO POLE (ONE FOR EACH BRACKET CLAMP) ANTI-ROTATION BOLT SHALL NOT PROTRUDE MORE THAN 1/2" INTO SIGNAL SUPPORT.

VERIFY UPPER & LOWER ID DIMENSIONS. CLAMP SHALL BE SIZED TO ACCOMMODATE POLE OD.

VIEW A-A

25' - 0" BRACKET ARM

DETECTOR UNIT / TRAFFIC FLOW MONITOR BRACKET ARM

CITY OF COLUMBUS, OHIO
 DEPARTMENT OF PUBLIC SERVICE
 DIVISION OF DESIGN AND CONSTRUCTION

STD DWG


4110

10/01/2018

SHT 2 OF 3

CITY ENGINEER

INSTALL THE TRAFFIC FLOW MONITOR CABLE IN THE TOP ARM BRACKET.
INSTALL THE DETECTOR CABLE IN THE BOTTOM ARM BRACKET.

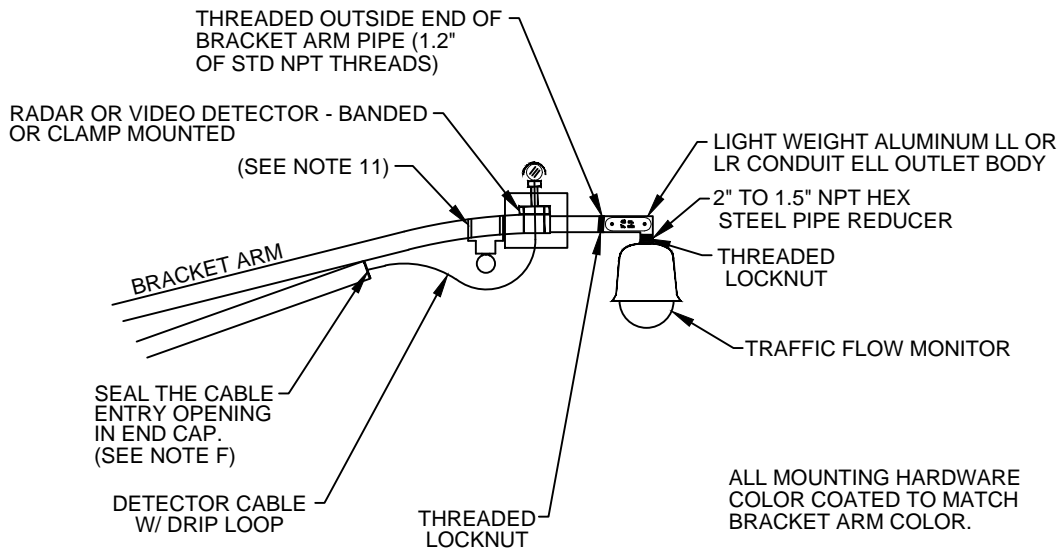

- A) THREADED BODY (NPT) WITH NON-CORROSIVE HARDWARE
- B) 48 CU. IN. INTERIOR AREA
- C) FLAT COVER WITH SOLID NEOPRENE GASKET
- D) COVER OPENING - 6" X 2.4"
- E) LIGHT WEIGHT ALUMINUM BODY
- F) PROVIDE #10 RUBBER STOPPER WITH A HOLE AND SLOT FOR OUTGOING CABLE;
ENLARGE STOPPER HOLE AS NEEDED JUST ENOUGH TO FIT CABLE DIAMETER

LL/LR CONDUIT ELL SPECS

NOTES:

1. BRACKET ARMS SHALL BE INSTALLED PARALLEL OR PERPENDICULAR TO THE ROAD CENTERLINE AS PER PLAN.
2. ALL CABLES SHALL BE RUN INSIDE A BRACKET TUBE. ENTRY HOLES INTO THE SIGNAL POLE SHALL BE FIELD DRILLED.
3. BRACKET ARM, VIDEO DETECTOR AND/OR TRAFFIC FLOW MONITOR DOME SHALL BE COLOR COATED AS PER PLAN.
4. HEAT TREAT AFTER WELDING.
5. BRACKET ARMS SHALL BE COATED IN ACCORDANCE WITH THE PLANS TO MATCH THE SIGNAL SUPPORT OR STRAIN POLE STRUCTURE.
6. A TRUSS-STYLE DESIGN SHALL BE USED AND SHALL BE CAPABLE OF SUPPORTING A LUMINAIRE WEIGHING 75 POUNDS AND HAVING AN EFFECTIVE PROJECTED AREA OF 1.6 SQUARE FEET AND OR TRAFFIC DETECTOR AND/OR TRAFFIC FLOW MONITOR.
7. BRACKET ARMS SHALL BE DESIGNED FOR A 90 MPH WIND LOADING WITH APPROPRIATE GUST FACTOR.
8. THE CLAMP MOUNTED ARM SHALL COME WITH BOTH CLAMPS AND MOUNTING HARDWARE.
9. BRACKET ARMS SHALL BE DESIGNED TO FIT A MASTARM POLE SHAFT THAT HAS A NOMINAL TAPER OF 0.14 INCH PER FOOT AND A BOTTOM-OF-POLE OUTSIDE DIAMETER AS PER PLAN.
10. DETAILS AND DIMENSIONS ILLUSTRATED ON THESE DRAWINGS ILLUSTRATE AN ALUMINUM TRUSS ONLY. ALL STRUCTURAL COMPONENTS REMAIN THE RESPONSIBILITY OF THE MANUFACTURER.
11. FOR MECHANICAL DAMPENING DEVICE SEE STANDARD DRAWING 4122.

NOTES AND CONDUIT ELL SPECS

DETECTOR UNIT / TRAFFIC FLOW MONITOR BRACKET ARM


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


STD DWG
4110

CITY ENGINEER

10/01/2018

SHT 3 OF 3

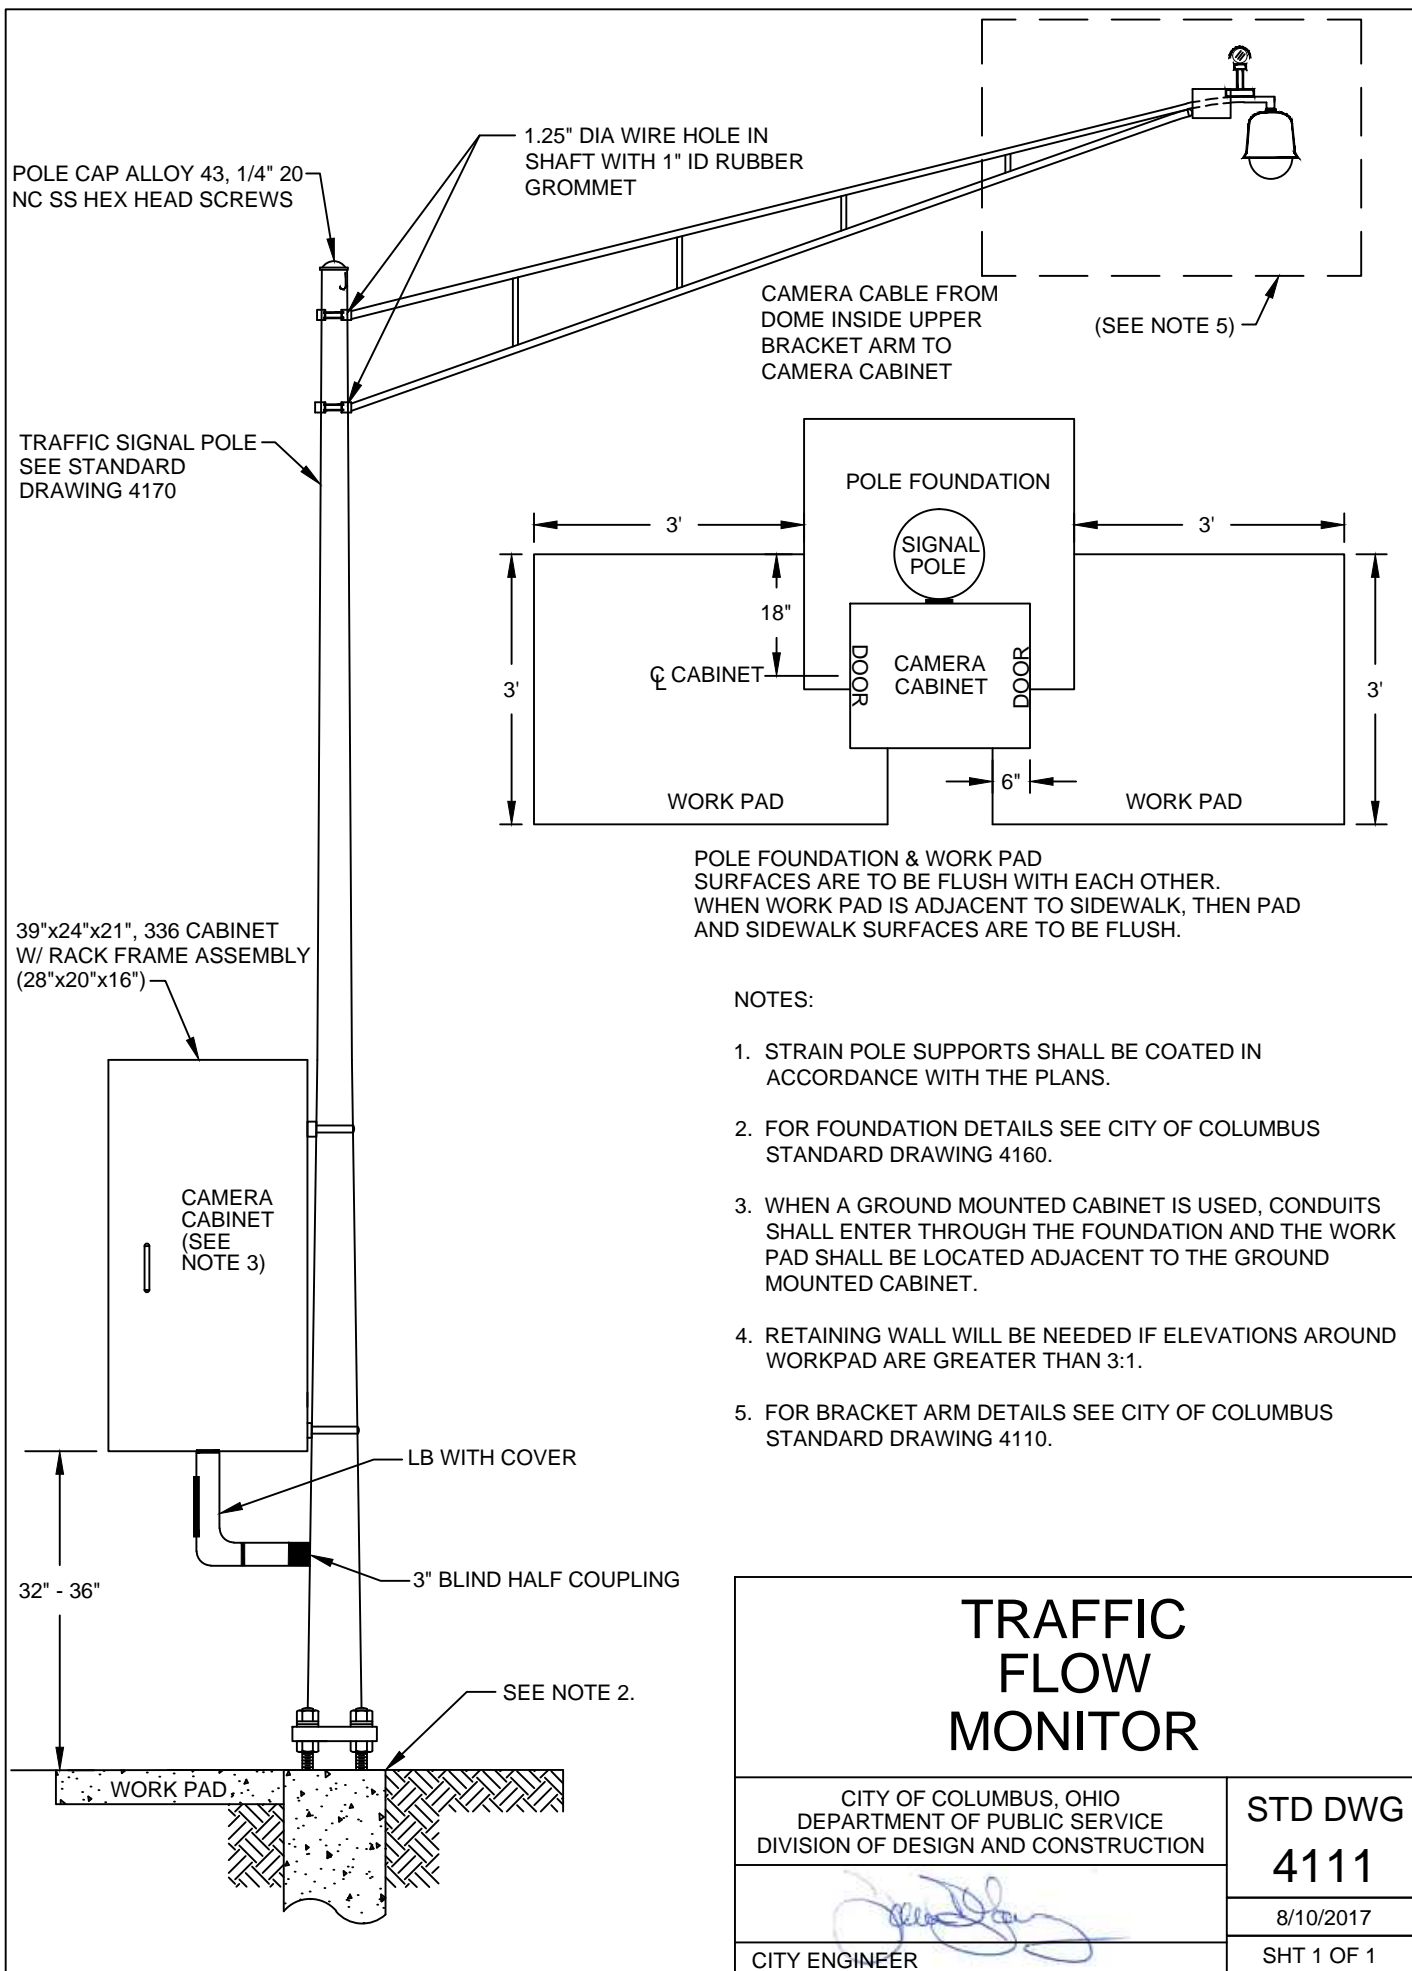

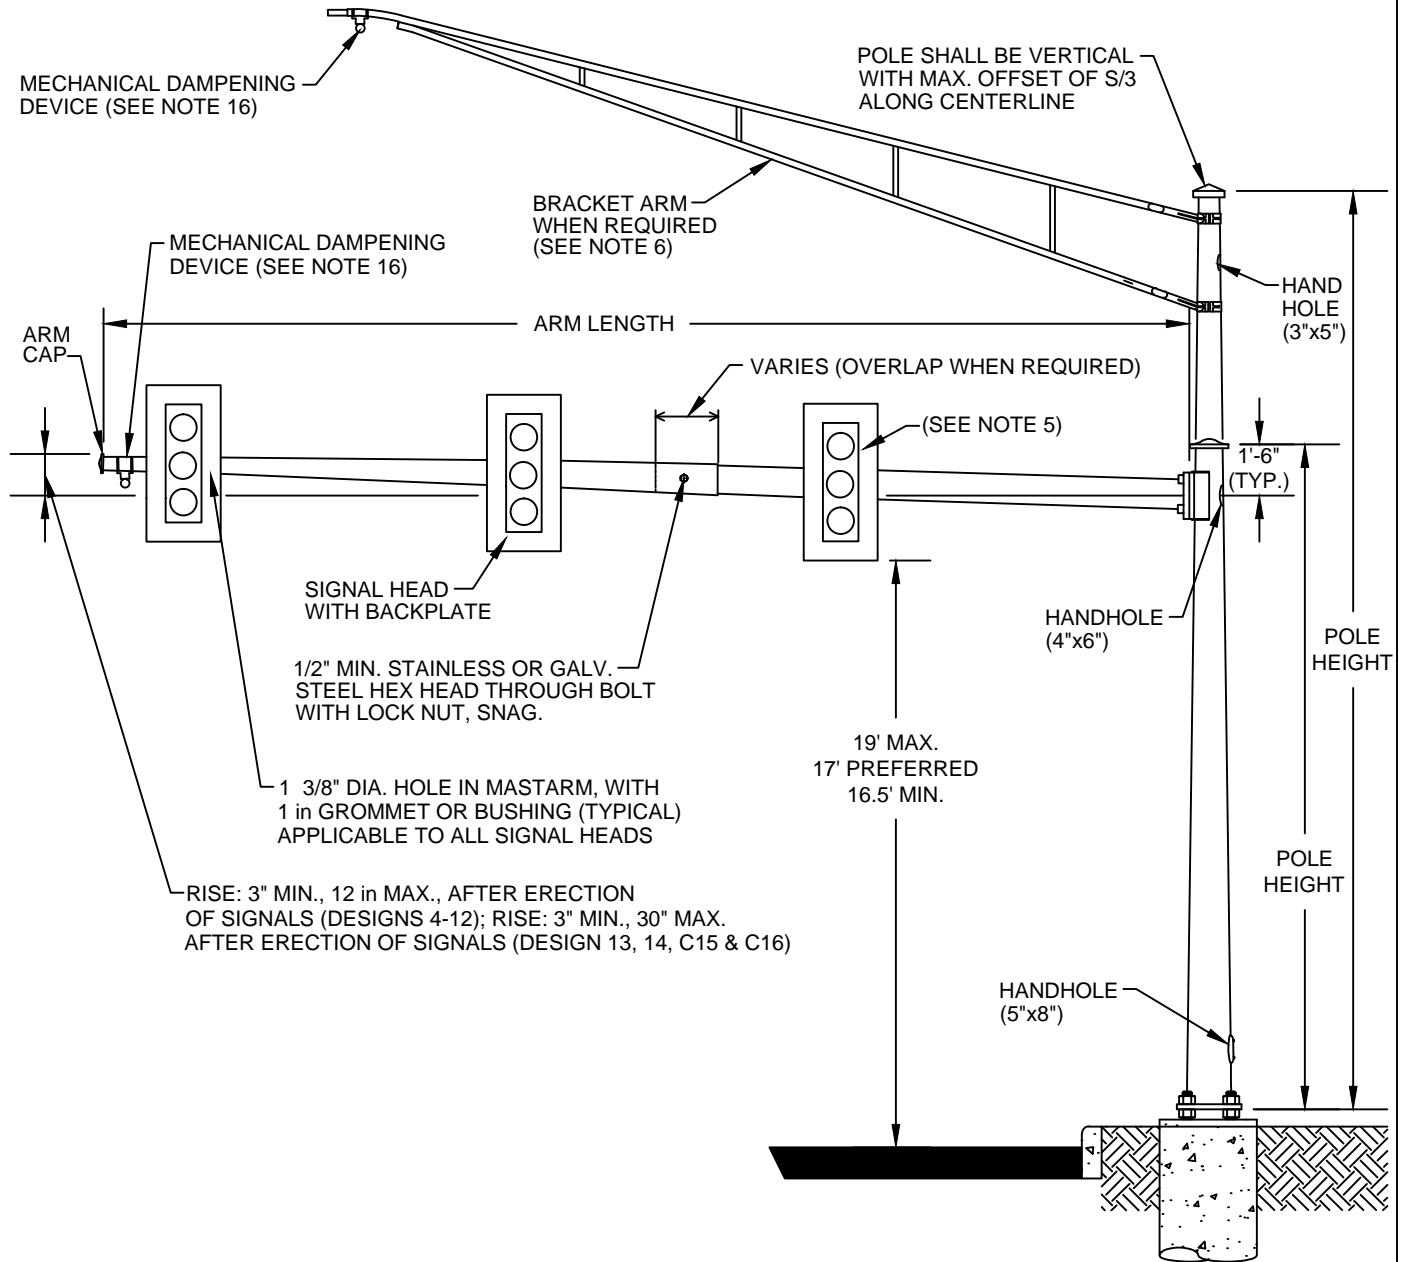

STANDARD CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4120

10/01/2018

CITY ENGINEER

SHT 1 OF 10

TABLE 1 - PART A - POLE DIMENSIONS

DESIGN NO.	MAXIMUM DESIGN AREA SQ FT (NOTE A)	DESIGN DISTANCE FROM CL FT	POLE			ARM			
			TYPE	WALL THICK	BASE DIAMETER	MAX LENGTH	TYPE	WALL THICK	SIZE
4	42	37.5	ROUND	.239	13	38'	ROUND	.239	10.32X5.00*
12	42	47.5	ROUND	.299	14	48'	ROUND	.299	11x8.62x17' +
								.179	9.19x4.68x32'-3"
13	40	59.5	ROUND	.299	16	60'	ROUND	.299	13x8.80x30' +
								.239	9.62x5.14x32'
14	38	69.5	ROUND	.299	17	70'	ROUND	.3125	14x9.1x35' +
								.239	9.90x4.42x37'
14	38	69.5	ROUND	.299	17	70'	ROUND	0.313	14x8.68x38' +
								0.250	9.50x4.74x34'
C15	50	78.5	ROUND	.313	18	79'	ROUND	.313	14.40x8.70x40.75' +
								.179	9.34x3.71x40.25'
C16 DOUBLE ARM	48 / 48	49.5 49.5	ROUND	.313	16	50'/50'	ROUND	.250	12.00x9.55x17.5' +
								.179	10.19x5.40x34.25'
								.250	12.00x9.55x17.5' +
								.179	10.19x5.40x34.25'

ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE NOTED. *=SINGLE PIECE ARM

TABLE 1 - PART B - POLE DIMENSIONS

DESIGN NO.	ARM ATTACHMENT								ANCHOR BASE					PLATE SKIRT	
	A	B	C	D	E	F	G	P	BOLT CIRCLE	S	J	T	H	M	K
4	16.50	14.50	12.50	9.50	1.50	2	1.25	0.25	18	18.50	12.75	2	2.13	6.75	7.75
12	16.50	14.50	12.50	9.50	1.75	2	1.50	0.31	20	20.50	14.13	2	2.38	7.5	8.5
13	19.50	16.50	15	12	1.50	2	1.50	0.31	22	23	15.56	2	2.38	7.5	8.5
14	19.50	16.50	15	12	2.00	2	2.00	0.38	22	23	15.56	2	2.38	7.5	8.5
C15	24	19	18	13	2.00	2	2.00	0.38	24	24	17	2	2.38	7.5	8.5
C16 DOUBLE ARM	19	15	14	10	1.75	2	1.50	0.31	22	23	15.56	2	2.38	7.5	8.5
	19	15	14	10	1.75	2	1.50	0.31							

ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE NOTED.

THESE DESIGNS USE FULL PENETRATION WELDS AT THE ARM AND BASE PLATE CONNECTIONS.

NOTES:

A. MAXIMUM DESIGN AREA IS BASED ON 90 MPH DESIGN WIND SPEED WITH A PRESSURE OF 25 PSF.

B. DIMENSION LOCATIONS ARE ILLUSTRATED ON SHEETS 3 & 6.

STANDARD CITY OF COLUMBUS MAST ARM


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG
4120

10/01/2018

SHT 2 OF 10

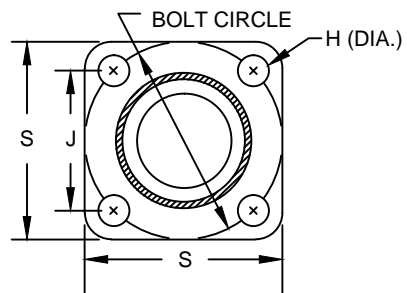


BASE PLATE

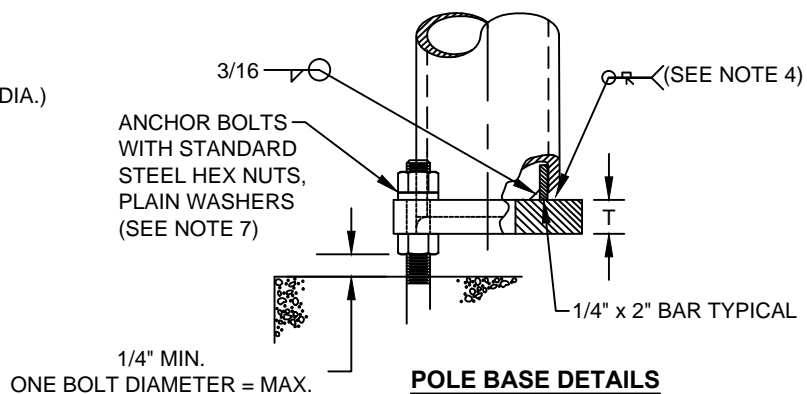

POLE BASE DETAILS

DESIGN 4, 12, 13, & 14

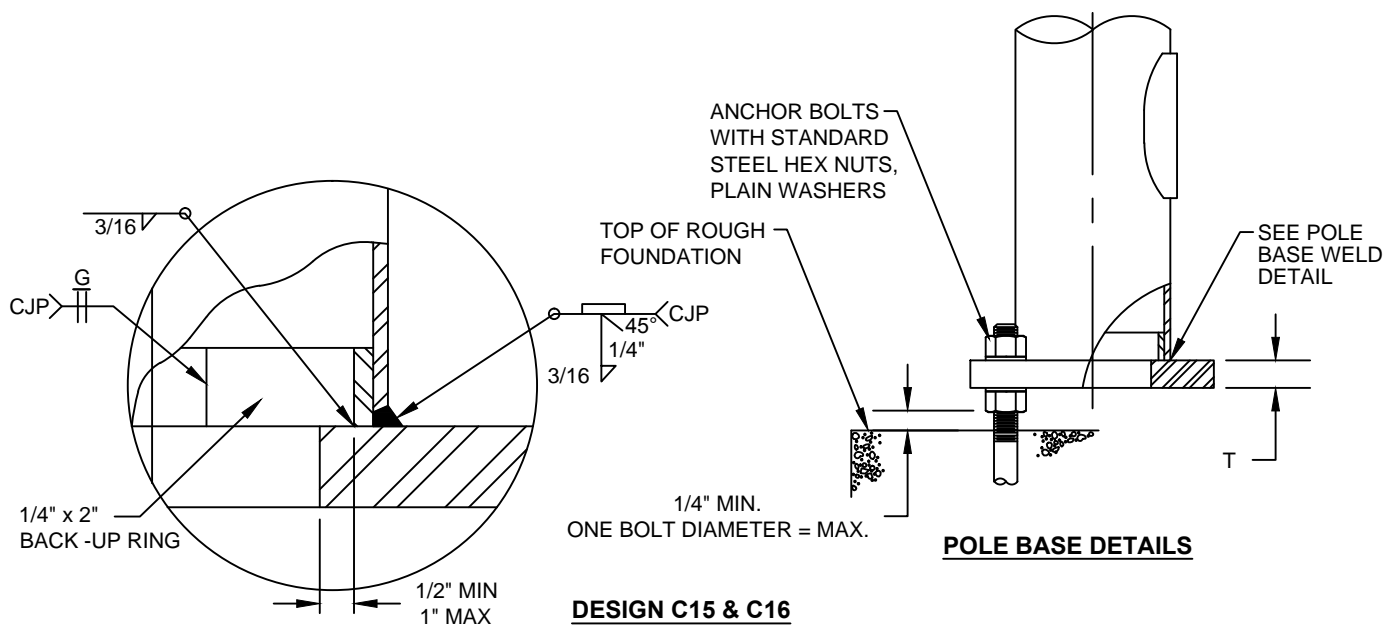

POLE BASE AND ARM FLANGE WELD DETAIL

POLE BASE DETAILS

DESIGN C15 & C16

BASE CONNECTION

STANDARD CITY OF COLUMBUS MAST ARM




CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4120**

CITY ENGINEER

10/01/2018

SHT 3 OF 10

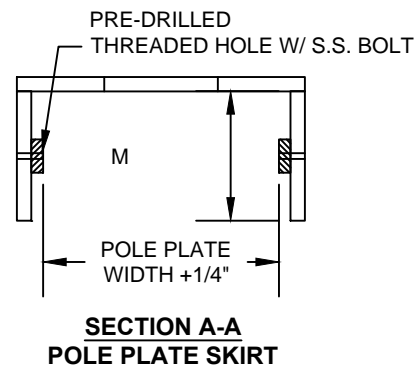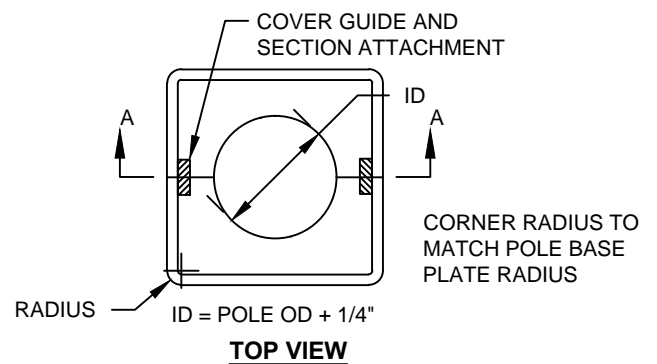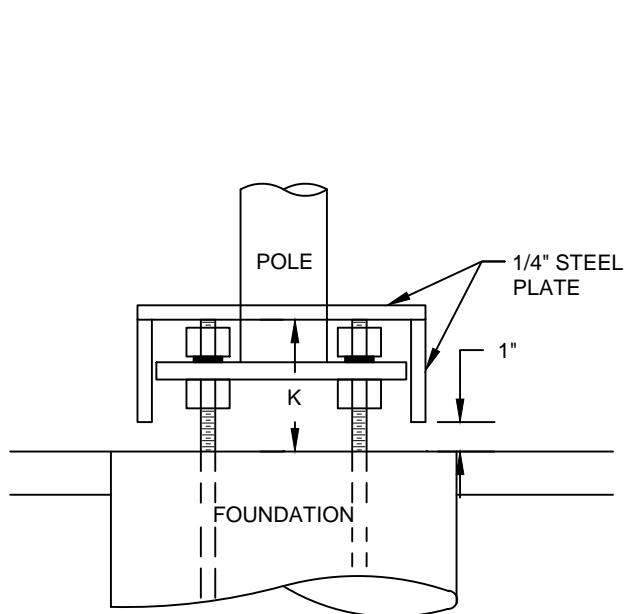

STEEL BASE COVER

STANDARD CITY OF COLUMBUS MAST ARM


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4120



10/01/2018

CITY ENGINEER


SHT 4 OF 10

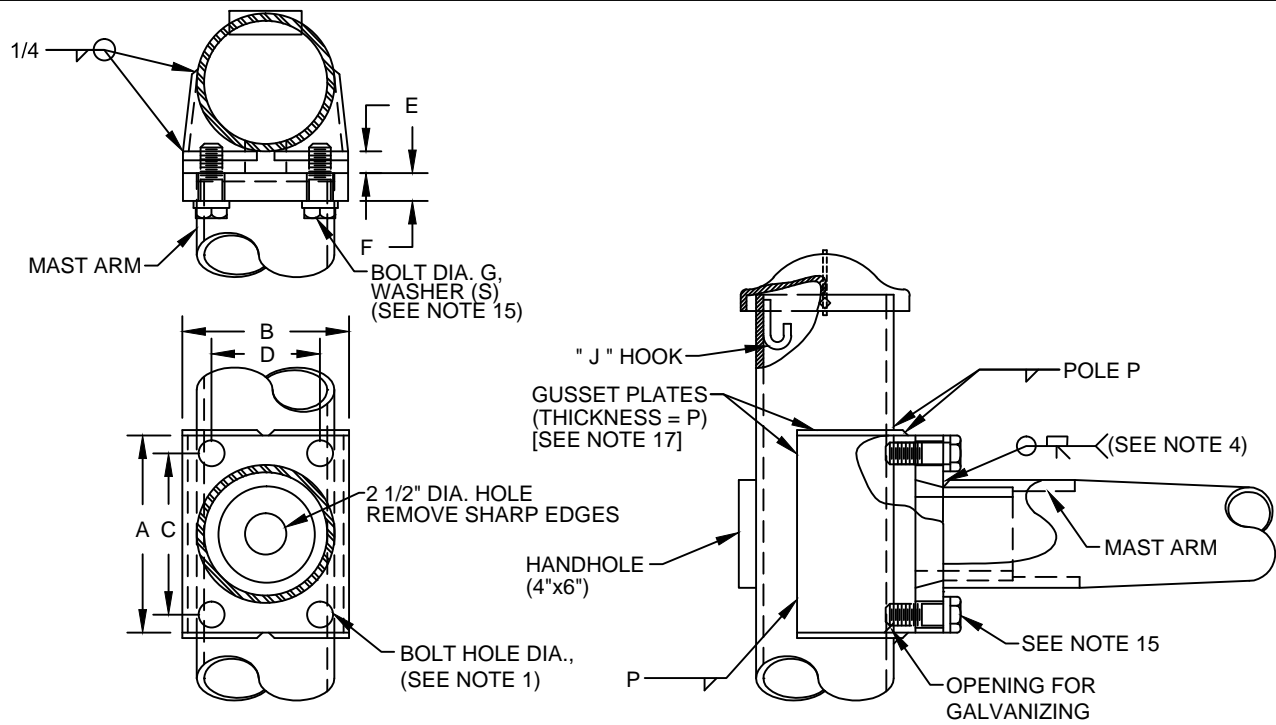

ARM ATTACHMENT (TYP.)
DESIGN 4, 12, 13 & 14

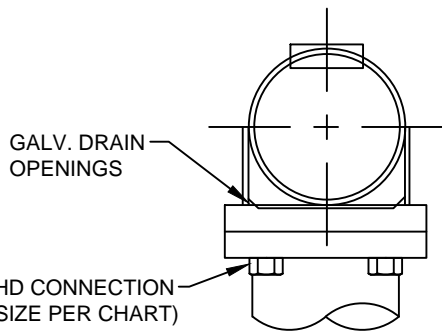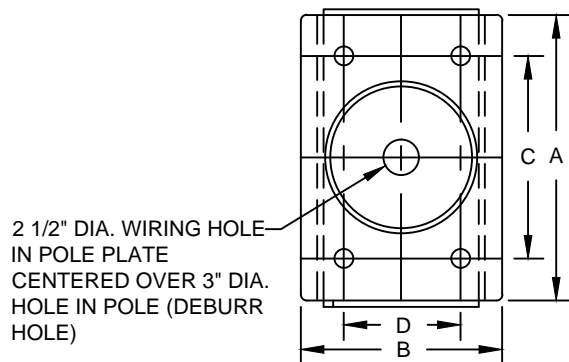

ARM ATTACHMENT (TYP.)
DESIGN C15

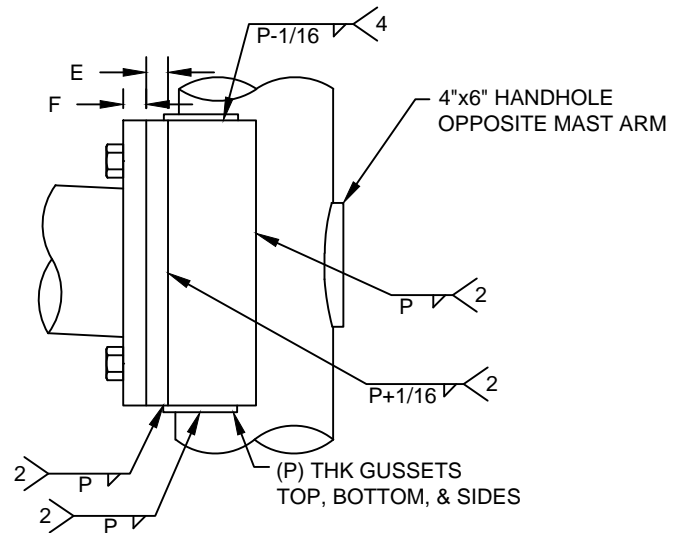

ARM ATTACHMENTS

STANDARD CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


STD DWG
4120

10/01/2018



CITY ENGINEER

SHT 5 OF 10


2.5" DIA. WIRING HOLE IN
POLE PLATE CENTERED
OVER 3" DIA. HOLE IN POLE
(DEBURR HOLE)

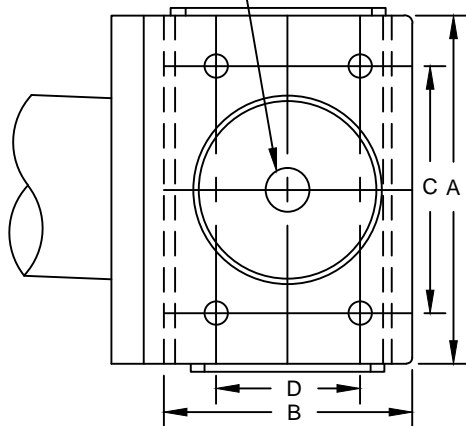

SEE WELD
DETAIL ON
SHEET 5

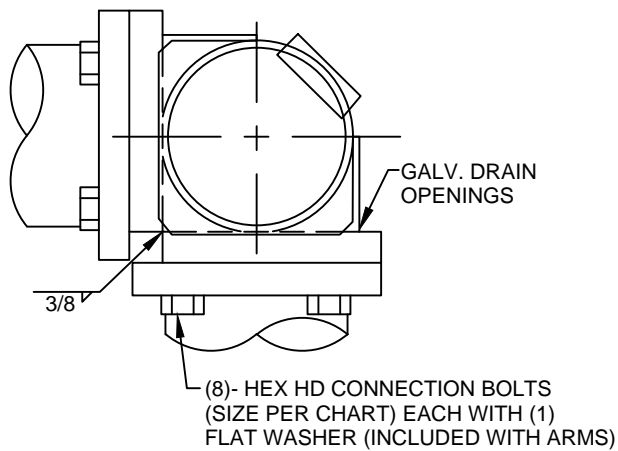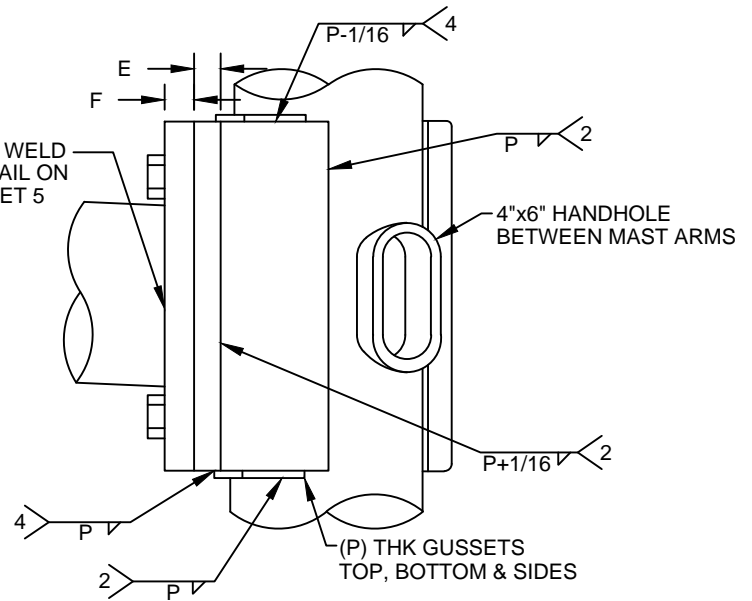

ARM ATTACHMENT (TYP.)
DESIGN C16

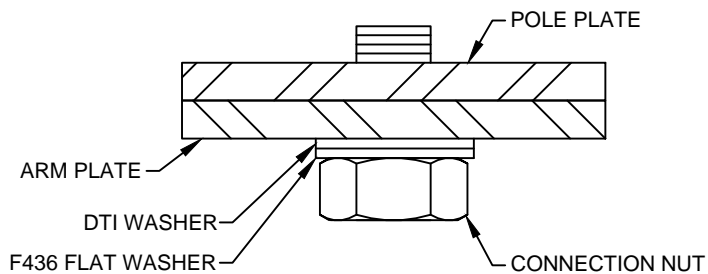

DTI WASHER PLACEMENT
(FOR DESIGNS 13, 14, C15 & C16)
(SEE NOTE 15)

**ARM ATTACHMENTS/
DTI WASHER PLACEMENT**

**STANDARD
CITY OF COLUMBUS
MAST ARM**


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4120

10/01/2018

SHT 6 OF 10

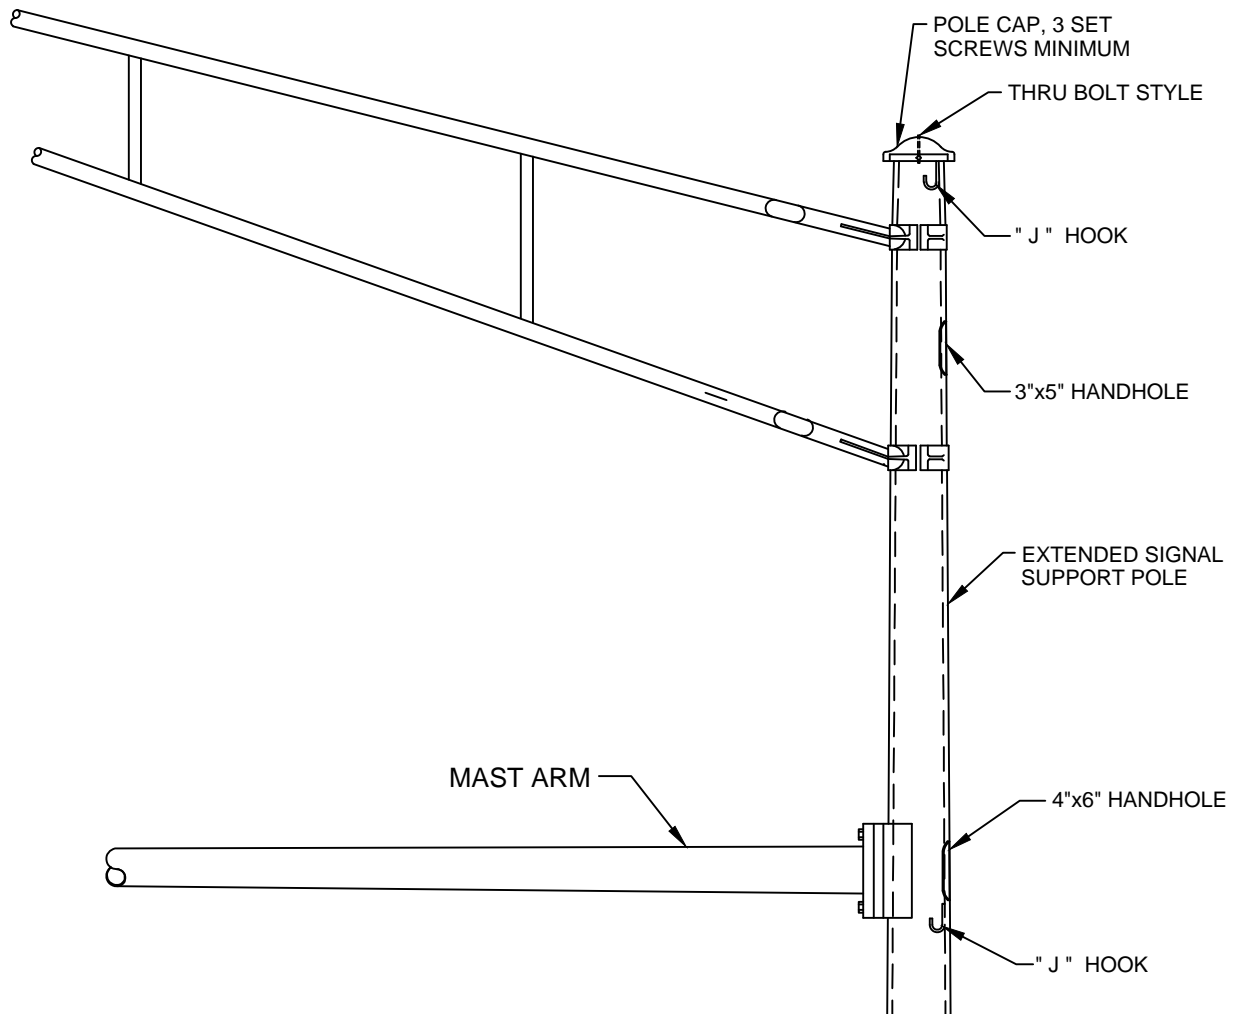

POLE EXTENSION FOR BRACKET ARM

POLE EXTENSION

STANDARD CITY OF COLUMBUS MAST ARM





CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4120

10/01/2018

CITY ENGINEER

SHT 7 OF 10

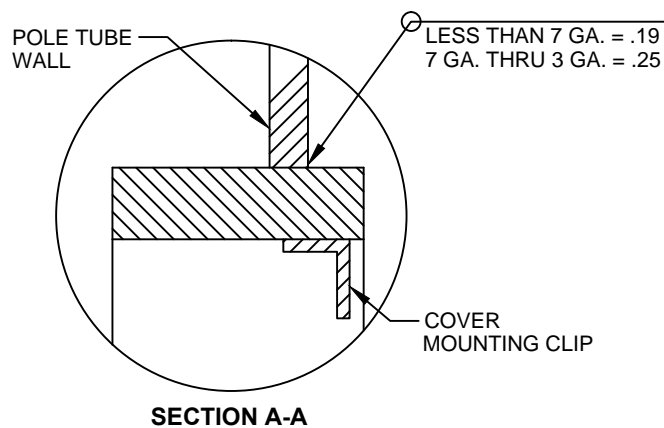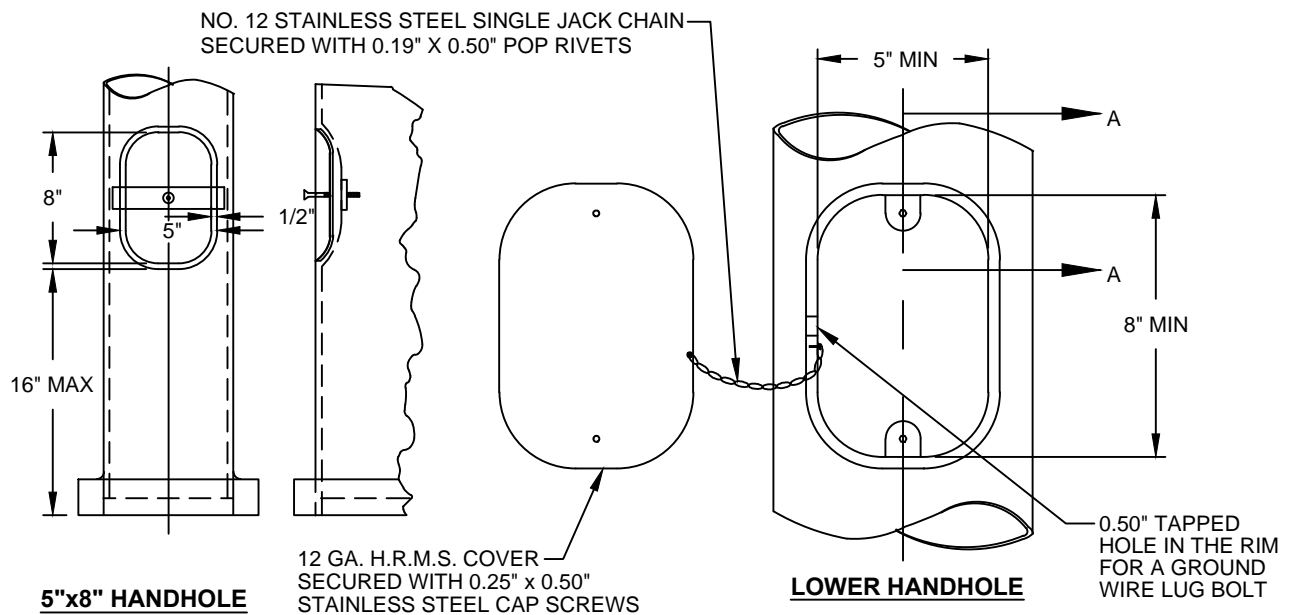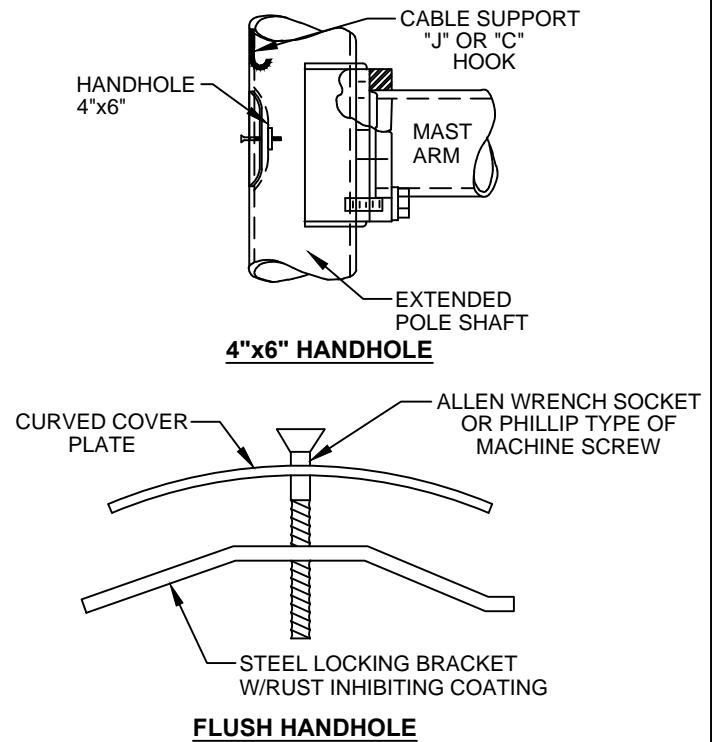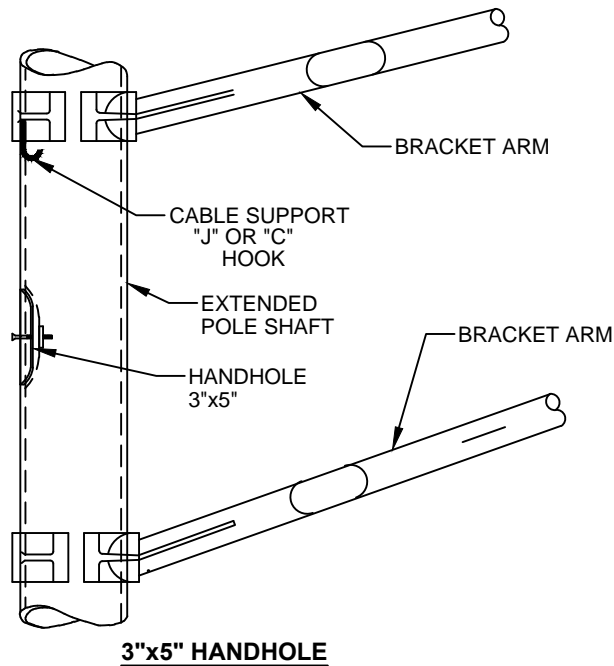

HANDHOLE	
STANDARD CITY OF COLUMBUS MAST ARM	
CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION	STD DWG 4120
	10/01/2018
CITY ENGINEER	SHT 8 OF 10

NOTES:

1. ARM PLATE HOLE DIAMETER SHALL BE BOLT DIAMETER PLUS 1/8" POLE PLATE TAPPED HOLE SHALL HAVE THREADS WITH 75% (MIN.) FULL PROFILE HEIGHT. THREADS MAY BE RETAPPED AFTER GALVANIZING. (SEE SHEET 5.)
2. FOR SIGN MOUNTING DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4251 AND 4252.
3. FOR FOUNDATION DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4160.
4. THE ARM ATTACHMENT PLATE SHALL BE WELDED USING A FULL PENETRATION WELD. THE POLE ATTACHMENT TO THE BASE PLATE SHALL BE WELDED USING A FULL PENETRATION WELD. (SEE SHEET 3 AND 5.)
5. FOR SIGNAL ATTACHMENT DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4201.
6. FOR BRACKET ARM DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWINGS 4110.
7. A MINIMUM OF ONE BOLT THREAD SHALL REMAIN ABOVE THE ANCHOR NUT. (SEE SHEET 3.)
8. ALL UNUSED COUPLINGS SHALL BE PROVIDED WITH A REMOVABLE GALVANIZED CAST IRON PLUG.
9. FOR POLE AND BASE PLATE DIMENSIONS, SEE TABLES 1A AND 1B. (SEE SHEET 2.)
10. WHEN FREE SWINGING VEHICULAR SIGNAL HEADS ARE PERMITTED, THE WIRE ENTRANCE PART OF THE SIGNAL HEAD MAY BE ORIENTED IN ANY DIRECTION TO KEEP THE CABLE DRIP LOOP FROM RUBBING ON THE SIGNAL HEAD. THE SIGNAL HEAD SHALL HANG LEVEL AND PLUMB. (SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4201.)
11. FOR DETAILS AND LOCATION OF HAND HOLES, SEE FLUSH HAND HOLE AND OPTIONAL HAND HOLE DETAILS. (SEE SHEET 8.)
12. THE DESIGN LOADS WERE CALCULATED AS THE EQUIVALENT AMOUNT OF SIGNAL AREA THAT COULD BE CARRIED AT THE END OF THE ARM.
13. THE DESIGN LOADS WERE DEVELOPED WITHOUT APPLYING GALLOPING FATIGUE LOADS. ALSO, THE STRESS REQUIREMENTS OF NOTE B, TABLE 11-2 IN THE AASHTO CODE WERE NOT APPLIED.
14. THESE STRUCTURES SHOULD BE INSPECTED FOR EXCESSIVE WIND INDUCED DEFLECTION IN THE VERTICAL DIRECTION. IF FOUND, A DAMPING DEVICE SHOULD BE PLACED ON THE ARM.
15. MAST ARM CONNECTION BOLTS SHALL BE ASTM A325 FOR DIAMETERS 1.50" AND SMALLER. BOLTS LARGER THAN DIAMETER 1.50" SHALL BE ASTM A449. DESIGNS 4 THROUGH 12 SHALL USE ASTM F436 FLAT WASHERS. DESIGN 13 AND C16 SHALL USE ASTM F959 DTI WASHERS. DESIGN 14 AND C15 SHALL USE ASTM F2437 TYPE 2 GRADE 5 DTI WASHERS. IF NECESSARY, I.D. OF DTI WASHERS SHALL BE GROUND OR REAMED TO FIT PROPERLY OVER ATTACHMENT BOLTS. PROVIDE PROPER DTI FEELER GAUGE TO ENGINEER. AN F436 WASHER SHALL BE USED DIRECTLY UNDER THE HEAD OF THE BOLT WITH ALL DTI WASHERS. ASSURE THAT THE FLAT WASHER DOES NOT SPIN DURING BOLT TIGHTENING WITH DTI WASHER. (SEE SHEET 5 AND 6).
16. AN APPROVED DAMPING DEVICE SHALL BE INSTALLED AS CLOSE AS POSSIBLE TO THE END OF THE ARM. MECHANICAL DAMPENING DEVICES SHALL BE INSTALLED ON ALL ARMS 59' OR LONGER. FLAT PLATE DAMPERS SHALL ONLY BE USED FOR NEW CONSTRUCTION IF DIRECTED BY THE PLANS OR THE ENGINEER. (SEE SHEET 1.) (SEE STD DWG 4122 FOR VIBRATION MITIGATION DEVICE.)
17. RING-STIFFENED WRAP-AROUND HORIZONTAL PLATES ARE PERMITTED AS AN ALTERNATIVE TO THE HORIZONTAL PLATES SHOWN. (SEE SHEET 5.)
18. PRODUCT SHOP DRAWINGS FOR ALL ITEMS SHALL BE SUBMITTED FOR APPROVAL TO THE CITY OF COLUMBUS.
19. THE STRUCTURAL INTEGRITY OF ALL PRODUCTS SHALL TAKE PRECEDENCE OVER STATED DESIGN DIMENSIONS IF THESE DIMENSIONS IN THE OPINION OF THE MANUFACTURER NEED TO BE INCREASED FOR THAT MANUFACTURER'S PRODUCT TO MEET THE REQUIRED DESIGN LOADING REQUIREMENTS. THE MANUFACTURER SHALL SUBMIT DESIGN CHANGES TO THE CITY OF COLUMBUS FOR REVIEW AND APPROVAL. THE STATED DIMENSIONS ARE SHOWN TO ALLOW FLEXIBILITY IN FUTURE PART REPLACEMENTS AND TO CREATE A STANDARD FOR THE INTERCHANGEABILITY OF PARTS WITHIN THE CITY OF COLUMBUS.
20. ALL PRE-DRILLED HOLES FOR ALL BID ITEMS SHALL BE DEBURRED AND FREE OF ALL SHARP EDGES. ALL OUTSIDE WELDS ON MAST ARM STRUCTURES AND TRAFFIC PEDESTAL STRUCTURES SHALL BE ROLLED OR GROUND SMOOTH. ALL INSIDE WELDS ON MAST ARM STRUCTURES AND TRAFFIC PEDESTAL STRUCTURES SHALL BE VOID OF SHARP EDGES.
21. NO FOUNDATION BOLT PATTERN CHANGE SHALL BE ALLOWED FOR THE POLE SHAFT BASE PLATE. THE POLE BASE PLATE MUST FIT THE GIVEN FOUNDATION BOLT PATTERN AS SHOWN ON CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4160.

STANDARD CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4120

10/01/2018

CITY ENGINEER

SHT 9 OF 10

22. SIGNAL SUPPORTS SHALL BE HOT DIPPED GALVANIZED AND COATED IN ACCORDANCE WITH THE PLANS.
23. SUPPORTS SHALL HAVE 1, 2, OR 3 HAND HOLES, AS PER PLAN DESIGN, EACH COMPLETE WITH A COVER, A RECTANGULAR OR ELLIPTICAL REINFORCED FRAME, AND A STAINLESS STEEL FASTENER FOR THE COVER. THE FASTENER SHALL BE FLUSH WITH THE HAND HOLE SURFACE. THE HAND HOLES SHALL BE LOCATED 180 DEGREES FROM THE MAST ARM UNLESS SPECIFIED OTHERWISE. (SEE SHEET 8.)
 - A.) THE HAND HOLE NEAR THE BRACKET ARM SHALL HAVE A MINIMUM INSIDE OPENING OF 3" X 5" AND BE SIMILAR IN DESIGN TO THE BOTTOM HAND HOLE EXCEPT THAT NO GROUNDING PROVISION IS REQUIRED.
 - B.) THE HAND HOLE NEAR THE ARM ATTACHMENT SHALL HAVE A MINIMUM INSIDE OPENING OF 4" X 6" AND BE SIMILAR IN DESIGN TO THE BOTTOM HAND HOLE EXCEPT THAT NO GROUNDING PROVISION IS REQUIRED.
 - C.) THE BOTTOM HAND HOLE SHALL HAVE A MINIMUM INSIDE OPENING OF 5" X 8". A GROUNDING PROVISION CAPABLE OF ACCEPTING 4 - #4 AWG COPPER GROUNDING WIRES SHALL BE PROVIDED AND SHALL BE ATTACHED TO THE FRAME.
24. SUPPORT SHALL HAVE A REMOVABLE POLE CAP ATTACHED EITHER BY A MINIMUM OF 3 STAINLESS STEEL SET SCREWS OR BY A STAINLESS STEEL THROUGH BOLT. (SEE SHEET 7.)
25. SUPPORTS SHALL HAVE A STEEL POLE BASE PLATE/ANCHOR BOLT-NUT COVER (1/4" THICK SQUARE PLATE, TWO PIECE CONSTRUCTION, GALVANIZED TO ASTM A123 THEN COATED) THAT SKIRTS THE BOLTS, NUTS AND BASE PLATE. ALL SCREW HOLES SHALL BE PRE-DRILLED AND STAINLESS STEEL FASTENERS SHALL BE USED. (SEE SHEET 4.)
26. SUPPORTS SHALL HAVE 1, 2, OR 3 WELDED CABLE SUPPORT HOOKS ('J' OR 'C' HOOKS) LOCATED ON THE INSIDE OF THE POLE AND 90 DEGREES FROM THE MAST ARM. (SEE SHEET 7.)
27. THE ARM SHALL MAINTAIN A CIRCULAR CROSS-SECTION (CONSTANT CROSS-SECTIONAL RADIUS).
28. THE ARM SHALL HAVE A REMOVABLE END-OF-ARM CAP ATTACHED BY A MINIMUM OF 3 STAINLESS STEEL SET SCREWS. THIS WILL BE THE ONLY ATTACHMENT METHOD ACCEPTABLE. THE INSIDE DIAMETER OF THE END-OF-ARM CAP SHALL BE EQUAL TO THE END-OF-ARM OUTSIDE DIAMETER PLUS TWO TIMES THE ARM TAPER.
29. THE ARM SHALL NOT HAVE PRE-DRILLED HOLES FOR SIGNAL HEAD CABLE ENTRY. THE CONTRACTOR SHALL FIELD DRILL THESE HOLES.
30. THE SUPPORTS SHALL BE DESIGNED USING THE 2009 EDITION OF THE AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS. THE FOLLOWING CRITERIA SHALL BE USED FOR THE DESIGN: BASIC WIND SPEED - 90 MPH, DESIGN LIFE - 25 YEARS, FATIGUE CATEGORY III. ADDITIONALLY, THE SUPPORT DESIGNS SHALL NOT INCLUDE GALLOPING OR TRUCK INDUCED GUST LOADING.

STANDARD CITY OF COLUMBUS MAST ARM


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4120

CITY ENGINEER

10/01/2018

SHT 10 OF 10

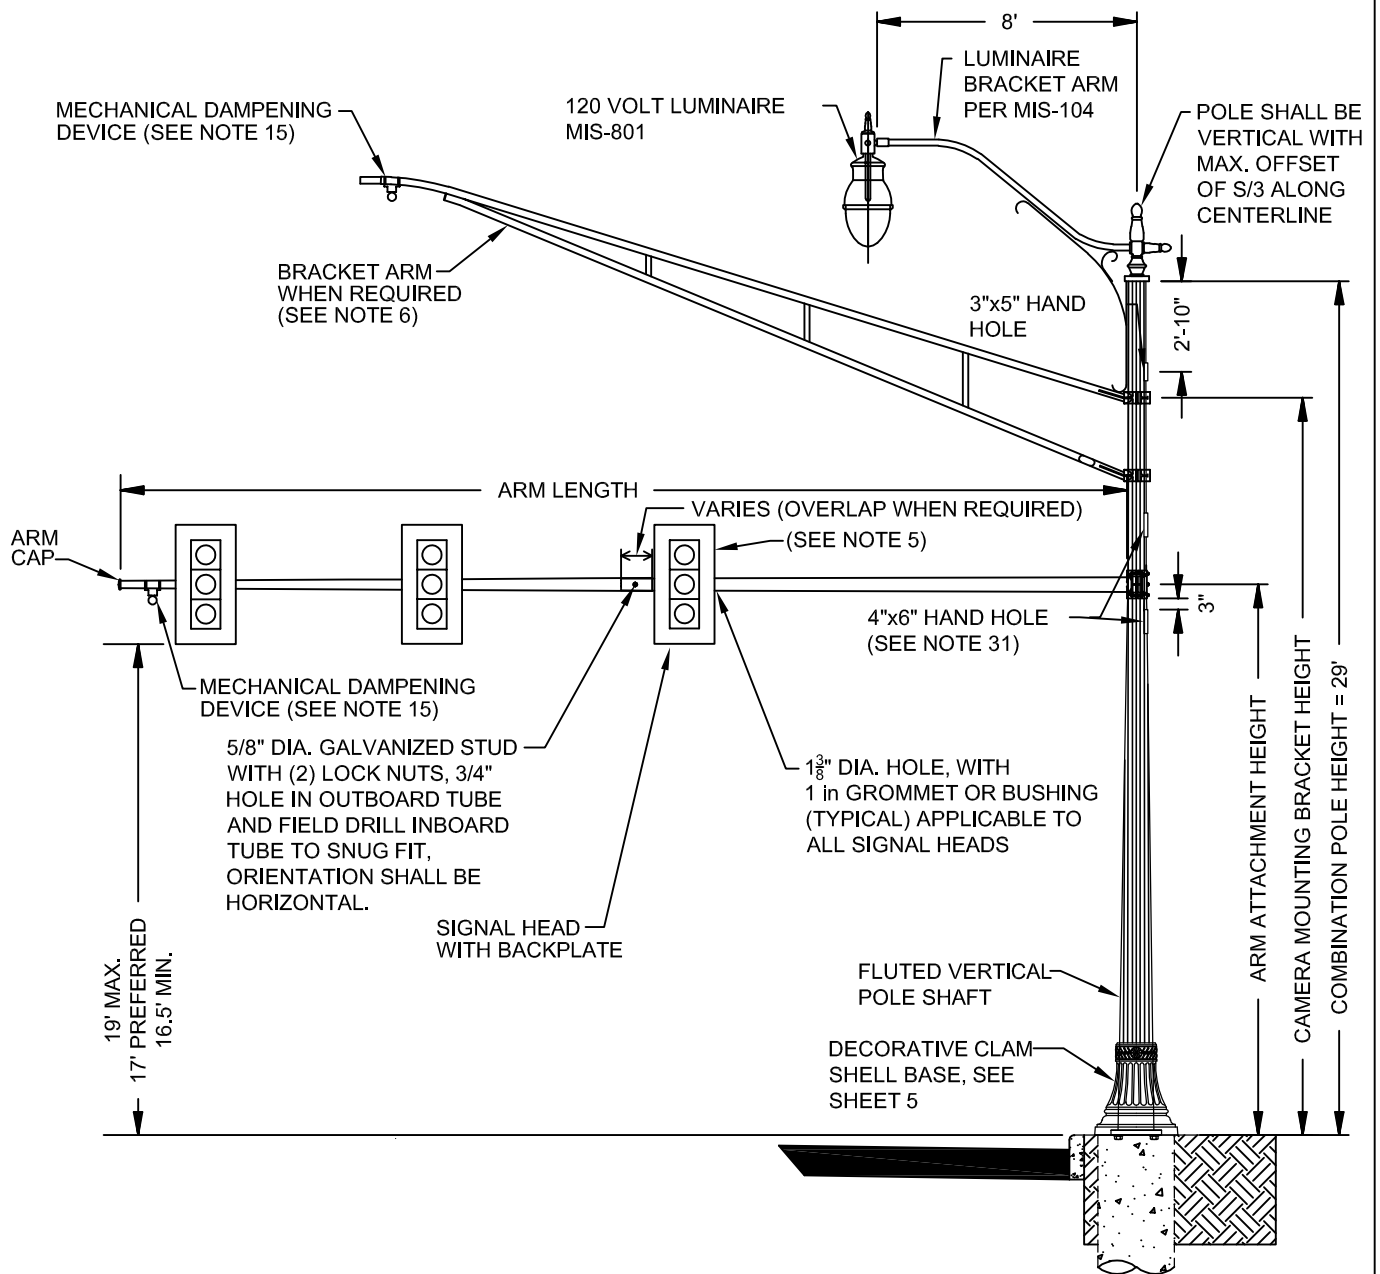

COMBINATION POLE

DECORATIVE CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION



STD DWG

4121

07/01/2020

CITY ENGINEER

SHT 1 OF 10

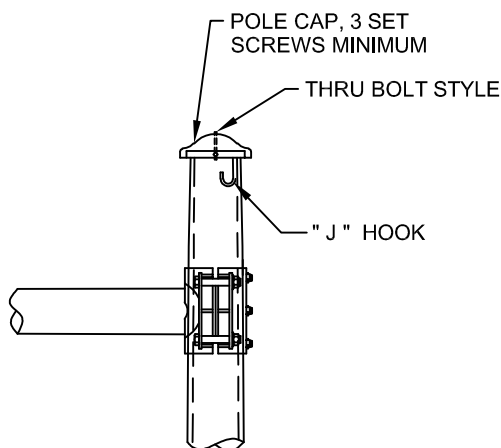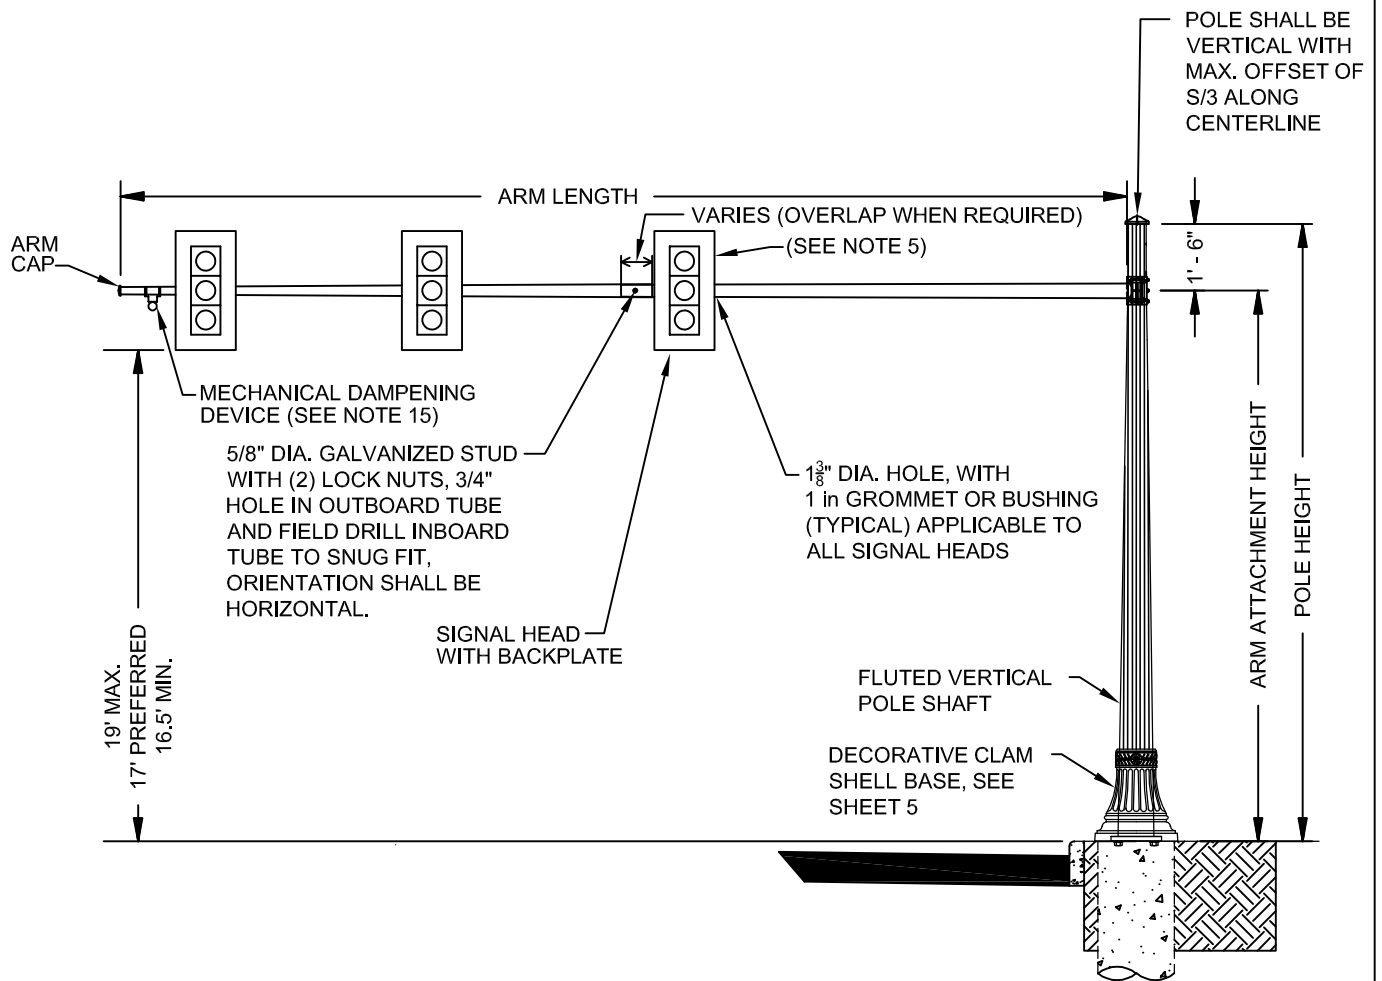

POLE CAP DETAIL
(FOR POLES WITHOUT LUMINAIRES ONLY)

NON-COMBINATION POLE

DECORATIVE CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4121

07/01/2020

CITY ENGINEER

SHT 2 OF 10

TABLE 1 - PART A - POLE DIMENSIONS

DESIGN NO.	MAXIMUM DESIGN AREA SQ FT (NOTE A)	DESIGN DISTANCE FROM CL FT	POLE			ARM			
			TYPE	WALL THICK	BASE DIAMETER	MAX. LENGTH	TYPE	WALL THICK	SIZE
4	42	37.5	16-FLUTES	.250	13.00	38'	ROUND	.250	10.50x5.18x38"
12	42	47.5	16-FLUTES	.250	14.50	48'	ROUND	.250	11.50x7.72x27' +
								.179	8.33x5.18x22.5'
13	40	59.5	16-FLUTES	.250	16.00	60'	ROUND	.313	11.50x7.72x27' +
								.179	8.33x3.47x34'
14	38	69.5	16-FLUTES	.313	15.50	70'	ROUND	.313	12.75x8.41x31' +
								.179	9.05x3.31x41'
C15	50	78.5	16-FLUTES	.313	18.00	79'	ROUND	.313	14.25x8.65x40' +
								.250	9.44x3.70x41'
C16 (DOUBLE ARM)	48 / 48	49.5 49.5	16-FLUTES	.313	15.50	50'/50'	ROUND	.250	12.00x9.62x17' +
								.179	10.26x5.40x34.75'
								.250	12.00x9.62x17' +
								.179	10.26x5.40x34.75'

ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE NOTED.

*=SINGLE PIECE ARM

TABLE 1 - PART B - POLE DIMENSIONS

DESIGN NO.	ARM ATTACHMENT									ANCHOR BASE						
	A1	A2	B	C	D	E	F	G	U	BOLT CIRCLE	S	J	K	T	R	H
4	17.5	19.5	17.5	14	14	1.5	1.25	1.25	10	18	18.5	12.75	6	2	2	2.13
12	19	21	19	15	15	1.5	1.25	1.25	11	20	20.5	14.13	6	2	2	2.38
13	21	23	21	17	17	2	1.5	1.5	13	22	23	15.56	6	2	3.5	2.38
14	21	23	21	17	17	2	1.5	1.5	13	22	23	15.56	6	2	3.5	2.38
C15	25	27	25	20	20	2	2	2	16	24	24	17	8	2	2	2.38
C16 (DOUBLE ARM)	21	23	21	17	17	2	1.5	1.5	13	22	23	15.56	6	2	3.5	2.38
	21	23	21	17	17	2	1.5	1.5	13							

ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE NOTED.

THESE DESIGNS USE FULL PENETRATION WELDS AT THE ARM AND BASE PLATE CONNECTIONS.

NOTES:

A. MAXIMUM DESIGN AREA IS BASED ON 90 MPH DESIGN WIND SPEED WITH A PRESSURE OF 25 PSF.

B. DIMENSION LOCATIONS ARE ILLUSTRATED ON SHEETS 4 & 6.

DECORATIVE CITY OF COLUMBUS MAST ARM

 CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION




STD DWG

4121

07/01/2020

SHT 3 OF 10

CITY ENGINEER

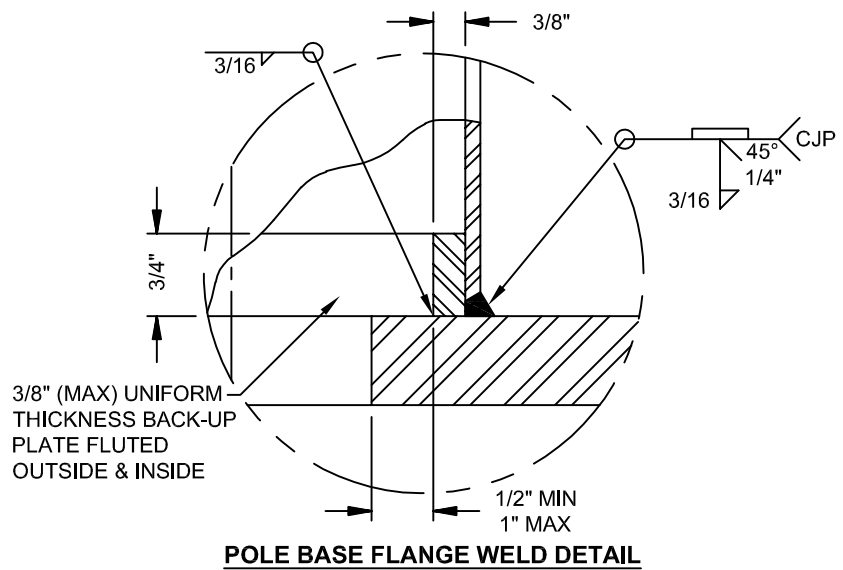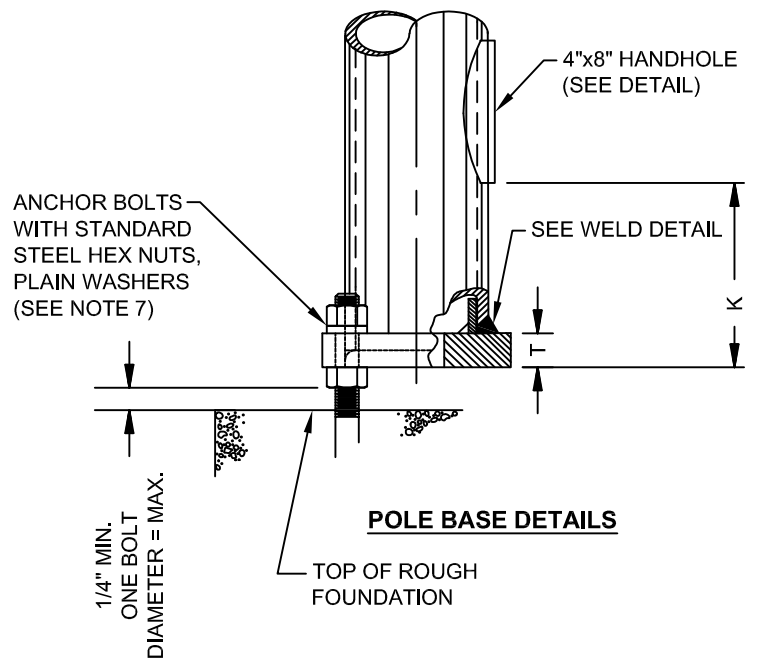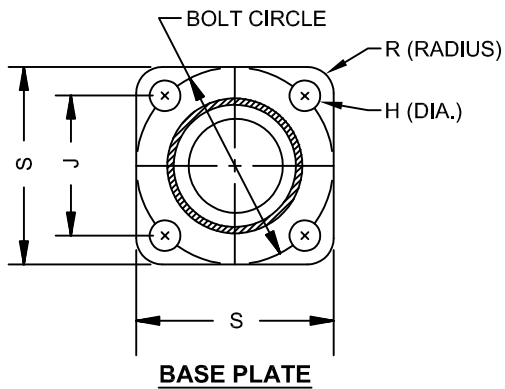

BASE CONNECTION

DECORATIVE CITY OF COLUMBUS MAST ARM


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4121

07/01/2020



CITY ENGINEER

SHT 4 OF 10



16 SHARP FLUTE

PEDESTRIAN
PUSHBUTTON

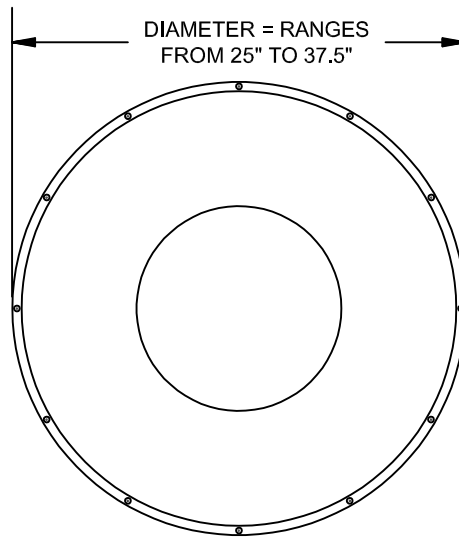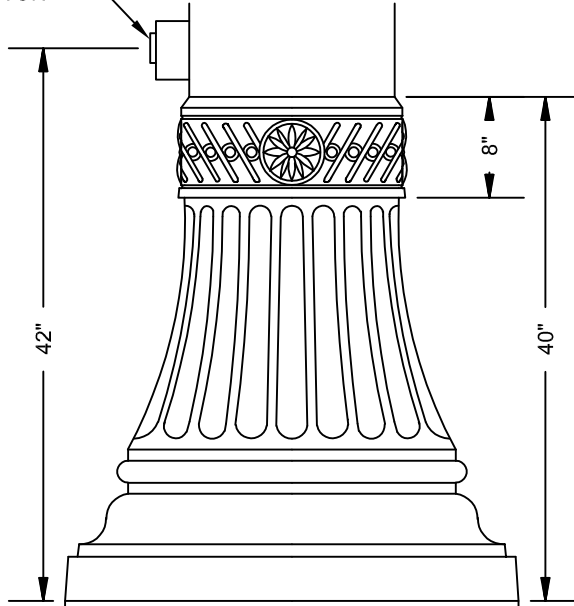

DIAMETER = RANGES
FROM 25" TO 37.5"

NOTES:

THE HANDHOLE IN DECORATIVE BASE SHALL
BE OF SUFFICIENT SIZE AND BE ALIGNED WITH
THE HANDHOLE IN THE SUPPORT POLE TO
ALLOW FULL ACCESS TO THE POLE HANDHOLE.

DECORATIVE BASE MATERIAL SHALL BE MADE
FROM CAST ALUMINUM.

DECORATIVE BASE

DECORATIVE
CITY OF COLUMBUS
MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

4121


07/01/2020

SHT 5 OF 10

CITY ENGINEER


(G)-STUD DIA. (4)-STUDS
EACH WITH (2)-HEX NUTS
& (2) FLAT WASHERS (SEE
NOTE 1 AND 30)

TYP $\frac{1}{4}$ V

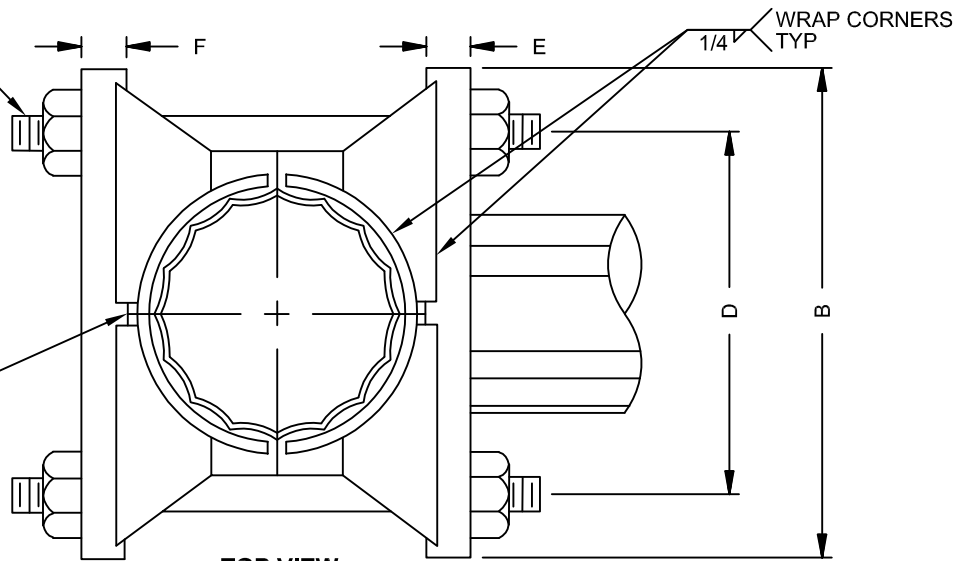


TOP VIEW

(2)-1/2" 13NC x 3 1/2" LG HEX
HD CAP SCREWS (FIELD
DRILL 5/8" DIA. HOLES IN
POLE) 3/16" DIA. HOLES
THRU PIPE & BOLT FOR 1/8"
x 1 1/2" COTTER PINS

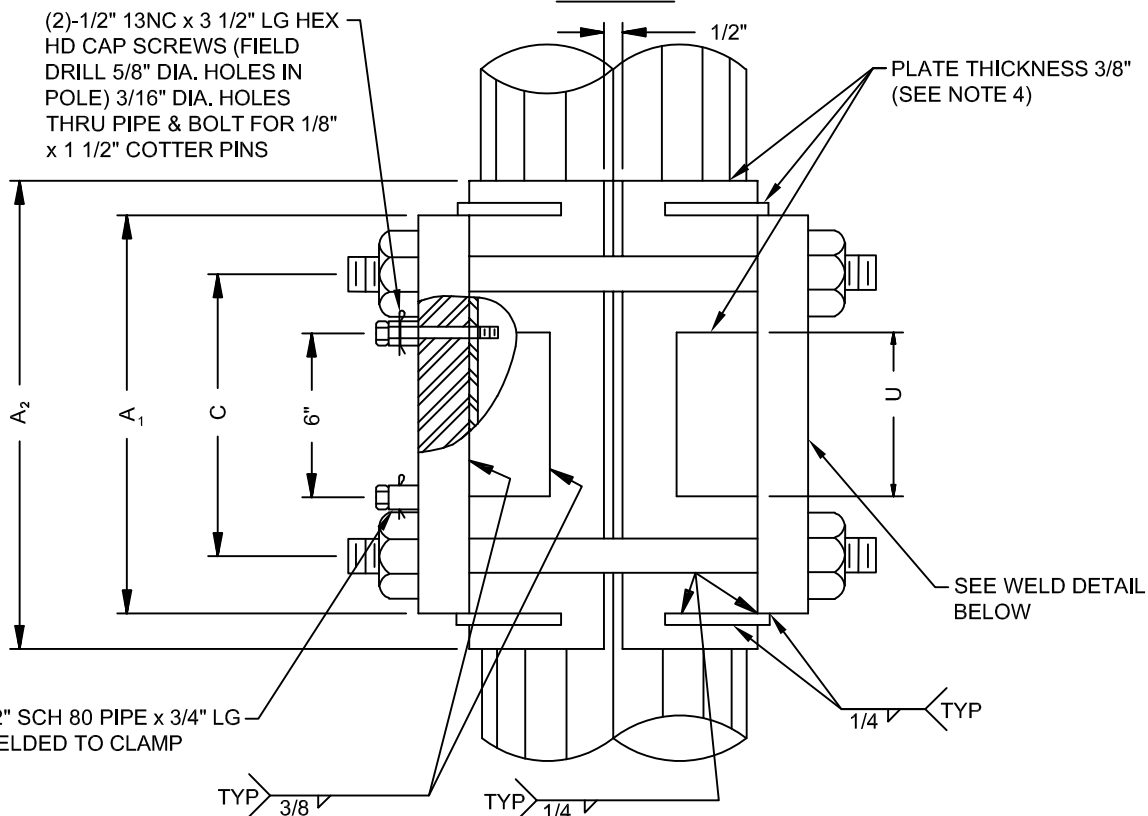

SECTION VIEW

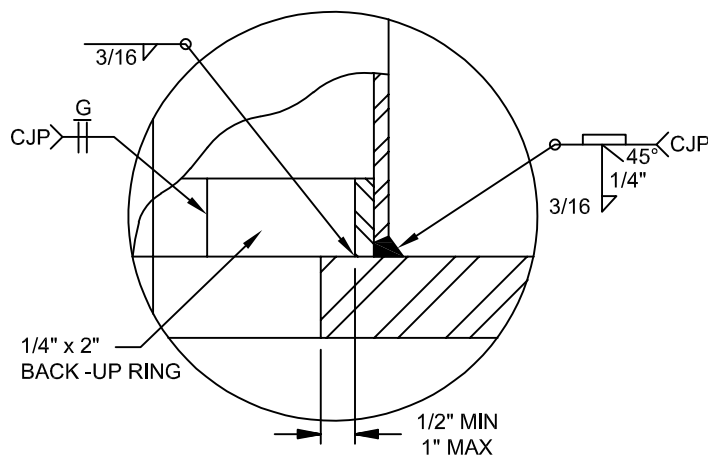

ARM FLANGE WELD DETAIL

MAST ARM CLAMP CONNECTION

DECORATIVE CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


STD DWG

4121


07/01/2020

SHT 6 OF 10

CITY ENGINEER

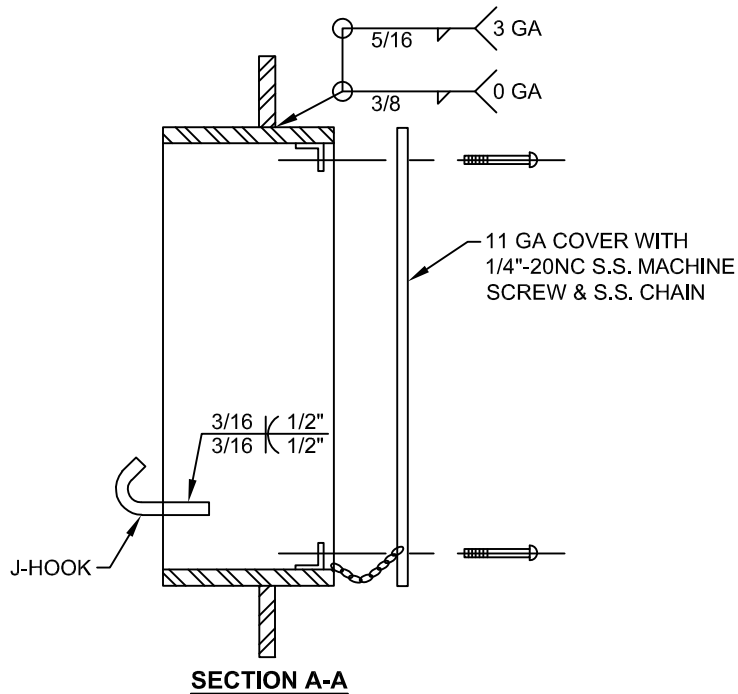


SECTION A-A

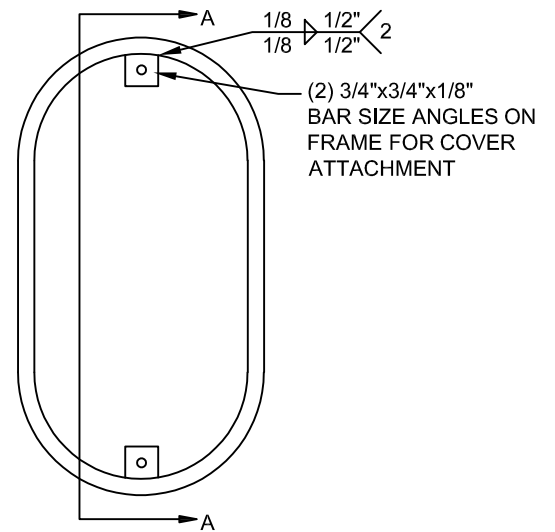


FRONT VIEW

3" x 5" HANDHOLE NEAR BRACKET ARM FRAME DETAIL

4" x 6" HANDHOLE NEAR MAST ARM FRAME DETAIL

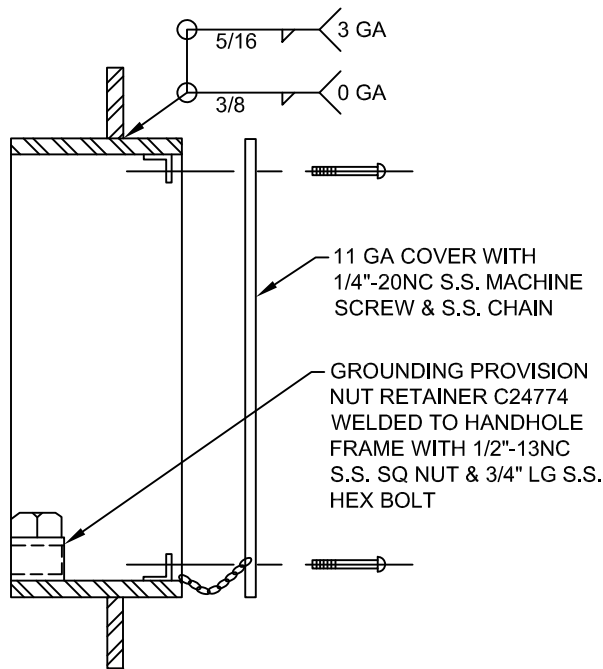

SECTION A-A

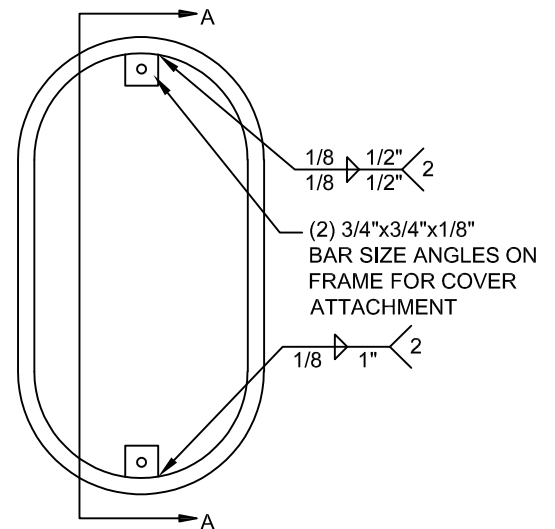

FRONT VIEW

4" x 8" BOTTOM HANDHOLE FRAME DETAIL

HANDHOLE

DECORATIVE CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


STD DWG

4121

07/01/2020


CITY ENGINEER

SHT 7 OF 10

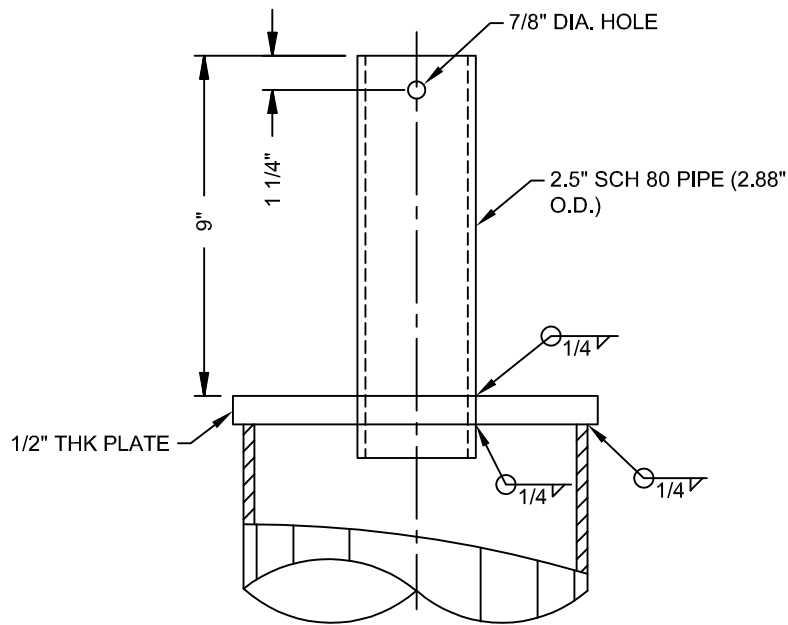

TOP OF POLE DETAIL
(FOR POLES WITH LUMINAIRE ONLY)

LUMINAIRE BRACKET ARM NOT SHOWN FOR CLARITY. SEE MIS-104 FOR ADDITIONAL DETAILS.

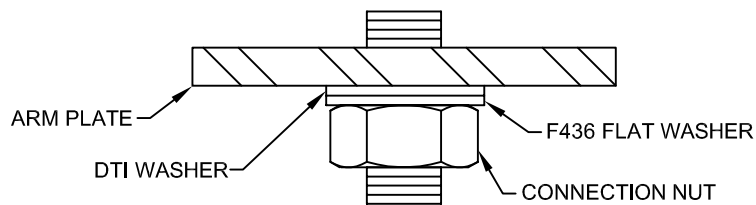

DTI WASHER PLACEMENT
(FOR DESIGNS 13, 14, C15 & C16)
(SEE NOTE 30)

POLE TENON / DTI WASHER PLACEMENT

DECORATIVE CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4121

07/01/2020

CITY ENGINEER

SHT 8 OF 10

NOTES:

1. ARM PLATE HOLE DIAMETER SHALL BE BOLT DIAMETER PLUS 1/8". (SEE SHEETS 1 AND 2.)
2. FOR SIGN MOUNTING DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4251 AND 4252.
3. FOR FOUNDATION DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4160.
4. THE ARM ATTACHMENT PLATE SHALL BE WELDED USING A FULL PENETRATION WELD. THE POLE ATTACHMENT TO THE BASE PLATE SHALL BE WELDED USING A FULL PENETRATION WELD. (SEE SHEETS 4 AND 6.)
5. FOR SIGNAL ATTACHMENT DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4201.
6. FOR BRACKET ARM DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWINGS 4110.
7. A MINIMUM OF ONE BOLT THREAD SHALL REMAIN ABOVE THE ANCHOR NUT. (SEE SHEET 4.)
8. ALL UNUSED COUPLINGS SHALL BE PROVIDED WITH A REMOVABLE GALVANIZED CAST IRON PLUG.
9. FOR POLE AND BASE PLATE DIMENSIONS, SEE TABLES 1A AND 1B. (SEE SHEET 3.)
10. WHEN FREE SWINGING VEHICULAR SIGNAL HEADS ARE PERMITTED, THE WIRE ENTRANCE PART OF THE SIGNAL HEAD MAY BE ORIENTED IN ANY DIRECTION TO KEEP THE CABLE DRIP LOOP FROM RUBBING ON THE SIGNAL HEAD. THE SIGNAL HEAD SHALL HANG LEVEL AND PLUMB. (SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4201.)
11. FOR DETAILS AND LOCATION OF HAND HOLES, SEE FLUSH HAND HOLE AND OPTIONAL HAND HOLE DETAILS. (SEE SHEETS 1, 2, AND 7.)
12. THE DESIGN LOADS WERE CALCULATED AS THE EQUIVALENT AMOUNT OF SIGNAL AREA THAT COULD BE CARRIED AT THE END OF THE ARM.
13. THE DESIGN LOADS WERE DEVELOPED WITHOUT APPLYING GALLOPING FATIGUE LOADS. ALSO, THE STRESS REQUIREMENTS OF NOTE B, TABLE 11-2 IN THE AASHTO CODE WERE NOT APPLIED.
14. THESE STRUCTURES SHOULD BE INSPECTED FOR EXCESSIVE WIND INDUCED DEFLECTION IN THE VERTICAL DIRECTION. IF FOUND, A DAMPING DEVICE SHOULD BE PLACED ON THE ARM.
15. AN APPROVED DAMPING DEVICE SHALL BE INSTALLED AS CLOSE AS POSSIBLE TO THE END OF THE ARM. MECHANICAL DAMPENING DEVICES SHALL BE INSTALLED ON ALL ARMS 59' OR LONGER. FLAT PLATE DAMPERS SHALL ONLY BE USED FOR NEW CONSTRUCTION IF DIRECTED BY THE PLANS OR THE ENGINEER. (SEE SHEETS 1 AND 2.)
16. A TENON SHALL BE PROVIDED TO ACCOMMODATE THE LUMINAIRE BRACKET ARM. (SEE SHEET 8).
17. PRODUCT SHOP DRAWINGS FOR ALL ITEMS SHALL BE SUBMITTED FOR APPROVAL TO THE CITY OF COLUMBUS.
18. THE STRUCTURAL INTEGRITY OF ALL PRODUCTS SHALL TAKE PRECEDENCE OVER STATED DESIGN DIMENSIONS IF THESE DIMENSIONS IN THE OPINION OF THE MANUFACTURER NEED TO BE INCREASED FOR THAT MANUFACTURER'S PRODUCT TO MEET THE REQUIRED DESIGN LOADING REQUIREMENTS. THE MANUFACTURER SHALL SUBMIT DESIGN CHANGES TO THE CITY OF COLUMBUS FOR REVIEW AND APPROVAL. THE STATED DIMENSIONS ARE SHOWN TO ALLOW FLEXIBILITY IN FUTURE PART REPLACEMENTS AND TO CREATE A STANDARD FOR THE INTERCHANGEABILITY OF PARTS WITHIN THE CITY OF COLUMBUS.
19. ALL PRE-DRILLED HOLES FOR ALL BID ITEMS SHALL BE DEBURRED AND FREE OF ALL SHARP EDGES. ALL OUTSIDE WELDS ON MAST ARM STRUCTURES AND TRAFFIC PEDESTAL STRUCTURES SHALL BE ROLLED OR GROUND SMOOTH. ALL INSIDE WELDS ON MAST ARM STRUCTURES AND TRAFFIC PEDESTAL STRUCTURES SHALL BE VOID OF SHARP EDGES.
20. NO FOUNDATION BOLT PATTERN CHANGE SHALL BE ALLOWED FOR THE POLE SHAFT BASE PLATE. THE POLE BASE PLATE MUST FIT THE GIVEN FOUNDATION BOLT PATTERN AS SHOWN ON CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4160.

DECORATIVE CITY OF COLUMBUS MAST ARM

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4121

07/01/2020

SHT 9 OF 10

21. SIGNAL SUPPORTS SHALL BE HOT DIPPED GALVANIZED AND COATED IN ACCORDANCE WITH THE PLANS.
22. SUPPORTS SHALL HAVE 1, 2, OR 3 HAND HOLES, AS PER PLAN DESIGN, EACH COMPLETE WITH A COVER, A RECTANGULAR OR ELLIPTICAL REINFORCED FRAME, AND A STAINLESS STEEL FASTENER FOR THE COVER. THE FASTENER SHALL BE FLUSH WITH THE HAND HOLE SURFACE. THE HAND HOLES SHALL BE LOCATED 180 DEGREES FROM THE MAST ARM UNLESS SPECIFIED OTHERWISE. (SEE SHEET 7.)
 - A.) THE HAND HOLE NEAR THE BRACKET ARM SHALL HAVE A MINIMUM INSIDE OPENING OF 3" X 5" AND BE SIMILAR IN DESIGN TO THE BOTTOM HAND HOLE EXCEPT THAT NO GROUNDING PROVISION IS REQUIRED.
 - B.) THE HAND HOLE NEAR THE ARM ATTACHMENT SHALL HAVE A MINIMUM INSIDE OPENING OF 4" X 6" AND BE SIMILAR IN DESIGN TO THE BOTTOM HAND HOLE EXCEPT THAT NO GROUNDING PROVISION IS REQUIRED.
 - C.) THE BOTTOM HAND HOLE SHALL HAVE A MINIMUM INSIDE OPENING OF 4" X 8". A GROUNDING PROVISION CAPABLE OF ACCEPTING 4 - #4 AWG COPPER GROUNDING WIRES SHALL BE PROVIDED AND SHALL BE ATTACHED TO THE FRAME.
23. THE VERTICAL POLE SHAFT SHALL HAVE 16 SHARP FLUTES.
24. THE DECORATIVE BASE SHALL BE AS DETAILED ON SHEET 5.
25. SUPPORTS SHALL HAVE 1, 2 OR 3 WELDED CABLE SUPPORT HOOKS ('J' OR 'C' HOOKS) LOCATED ON THE INSIDE OF THE POLE AND 90 DEGREES FROM THE MAST ARM.
26. THE ARM SHALL MAINTAIN A CIRCULAR CROSS-SECTION (CONSTANT CROSS-SECTIONAL RADIUS).
27. THE ARM SHALL HAVE A REMOVABLE END-OF-ARM CAP ATTACHED BY A MINIMUM OF 3 STAINLESS STEEL SET SCREWS. THIS WILL BE THE ONLY ATTACHMENT METHOD ACCEPTABLE. THE INSIDE DIAMETER OF THE END-OF-ARM CAP SHALL BE EQUAL TO THE END-OF-ARM OUTSIDE DIAMETER PLUS TWO TIMES THE ARM TAPER.
28. THE ARM SHALL NOT HAVE PRE-DRILLED HOLES FOR SIGNAL HEAD CABLE ENTRY. THE CONTRACTOR SHALL FIELD DRILL THESE HOLES.
29. THE SUPPORTS SHALL BE DESIGNED USING THE 2009 EDITION OF THE AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS. THE FOLLOWING CRITERIA SHALL BE USED FOR THE DESIGN: BASIC WIND SPEED - 90 MPH, DESIGN LIFE - 25 YEARS, FATIGUE CATEGORY III. ADDITIONALLY, THE SUPPORT DESIGNS SHALL NOT INCLUDE GALLOPING OR TRUCK INDUCED GUST LOADING.
30. MAST ARM CONNECTION BOLTS SHALL BE ASTM A325 FOR DIAMETERS 1.50" AND SMALLER. BOLTS LARGER THAN DIAMETER 1.50" SHALL BE ASTM A449. DESIGNS 4 THROUGH 12 SHALL USE ASTM F436 FLAT WASHERS. DESIGN 13 AND C16 SHALL USE ASTM F959 DTI WASHERS. DESIGN 14 AND C15 SHALL USE ASTM F2437 TYPE 2 GRADE 5 DTI WASHERS. IF NECESSARY, I.D. OF DTI WASHERS SHALL BE GROUND OR REAMED TO FIT PROPERLY OVER ATTACHMENT BOLTS. PROVIDE PROPER DTI FEELER GAUGE TO ENGINEER. AN F436 WASHER SHALL BE USED DIRECTLY UNDER THE HEAD OF THE BOLT WITH ALL DTI WASHERS. ASSURE THAT THE FLAT WASHER DOES NOT SPIN DURING BOLT TIGHTENING WITH DTI WASHER. (SEE SHEETS 6 AND 8).
31. THE 4"X6" HAND HOLE (COMBINATION POLE ONLY) SHOULD BE PLACED ABOVE THE MAST ARM WHEN FEASIBLE. HAND HOLE MAY BE PLACED BELOW THE MAST ARM WHEN MAST ARM AND BRACKET ARM MOUNTING HEIGHTS DO NOT PROVIDE SUFFICIENT ROOM.

DECORATIVE CITY OF COLUMBUS MAST ARM



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4121

CITY ENGINEER

07/01/2020

SHT 10 OF 10

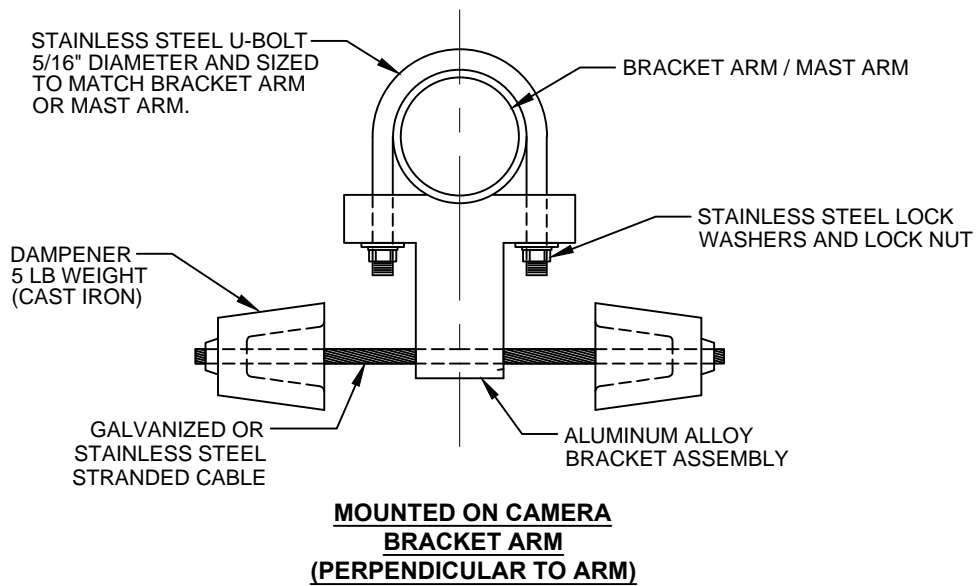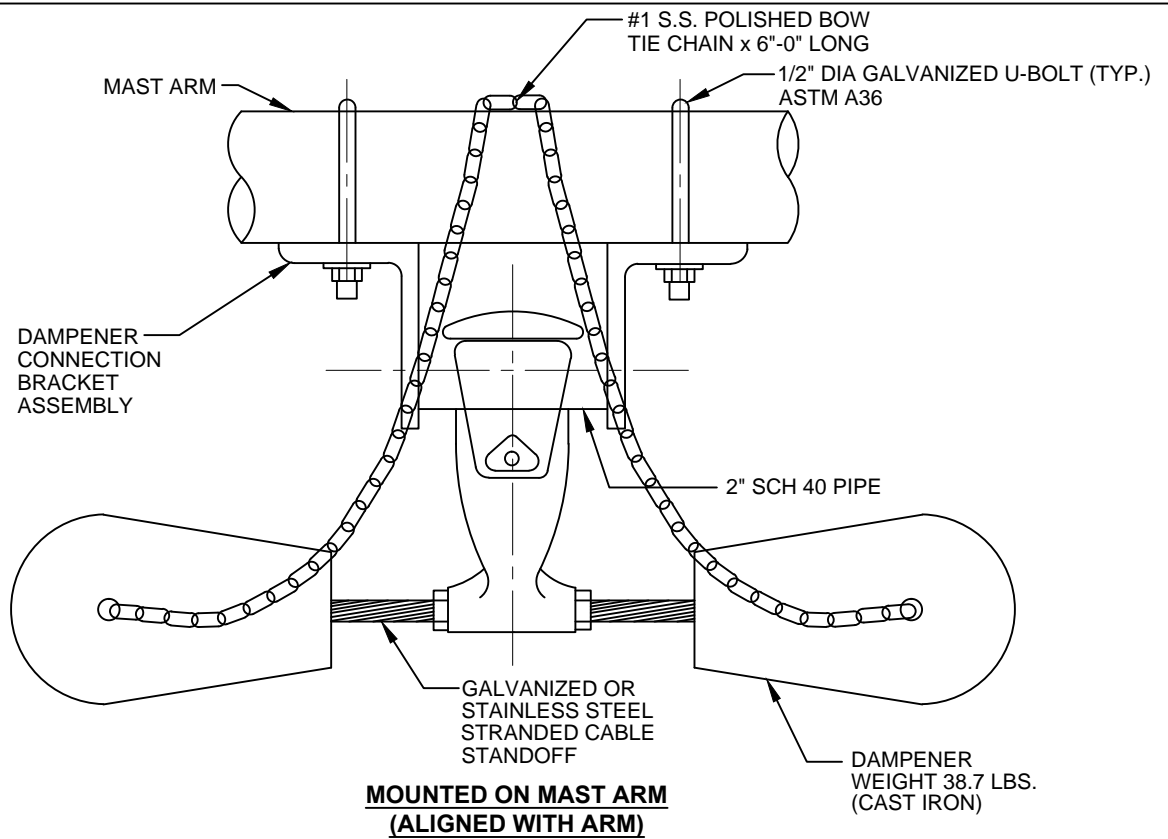

NOTE:

NON-STAINLESS STEEL ITEMS
SHALL BE COATED TO MATCH
BRACKET / MAST ARM.

MECHANICAL DAMPENING DEVICE



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4122

10/01/2018

CITY ENGINEER

SHT 1 OF 1

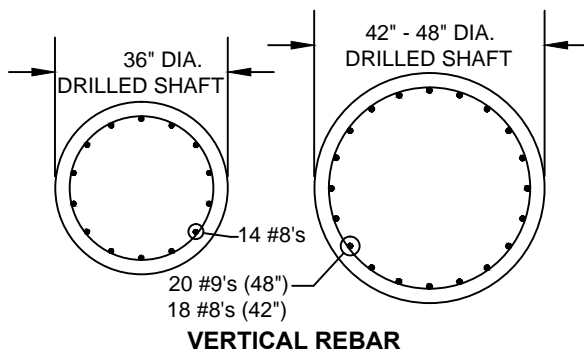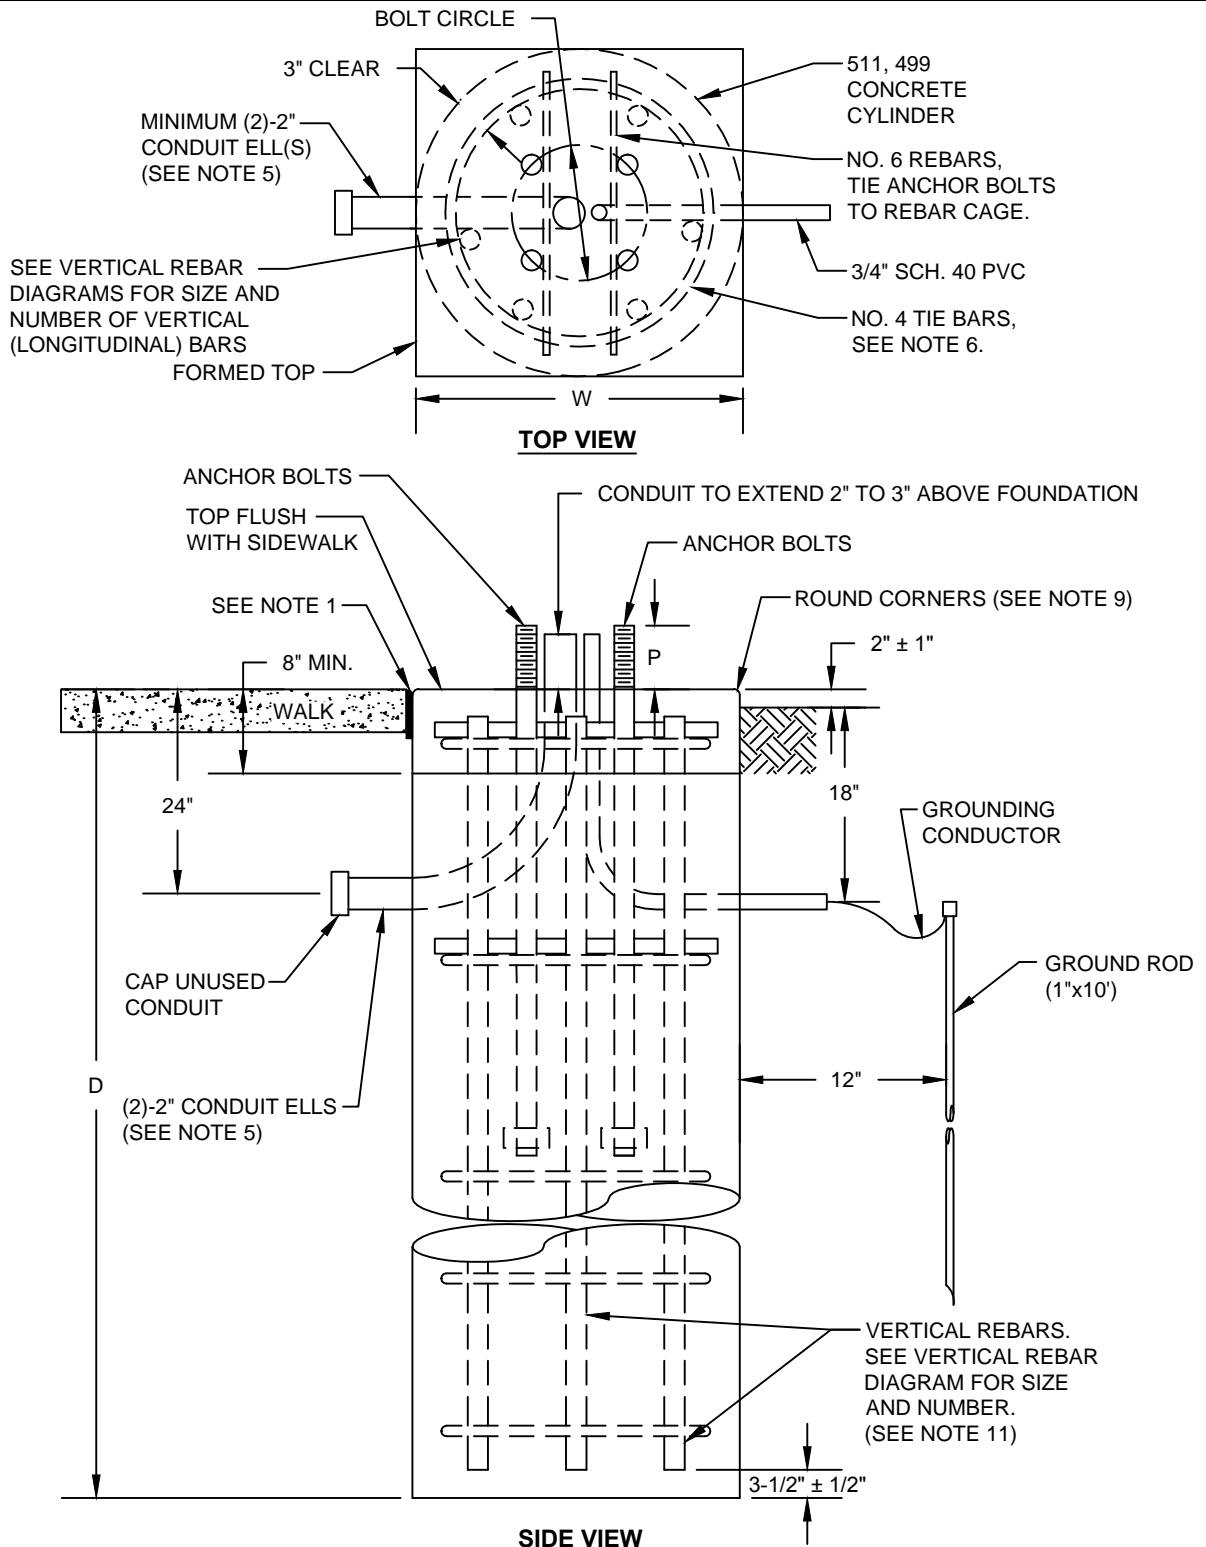

SIGNAL SUPPORT/ STRAIN POLE FOUNDATIONS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4160


10/01/2018

CITY ENGINEER

SHT 1 OF 3

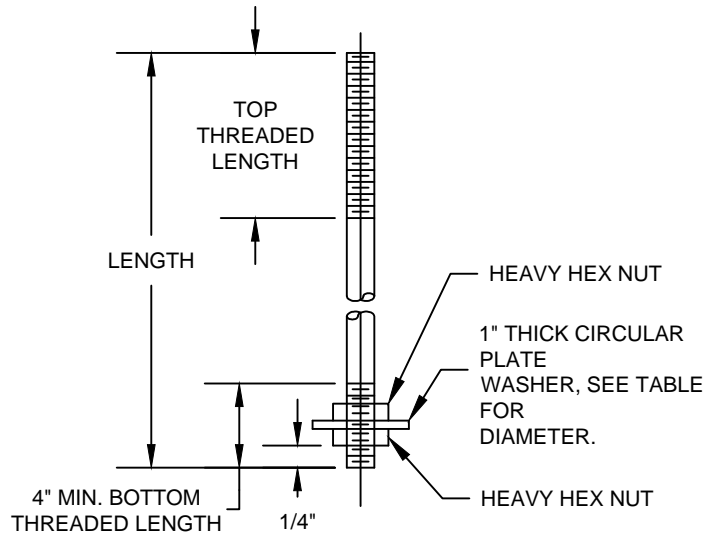

**HEX NUT ANCHOR
BOLT OPTION**

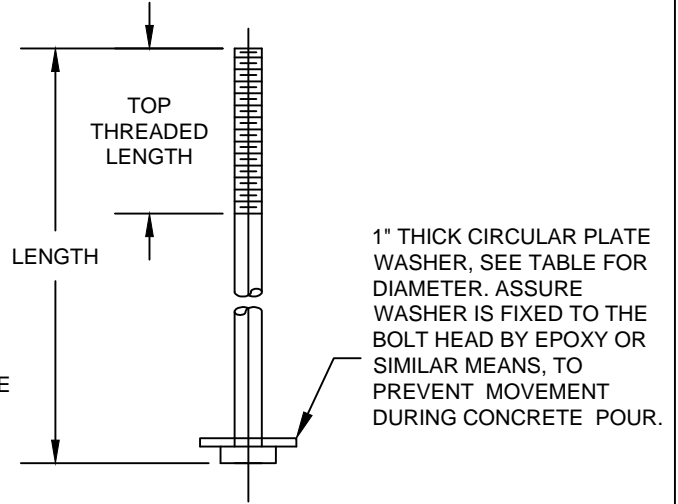

**HEADED ANCHOR
BOLT OPTION**

ANCHOR BOLTS

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED

CITY OF COLUMBUS 4120 & 4121 TYPE SUPPORTS					
DESIGN NO.	D (feet)	W	ANCHOR BOLTS		
			SIZE	CIRCLE	P
4	10	36	1.75 X 62	18	7.75
12	11	36	2 X 62	20	8.5
13	15	36	2 X 62	22	8.5
14	15	36	2 X 62	22	8.5
C15	15	36	2 X 62	24	8.5
C16	15	36	2 X 62	22	8.5

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED

DIA.	TOP THREAD LENGTH	THREADS PER INCH	PLATE WASHER DIAMETER
1.25	8	7	3
1.5	9	6	3
1.75	9	5	4
2	9	4.5	4
2.25	10	4.5	5
2.5	10	4	5
3	12	4	6

CITY OF COLUMBUS 4170 TYPE SUPPORTS

DESIGN NO.	D (feet)	W	ANCHOR BOLTS		
			SIZE	CIRCLE	P
5	9	36	1.75 X 62	16	7.75
6	9	36	1.75 X 62	16	7.75
7	10	36	2 X 62	18	8.5
8	10	36	2 X 62	20	8.5
9	10	36	2 X 62	22	8.5
10	11	36	2.25 X 63	22	9
11	11	36	2.25 X 63	22	9
12	12	36	2.5 X 64	23.5	9.75
13	16	42 or 48	3 X 66	26	11.75
14	17	48	3 X 72	34	11.75

**SIGNAL SUPPORT/
STRAIN POLE
FOUNDATIONS**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4160**

CITY ENGINEER

10/01/2018

SHT 2 OF 3

NOTES:

1. USE 1/2" PREFORMED JOINT FILLER AS PER 705.03 BETWEEN FOUNDATIONS AND ADJACENT PAVED AREAS.
2. A SPECIAL FOUNDATION DESIGN WILL BE REQUIRED WHEN COHESIVE SOIL WITH UNDRAINED SHEAR STRENGTH OF LESS THAN 2000 LB/FT² OR GRANULAR SOIL WITH AN ANGLE OF INTERNAL FRICTION LESS THAN 30° AND A WET DENSITY LESS THAN 120 LB/FT³ IS ENCOUNTERED. THE CONTRACTOR SHALL NOTIFY THE ENGINEER WHEN THESE CONDITIONS ARE IDENTIFIED.
3. PROVIDE ALL ANCHOR BOLTS WITH STANDARD STEEL HEX NUTS, LEVELING NUTS, AND PLAIN WASHERS. THE NUTS SHALL BE CAPABLE OF DEVELOPING THE FULL STRENGTH OF THE ANCHOR BOLTS.
4. AT LOCATIONS WHERE THE EXISTING SLOPE IS 6:1 OR GREATER, THE BURIED DEPTH OF FOUNDATION SHALL APPLY TO THE LOW SIDE OF THE SLOPE. SET THE TOP OF THE FOUNDATION 2" ABOVE THE EXISTING SURFACE ON THE HIGH SIDE OF THE SLOPE. THE ADDITIONAL DEPTH OF FOUNDATION NECESSARY TO MEET THESE REQUIREMENTS SHALL BE ADDED TO THE FORMED TOP.
5. THE SIZE, NUMBER (MINIMUM OF 2), TYPE, AND ORIENTATION OF CONDUIT ELLS SHALL BE AS SHOWN IN THE PLAN, EXCEPT THAT A 3/4" SCHEDULE 40 PVC CONDUIT SHALL BE INSTALLED IN EACH FOUNDATION. UNUSED CONDUIT ELLS SHALL BE CAPPED.
6. TIE SPACING, STARTING FROM THE TOP OF THE DRILLED SHAFT, SHALL BE 3" BETWEEN THE FIRST TWO TIES AND 12" SPACING THEREAFTER.
7. THE ANCHOR BASE POLE FOUNDATION SIDES SHALL BE ORIENTATED PARALLEL TO THE SIDEWALK OR BACK-OF-CURB OR EDGE-OF-PAVEMENT.
8. THE TOP OF THE FOUNDATION SHALL BE SET BASED ON THE FOLLOWING GUIDELINES:

FOUNDATION LOCATED ENTIRELY IN WALK OR CONCRETE AREA
 TOP OF FOUNDATION SHALL BE AS PER CITY OF COLUMBUS STANDARD DRAWING 4161.

FOUNDATION LOCATED BEHIND CURB ASSOCIATED WITH CURB RAMP
 TOP OF FOUNDATION SHALL BE FLUSH WITH TOP OF CURB AT BACK OF RAMP FOR A PARALLEL RAMP.

FOUNDATION LOCATED ADJACENT TO WALK OR CONCRETE AREA
 TOP OF FOUNDATION SHALL BE FLUSH WITH WALK OR CONCRETE AREA FOR A PERPENDICULAR RAMP.

FOUNDATION LOCATED ADJACENT TO WALK OR CONCRETE WITH STEEP GRADE CHANGE (RISES STEEPLY BEHIND WALK)
 THE BACK SIDE OF THE FOUNDATION SHALL MATCH THE GROUND SLOPE AND THE STREET SIDE OF THE FOUNDATION SHALL BE ABOVE THE SIDEWALK OR CONCRETE AREA AND COMPLETELY OUT OF THE SIDEWALK OR CONCRETE AREA.
9. THE POLE FOUNDATION TOP SHALL BE EDGED USING A 1/2" SIDEWALK EDGER AND NOT CHAMFERED.
10. ANCHOR BOLT LENGTH SHALL BE INCREASED WHEN FOUNDATION IS INSTALLED IN BRICK SIDEWALK. SEE CITY OF COLUMBUS STANDARD DRAWING 4161 AND 2301 FOR INCREASED LENGTH REQUIREMENTS.
11. ALL REINFORCING STEEL SHALL BE EPOXY COATED AND COMPLY WITH AND BE PLACED IN ACCORDANCE WITH CMSC 509. REBAR CAGE SHALL EXTEND TO WITHIN 3 1/2" ± 1/2" OF TOP AND BOTTOM OF FOUNDATION.
12. IF SHALLOW BEDROCK IS ENCOUNTERED, THE FOUNDATION LENGTH MAY BE DECREASED BY EMBEDDING THE SHAFT A MINIMUM OF 5 FT INTO BEDROCK. FIELD CUT THE VERTICAL REBAR TO FIT THE SHORTENED FOUNDATION.
13. IF EXCAVATING WITHIN 8 FEET OF, BUT GREATER THAN 5 FEET FROM THE EDGE OF AN EXISTING SIGNAL SUPPORT OR STRAIN POLE FOUNDATION, PROVIDE TEMPORARY SUPPORT OF THE POLE (DOWN GUY, HEAD GUY, BASE GUY, MECHANICAL/Crane SUPPORT, ETC.) DURING EXCAVATION AND CONSTRUCTION ACTIVITIES.
14. IF A UTILITY IS WITHIN 5 FEET OF THE FOUNDATION, INCREASE THE FOUNDATION LENGTH (D) TO THE LENGTH SHOWN IN THE TABLE BELOW.

4120 & 4121 TYPE SUPPORTS			4170 TYPE SUPPORTS		
DESIGN NO.	DEPTH OF ADJACENT UTILITY EXCAVATION		DESIGN NO.	DEPTH OF ADJACENT UTILITY EXCAVATION	
	3 FT	6 FT		3 FT	6 FT
4	D=18	D=22	5	D=15	D=19
12	D=18	D=22	6	D=15	D=19
13	D=18	D=22	7	D=15	D=19
14	D=18	D=22	8	D=15	D=19
C15	D=18	D=22	9	D=15	D=19
C16	SEE BELOW		10	D=15	D=19
SPECIAL FOUNDATION REQUIRED FOR UTILITY EXCAVATIONS ADJACENT TO C16.			11	D=20	D=24
			12	D=20	D=24
			13	D=20	D=24
			14	D=20	D=24

SIGNAL SUPPORT/ STRAIN POLE FOUNDATIONS

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION




CITY ENGINEER

STD DWG
4160

10/01/2018

SHT 3 OF 3

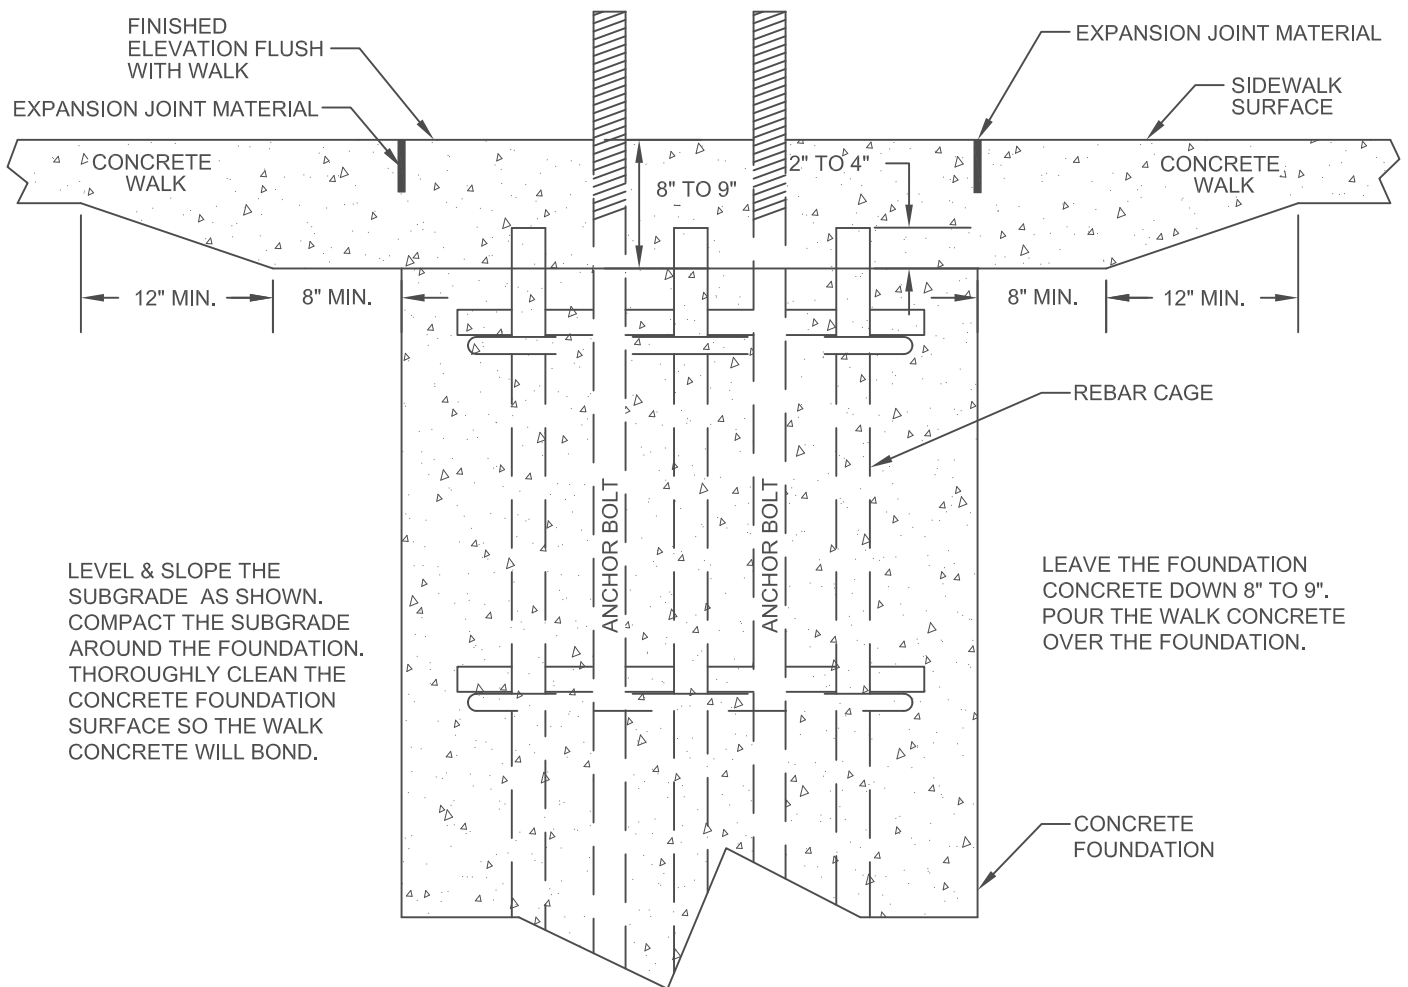

LEVEL & SLOPE THE SUBGRADE AS SHOWN. COMPACT THE SUBGRADE AROUND THE FOUNDATION. THOROUGHLY CLEAN THE CONCRETE FOUNDATION SURFACE SO THE WALK CONCRETE WILL BOND.

LEAVE THE FOUNDATION CONCRETE DOWN 8" TO 9". POUR THE WALK CONCRETE OVER THE FOUNDATION.

NOTE:

WHEN POURING WALK, EMBED 1/2" THICK EXPANSION JOINT FILLER (CMSC 608.03C AND 705.03). FORM A 3'x3' SQUARE (STRAIN POLE AND MAST ARM POLE FOUNDATION) OR 2'x2' SQUARE (PEDESTAL POLE FOUNDATION) AND CENTER THE JOINT FILLER AROUND THE FOUNDATION AS DIRECTED BY THE ENGINEER. ORIENT THE EXPANSION JOINTS PARALLEL TO OTHER GEOMETRIC LINES.

POLE FOUNDATION IN SIDEWALK AREA

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahra

CITY ENGINEER

STD DWG
4161

8/01/2015

SHT 1 OF 2

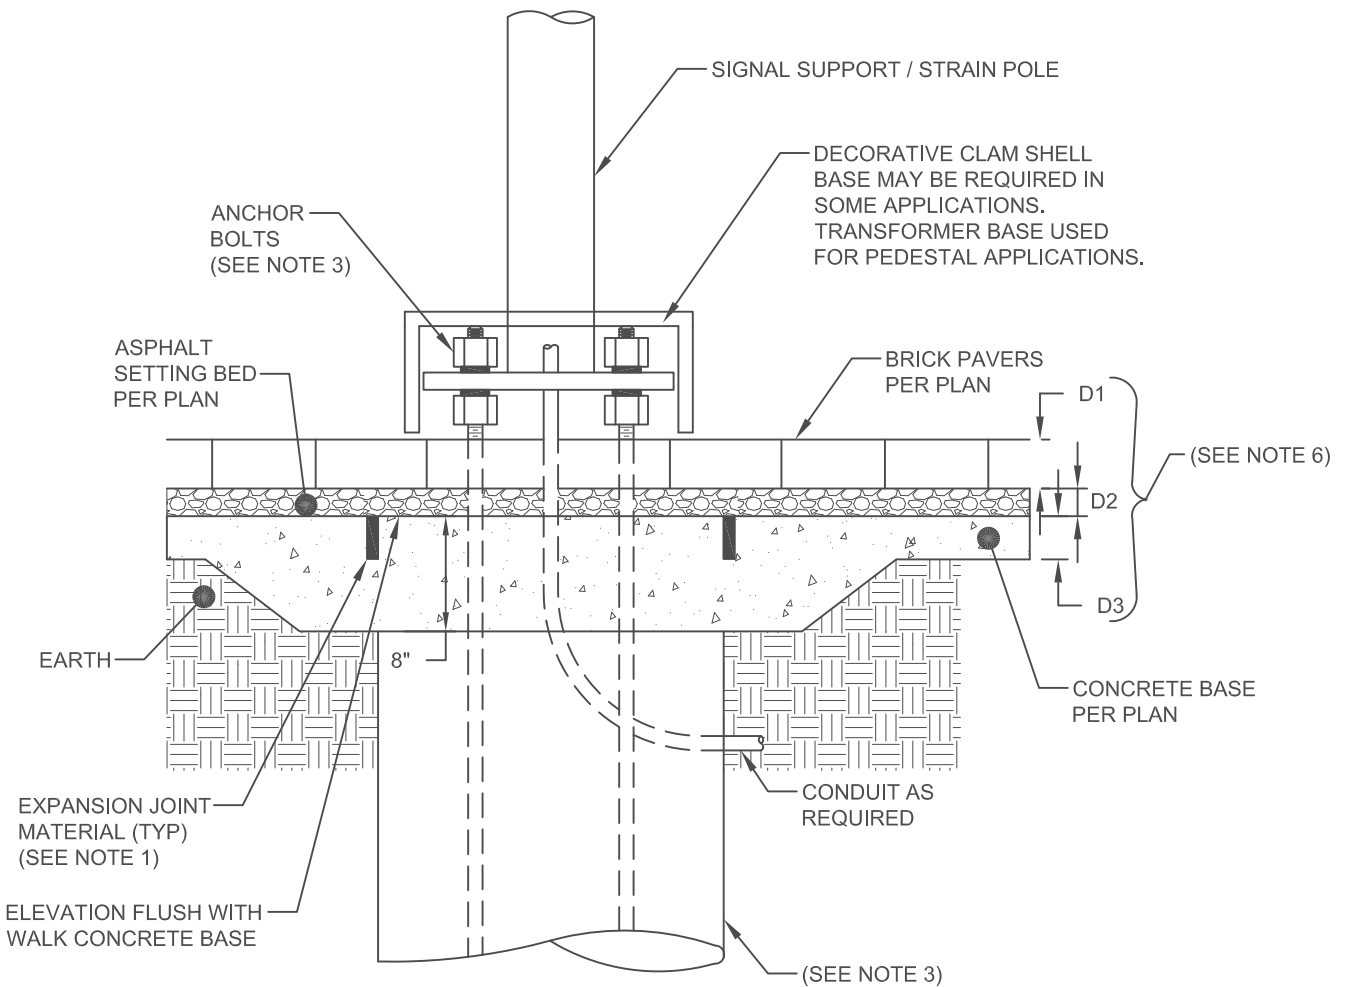

NOTES:

1. WHEN POURING THE CONCRETE WALK BASE, EMBED 1/2" THICK EXPANSION JOINT FILLER (608.03C AND 705.03). FORM A 3'x3' SQUARE (STRAIN POLE AND MAST ARM POLE FOUNDATION) OR 2'x2' SQUARE (PEDESTAL POLE FOUNDATION) AND CENTER THE JOINT FILLER AROUND THE FOUNDATION AS DIRECTED BY THE ENGINEER. ORIENTATE THE FILLER SQUARE PARALLEL TO OTHER GEOMETRIC LINES.
2. REBAR CAGE NOT SHOWN FOR CLARITY.
3. ANCHOR BOLT EMBEDMENT DEPTH SHALL BE AS PER CITY OF COLUMBUS STANDARD DRAWINGS 4160/4163 AND SHALL BE MEASURED FROM THE TOP OF THE CONCRETE BASE SURFACE. ANCHOR BOLT EXPOSURE THROUGH THE ASPHALT SETTING BED AND BRICK AREA SHALL NOT BE CONSIDERED PART OF THE EMBEDMENT DEPTH. ANCHOR BOLT LENGTH SHALL BE INCREASED TO COMPENSATE FOR D1 AND D2.
4. LEVEL & SLOPE THE SUBGRADE AS SHOWN. COMPACT THE SUBGRADE AROUND THE FOUNDATION. THOROUGHLY CLEAN THE CONCRETE FOUNDATION SURFACE SO THE CONCRETE WALK BASE WILL BOND.
5. LEAVE THE FOUNDATION CONCRETE DOWN 8". POUR THE CONCRETE WALK BASE OVER THE LOWERED FOUNDATION.
6. PAVER AND SETTING BED DIMENSIONS SHALL BE PER CITY OF COLUMBUS STANDARD DRAWING 2301 OR PER PLAN.

POLE FOUNDATION IN SIDEWALK AREA


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4161

8/01/2015

SHT 2 OF 2

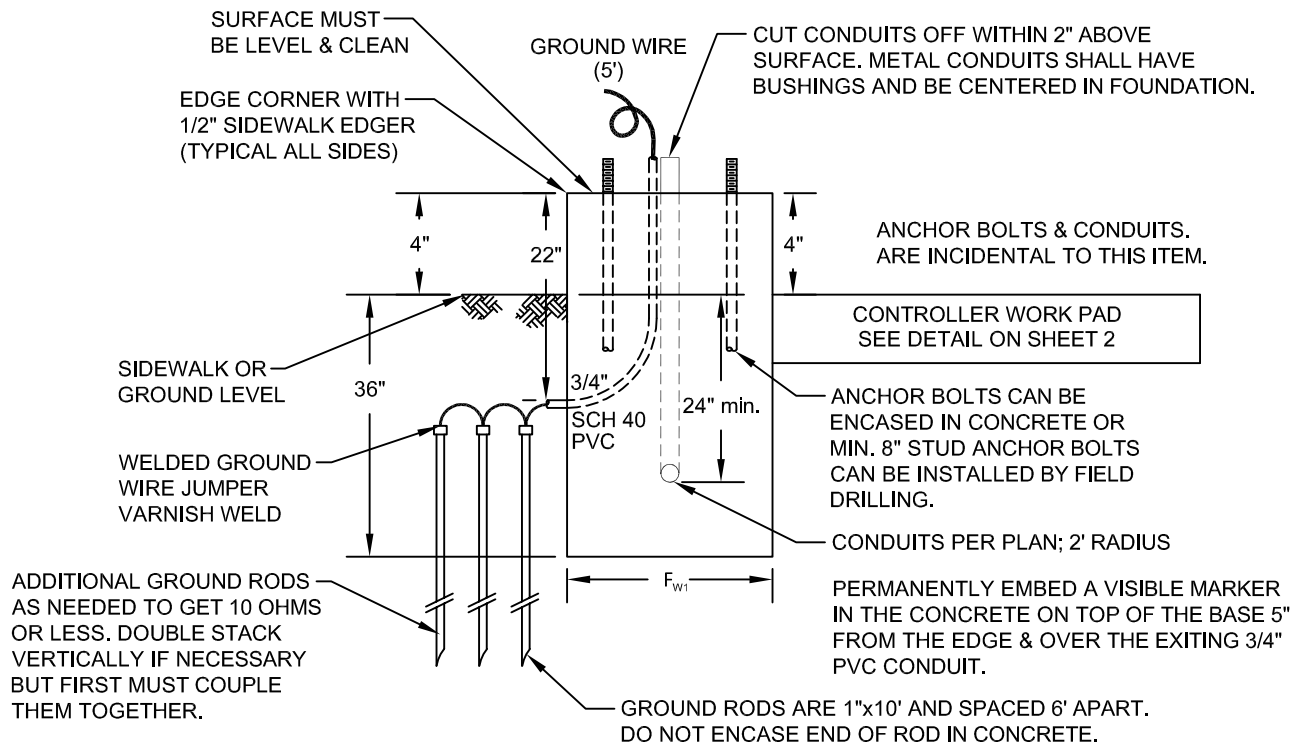

NOTE:

USE EXPANSION MATERIAL BETWEEN THE BASE CONCRETE & OTHER CONCRETE AREAS.

TRAFFIC SIGNAL CONTROLLER CABINET FOUNDATION

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4162


07/01/2020

CITY ENGINEER


SHT 1 OF 2

CONTROLLER CABINET AND FOUNDATION DIMENSIONS


	M36 STRETCH (IN.)	SIZE 6 CABINET (IN.)	P-UPS CABINET (#1) (IN.)	P-UPS CABINET (#2) (IN.)
C_D = CABINET DEPTH	17	26	26	29
C_W = CABINET WIDTH	36	44	60	58
F_{W1} = FOUNDATION WIDTH 1	*	30	30	33
F_{W2} = FOUNDATION WIDTH 2	*	48	64	62
W_{PW1} = WORK PAD WIDTH 1	36	36	36	36
W_{PW2} = WORK PAD WIDTH 2	36	48	64	98
W_{PW3} = WORK PAD WIDTH 3	N/A	N/A	N/A	69
WORK PAD DEPTH	4	4	4	4
*Pole mounted cabinet (no foundation)				

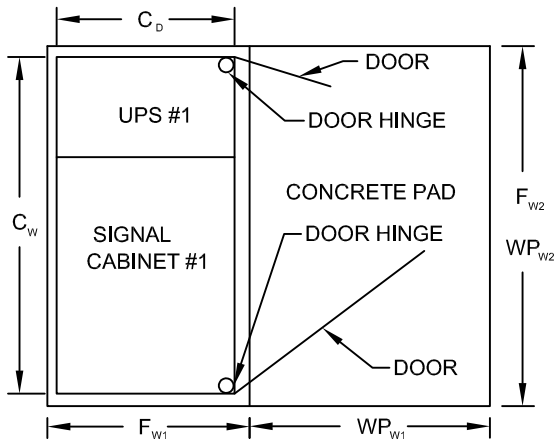


**UPS CABINET FOUNDATION / WORK PAD
TYPE 1**

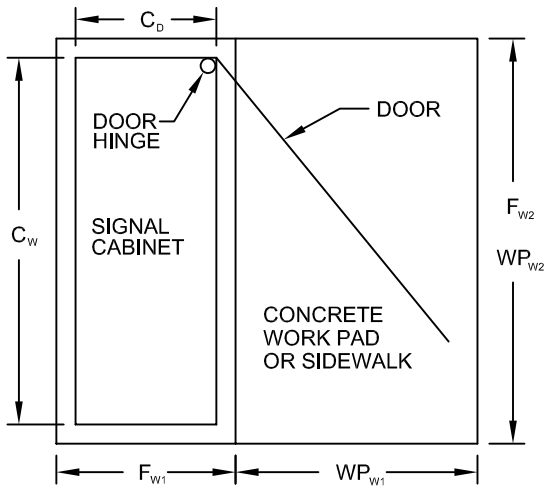

**SIZE 6 CABINET
FOUNDATION / WORK PAD**

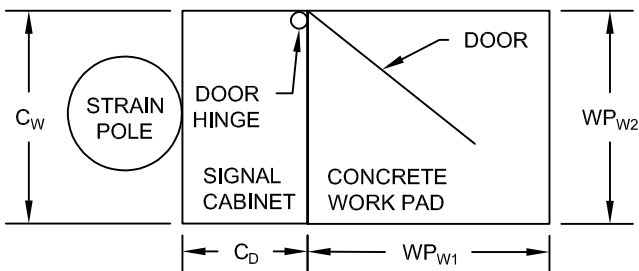

**M36 STRETCH CABINET
WORK PAD**

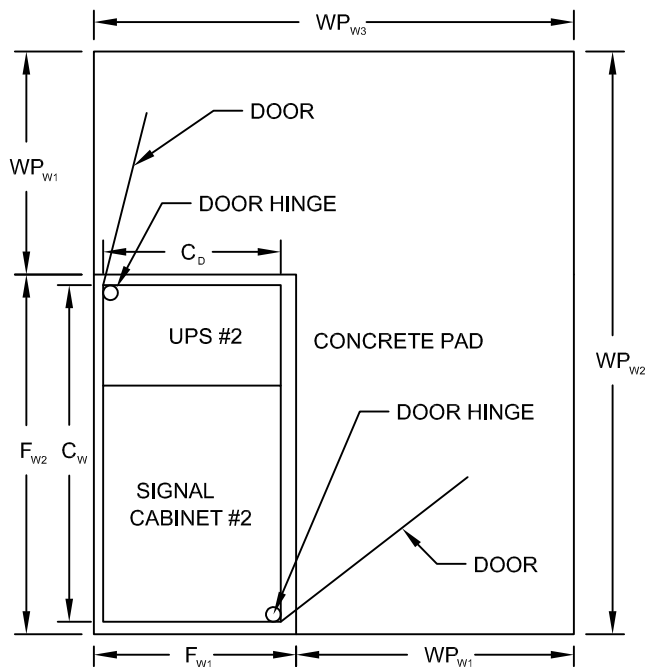

**UPS CABINET FOUNDATION / WORK PAD
TYPE 2**

NOTE:

BUILD-UP/STABILIZATION OF SURROUNDING AREA MAY BE REQUIRED BY ENGINEER AND IS INCIDENTAL TO THE INSTALLATION. THIS APPLIES TO ALL SLOPED AREA INSTALLATIONS.

TRAFFIC SIGNAL CONTROLLER CABINET FOUNDATION

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION




**STD DWG
4162**

07/01/2020

SHT 2 OF 2

CITY ENGINEER

FOUNDATION DETAILS				
PEDESTAL TYPE (HT.)	DEPTH (D)	BOLT CIRCLE	REBAR REQUIRED	ANCHOR BOLT (DIA.)
STD. DWG 4100 (5')	3'	14.5"	NO	1"
STD. DWG 4101 (10.7')	3'	14.5"	NO	1"
STD. DWG 4102 (12.7')	4'	14.5"	YES	1"
STD. DWG 2187 (15.1')	4'	14.5"	YES	1"
STD. DWG 4103 (17.5')	4'	14.5"	YES	1"
STD. DWG 4104 (21')	4'	14.5"	YES	1"
STD. DWG 4106 (10.7' DECORATIVE)	4'	9.5"	NO	1"

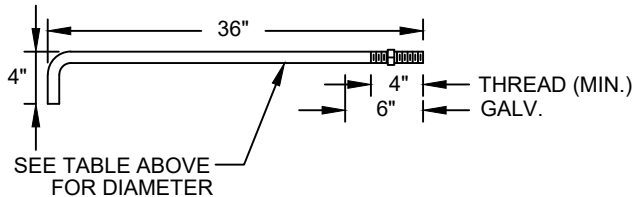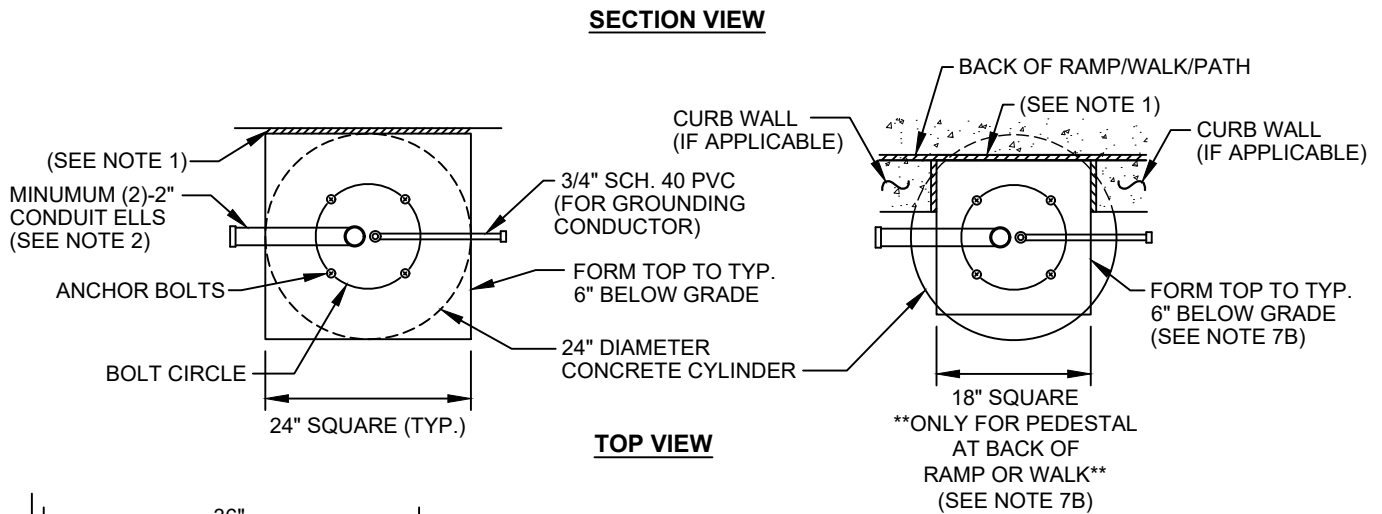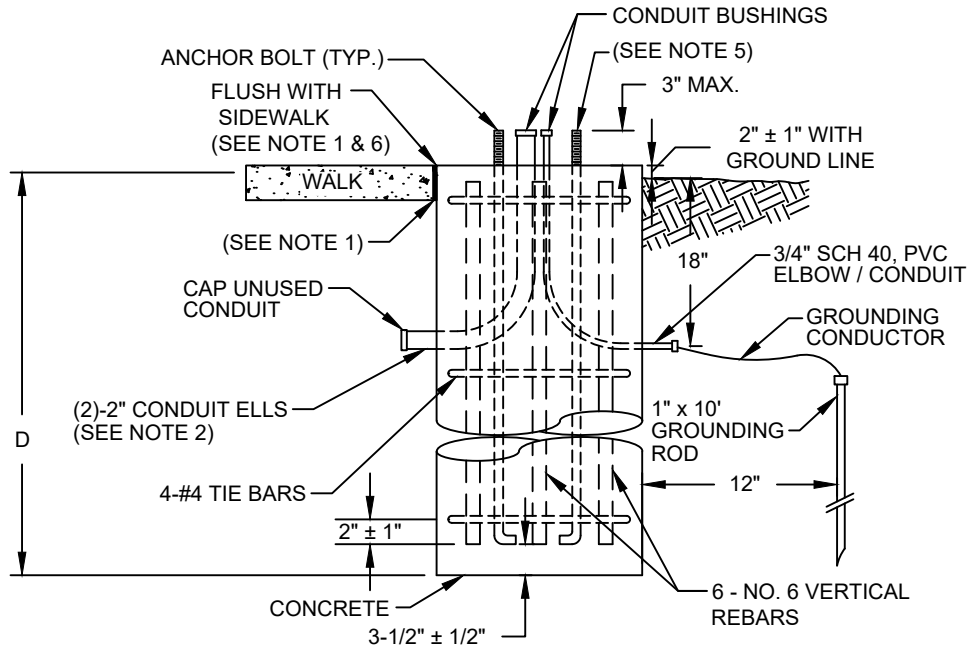

PEDESTAL ANCHOR BOLT
ANCHOR BOLT PROJECTS 2.75" ABOVE BASE

- (4) 36"-8 NC GALV STEEL ANCHOR BOLTS, ASTM F1554 GR55, TOP 10" GALV PER ASTM A153, "L" SHAPED (4"L)
- (4) 8 NC GALV STEEL HEX NUTS
- (4) GALV STEEL LOCKWASHERS

PEDESTAL FOUNDATION

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4163

07/01/2021

CITY ENGINEER

SHT 1 OF 2

NOTES:

1. 1/2" PREFORMED JOINT FILLER AS PER 608.03C SHALL BE USED BETWEEN FOUNDATIONS AND ADJACENT PAVED OR CONCRETE AREAS.
2. THE TYPE, SIZE, NUMBER (MINIMUM OF 2) AND ORIENTATION OF CONDUIT ELLS SHALL BE AS SHOWN IN THE PLAN, EXCEPT THAT A 3/4" SCHEDULE 40 PVC CONDUIT SHALL BE INSTALLED IN EACH FOUNDATION. UNUSED CONDUIT ELLS SHALL BE CAPPED.
3. THE SIZE, NUMBER AND LOCATION OF ANCHOR BOLTS SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
4. ALL PEDESTALS SHALL BE PROVIDED WITH A METHOD OF SECURELY ATTACHING A 4 AWG INSULATED COPPER GROUNDING CONDUCTOR TO THE PEDESTAL OR ANCHOR BOLT. NO CABLES OR CONNECTIONS SHALL BE EXTERNAL TO THE PEDESTAL.
5. THE PEDESTAL BASE SHALL SET ON THE FOUNDATION TOP WITHOUT GROUTING, PREFORMED FILLERS OR LEVELING NUTS UNDER THE BASE. STAINLESS STEEL SHIMS MAY BE USED UNDER THE BASE FOR LEVELING THE INSTALLATION.
6. THE FOUNDATION AREA OF CONTACT WITH THE PEDESTAL BASE SHALL BE LEVEL. IF ADJACENT PAVED AREAS SLOPE, THE REMAINDER OF THE FOUNDATION TOP SHALL BE BEVELED TO MEET THE ADJACENT ELEVATIONS.
7. THE TOP OF THE FOUNDATION SHALL BE SET BASED ON THE FOLLOWING GUIDELINES:

A. FOUNDATION LOCATED ENTIRELY IN WALK OR CONCRETE AREA

TOP OF FOUNDATION SHALL BE AS PER CITY OF COLUMBUS STANDARD DRAWING 4161.

B. FOUNDATION LOCATED AT BACK OF RAMP AND/OR BEHIND WALK OR PATH

THE FORMED TOP SHALL BE 18"X18" SQUARE (APPLIES TO 5' AND 10.7' TALL PEDESTALS ONLY). THE TOP OF FOUNDATION SHALL BE FLUSH WITH ADJACENT WALK OR CONCRETE AREA. WHERE CURB WALL IS UTILIZED AT THE BACK OF WALK, THE TOP OF THE FOUNDATION SHALL BE FLUSH WITH THE TOP OF THE CURB WALL. THE FACE OF FOUNDATION ADJACENT TO THE BACK OF THE WALK SHALL MATCH THE PROFILE OF ADJACENT CURB WALL.

C. FOUNDATION LOCATED ADJACENT TO WALK OR CONCRETE AREA

TOP OF FOUNDATION SHALL BE FLUSH WITH WALK OR CONCRETE AREA.

D. FOUNDATION LOCATED ADJACENT TO WALK OR CONCRETE WITH STEEP GRADE CHANGE

THE BACK SIDE OF THE FOUNDATION SHALL MATCH THE GROUND SLOPE AND THE STREET SIDE OF THE FOUNDATION SHALL BE ABOVE THE SIDEWALK OR CONCRETE AREA AND COMPLETELY OUT OF THE SIDEWALK OR CONCRETE AREA.

PEDESTAL FOUNDATION


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4163

07/01/2021

SHT 2 OF 2

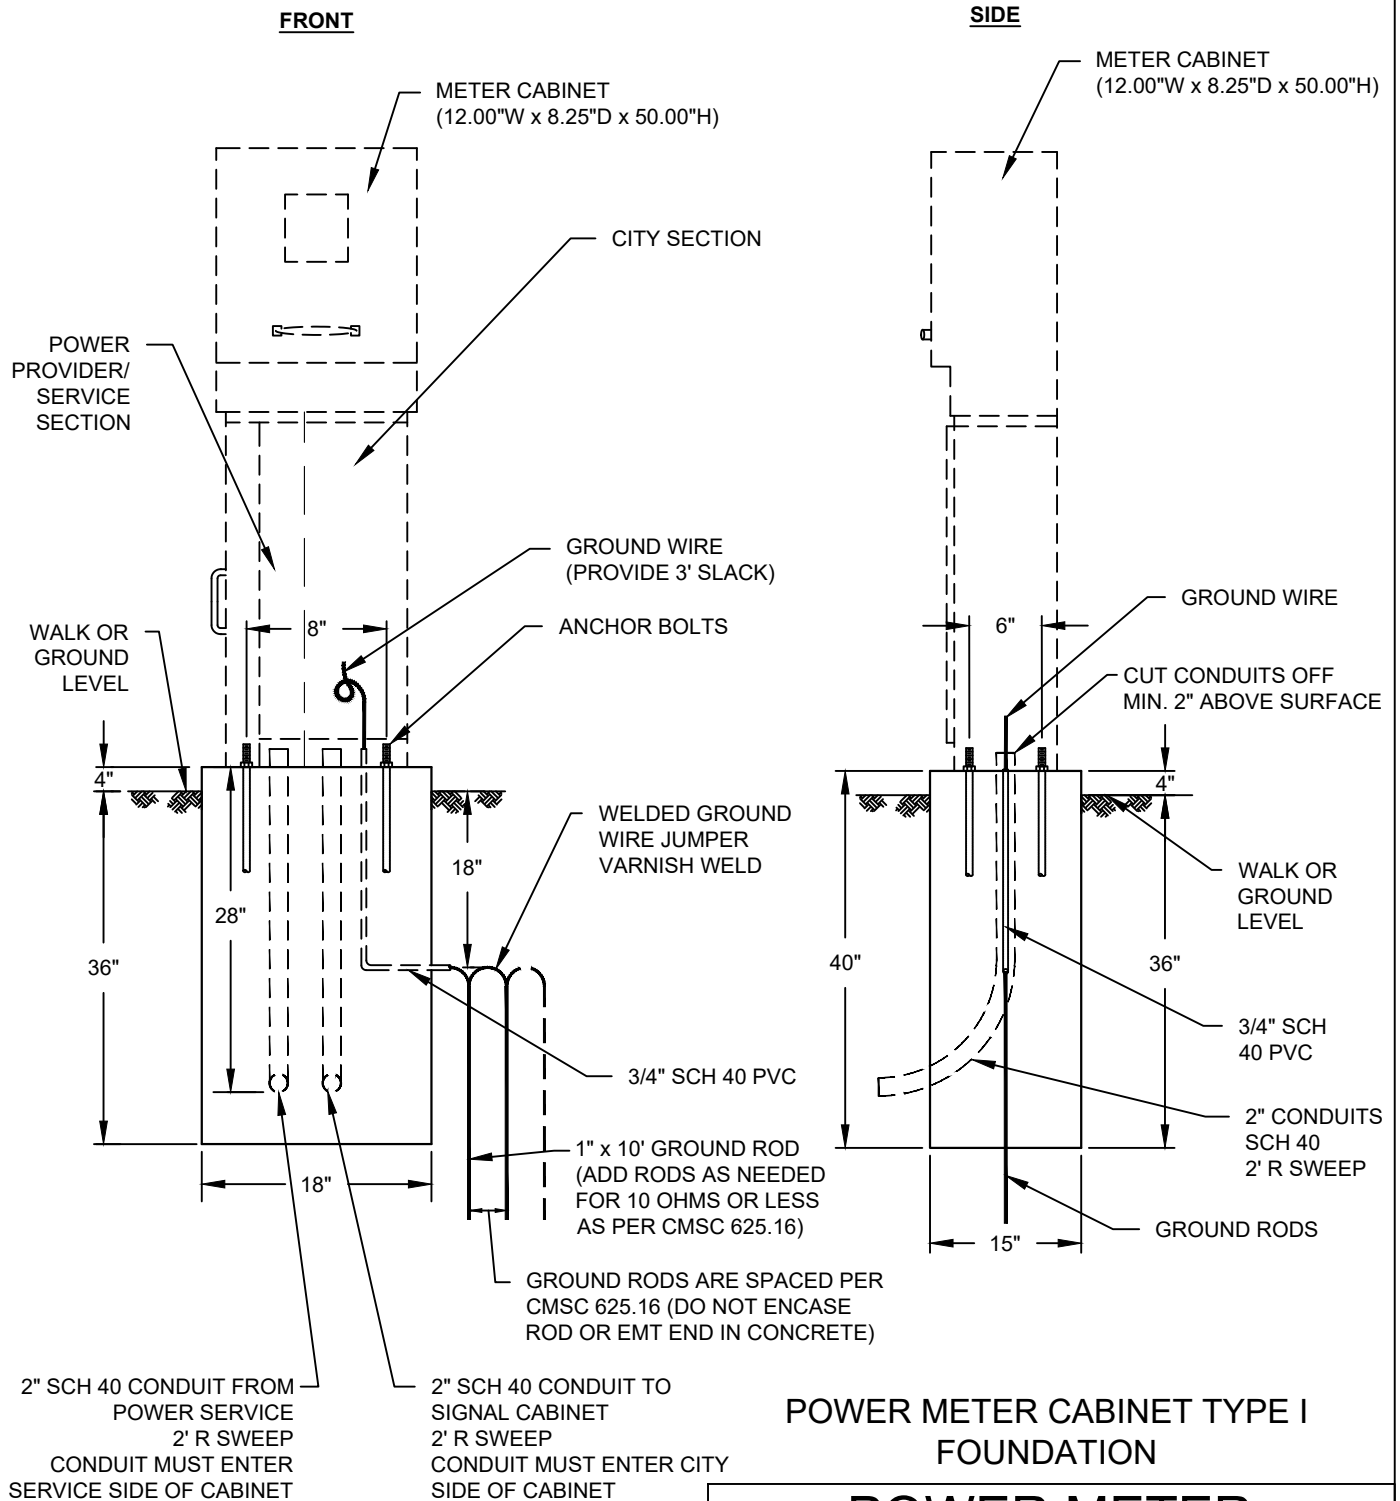

POWER METER CABINET TYPE I FOUNDATION

POWER METER CABINET AND FOUNDATION


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


CITY ENGINEER

STD DWG
4164

10/01/2020

SHT 1 OF 4

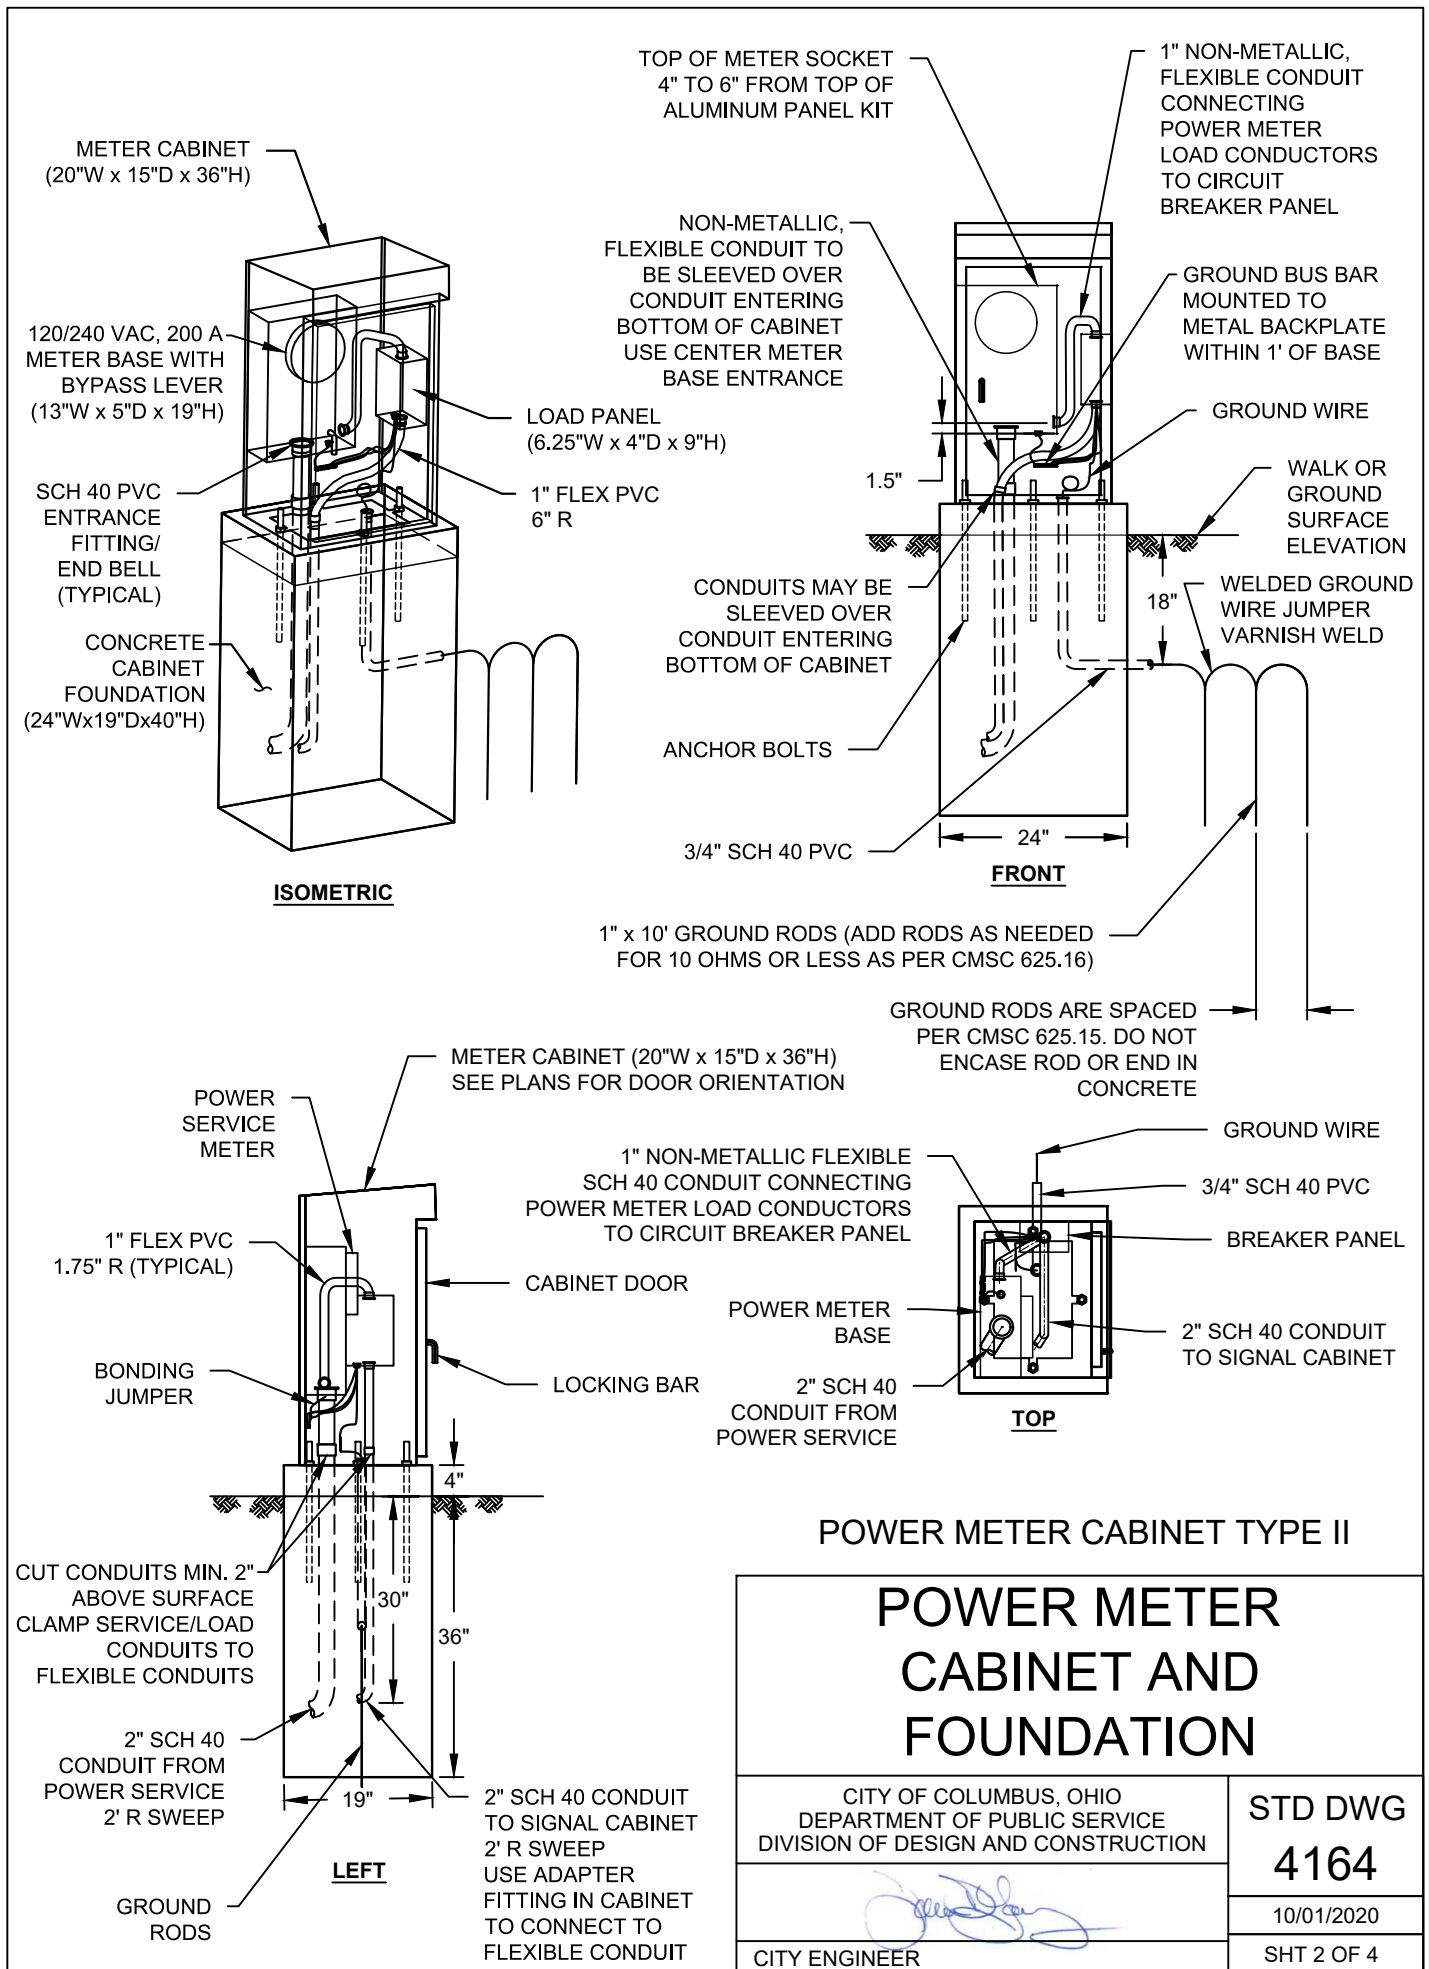

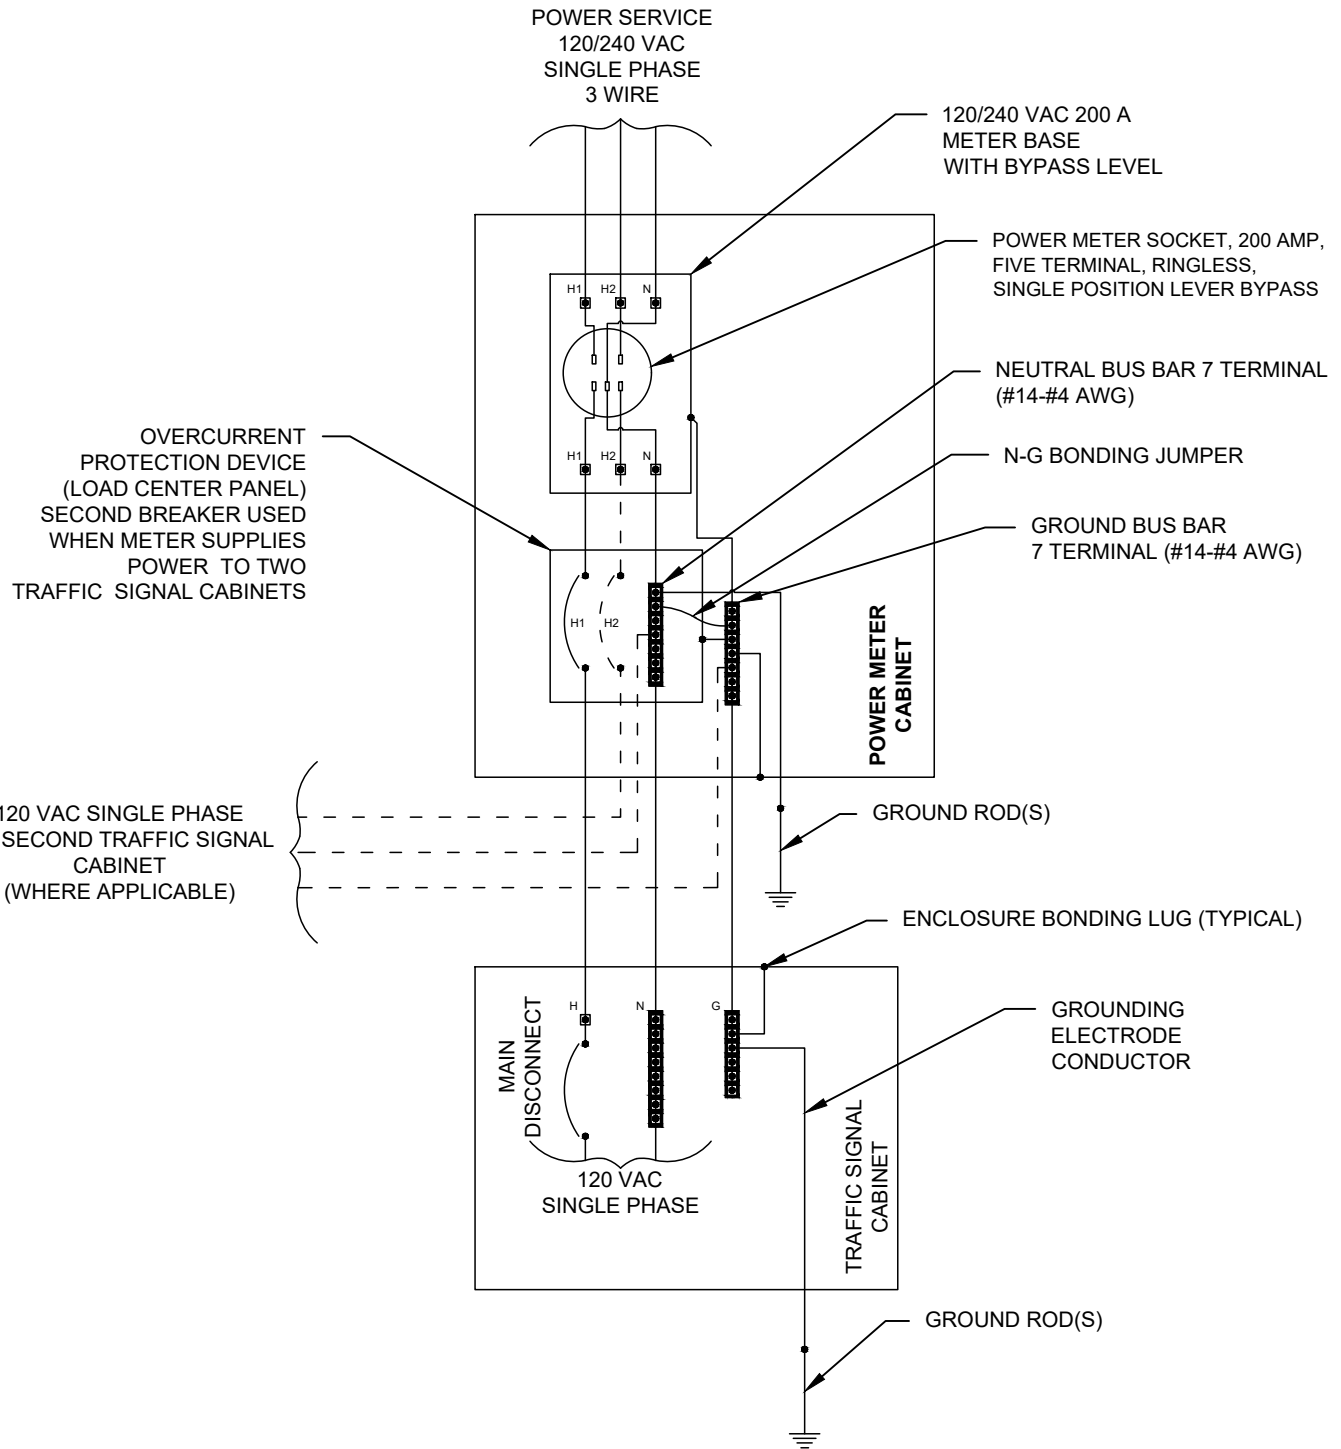

POWER SERVICE WIRING DETAILS

POWER METER CABINET AND FOUNDATION

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

4164

10/01/2020

SHT 3 OF 4

CITY ENGINEER

FOUNDATION NOTES:

1. USE EXPANSION MATERIAL BETWEEN FOUNDATION CONCRETE AND OTHER CONCRETE AREAS.
2. ANCHOR BOLTS AND CONDUITS ARE INCIDENTAL TO THIS PAY ITEM.
3. PERMANENTLY EMBED A VISIBLE MARKER ON TOP OF THE FOUNDATION 1" FROM THE EDGE AND CENTERED OVER THE EXITING 3/4" CONDUIT FOR GROUND WIRE.
4. FOUNDATION SURFACE SHALL BE LEVEL AND CLEAN.
5. ANCHOR BOLTS CAN BE ENCASED IN CONCRETE OR STUD ANCHORS CAN BE INSTALLED BY FIELD DRILLING.
6. FOUNDATION SHALL BE EDGED USING A 1/2" SIDEWALK EDGER.

WIRING NOTES:

1. A #4 WIRE LUG SHALL BE PROVIDED FOR ATTACHING A GROUNDING WIRE FROM A GROUND ROD. THE GROUNDING WIRE LUG SHALL BE CONNECTED TO THE NEUTRAL BUS BAR WITHIN THE LOAD CENTER ENCLOSURE.
2. THE NEUTRAL BUS BAR WITHIN THE LOAD CENTER SHALL BE BONDED TO THE GROUND BUS BAR, WHICH SHALL BE MOUNTED ON THE CABINET BACK PLATE WITHIN ONE FOOT OF THE CABINET FOUNDATION, DIRECTLY GROUNDING IT TO THE CABINET.
3. THE POWER METER SOCKET ENCLOSURE SHALL BE CONNECTED TO THE GROUND BUS BAR.

CABINET NOTES:

1. PROVIDE AN ARC FLASH HAZARD WARNING SIGN ON THE OUTSIDE OF THE FRONT DOOR OF THE CABINET IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE PARAGRAPH 110.16.
2. PROVIDE AN AVAILABLE FAULT CURRENT SIGN ON THE OUTSIDE OF THE FRONT DOOR OF THE CABINET IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE PARAGRAPH 110.24.

FOR TYPE I CABINETS:

1. THE CONTRACTOR SHALL LOCK THE METER CABINET'S HINGED METER SECTION AND THE CUSTOMER SECTION LIFT-OFF SERVICE COVER WITH PADLOCKS UNTIL ACCEPTED BY THE CITY, AT WHICH POINT THE CONTRACTOR SHALL REMOVE THE LOCKS AND THE CITY WILL PLACE THEIR LOCKS. THE POWER SERVICE SUPPLIER SHALL LOCK THE UTILITY SECTION LIFT-OFF SERVICE COVER.

FOR TYPE II CABINETS:

1. THE POWER METER CABINET SHALL BE A NEMA 3R, BASE-MOUNTED, LARGE SINGLE DOOR ENCLOSURE.
2. THE CABINET SHALL BE SUPPLIED WITH TWO (2) ADJUSTABLE "C" MOUNTING CHANNELS ON EACH SIDE WALL AND ON THE BACK WALL OF THE CABINET, AND THE CABINET SHALL BE SUPPLIED WITH AN ALUMINUM PANEL KIT THAT IS FULL HEIGHT OF THE CABINET.
3. THE POWER METER SOCKET SHALL BE MOUNTED TO THE PANEL KIT HORIZONTALLY IN THE POWER METER CABINET AND FOUR TO SIX INCHES FROM THE TOP.
4. THE LOAD CENTER PANEL SHALL BE A 60 AMP, TWO BREAKER, FOUR CIRCUIT CAPACITY ENCLOSURE WITH COVER AND DOOR INCLUDING 30 AMP, SINGLE POLE CIRCUIT BREAKERS REQUIRED AS PER PLAN WITH 10K AMP SHORT CIRCUIT CURRENT RATING.
5. THE LOAD CENTER PANEL SHALL BE MOUNTED TO THE RIGHT SIDE OF THE CABINET WALL.
6. THE CABINET MATERIAL SHALL BE 5052 MARINE GRADE, 0.125 INCH THICK ALUMINUM SHEETING WITH A 32 HARDNESS IN ITS NATURAL COLOR.
7. ALL EXTERIOR SEAMS SHALL BE EITHER CONTINUOUSLY WELDED, TACK WELDED, SEALED WITH A 15 TO 20 YEAR SILICONE SEALER, AND/OR OVERLAPPED SUCH THAT WATER DOES NOT ENTER THE CABINET. ALL CABINET EDGES SHALL BE SMOOTH (FREE OF ANY SHARP EDGES).
8. THE CABINET DOOR FRAME OPENING SHALL BE DOUBLE-FLANGED ON ALL FOUR SIDES. THE CABINET DOOR SHALL BE HINGED USING A HEAVY GAUGE CONTINUOUS HINGE THAT HAS A STAINLESS STEEL HINGE PIN. THE HINGE SHALL BE BOLTED TO THE CABINET SO THE DOOR CAN BE REMOVED.
9. THE BOLTS AND NUTS SHALL BE MADE OF STAINLESS STEEL, BE TAMPERPROOF AND SECURELY FASTENED TO PREVENT VIBRATIONS FROM LOOSENING THE NUTS.
10. THE DOOR, SEALED WITH A NEOPRENE GASKET, SHALL BE EQUIPPED WITH A THREE (3) POINT LATCHING MECHANISM AND A HANDLE WHICH CAN BE PADLOCKED. THE DOOR SHALL BE DESIGNED SUCH THAT THE DOOR CAN BE LOCKED IN AN OPEN POSITION AT 90, 135, AND 180 DEGREES (NOMINAL VALUES) TO THE CABINET FACE.
11. BOLT PATTERN SHALL CONSIST OF AN ANCHOR BOLT POSITIONED IN EACH CABINET CORNER.
12. THE POWER METER CABINET SHALL BE SUPPLIED WITHOUT A DOOR LOCK, SWITCH COMPARTMENT, AND POLICE DOOR ON THE CABINET DOOR.
13. A METAL BAR SHALL BE SUPPLIED THAT WILL FIT THROUGH THE LOCK HOLE ON THE HANDLE AND ALLOW TWO DIFFERENT PAD LOCKS THE ABILITY TO UNLOCK THE CABINET. THE CONTRACTOR SHALL INSTALL ITS LOCK ON ONE SIDE OF THE LOCKING BAR AND THE POWER SERVICE SUPPLIER SHALL LOCK THE OTHER SIDE UNTIL ACCEPTED BY THE CITY AT WHICH POINT THE CONTRACTOR SHALL REMOVE ITS LOCK AND THE CITY WILL PLACE THEIR LOCK.
14. ALL AC+ AND NEUTRAL CONDUCTORS SHALL BE INSTALLED IN FLEXIBLE NON-METALLIC CONDUIT TO PREVENT ACCIDENTAL CONTACT DURING MAINTENANCE WITHIN THE CABINET. ONLY GROUND CONDUCTORS MAY BE INSTALLED OUTSIDE OF CONDUIT.

POWER METER CABINET AND FOUNDATION

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION




CITY ENGINEER

STD DWG
4164

10/01/2020

SHT 4 OF 4

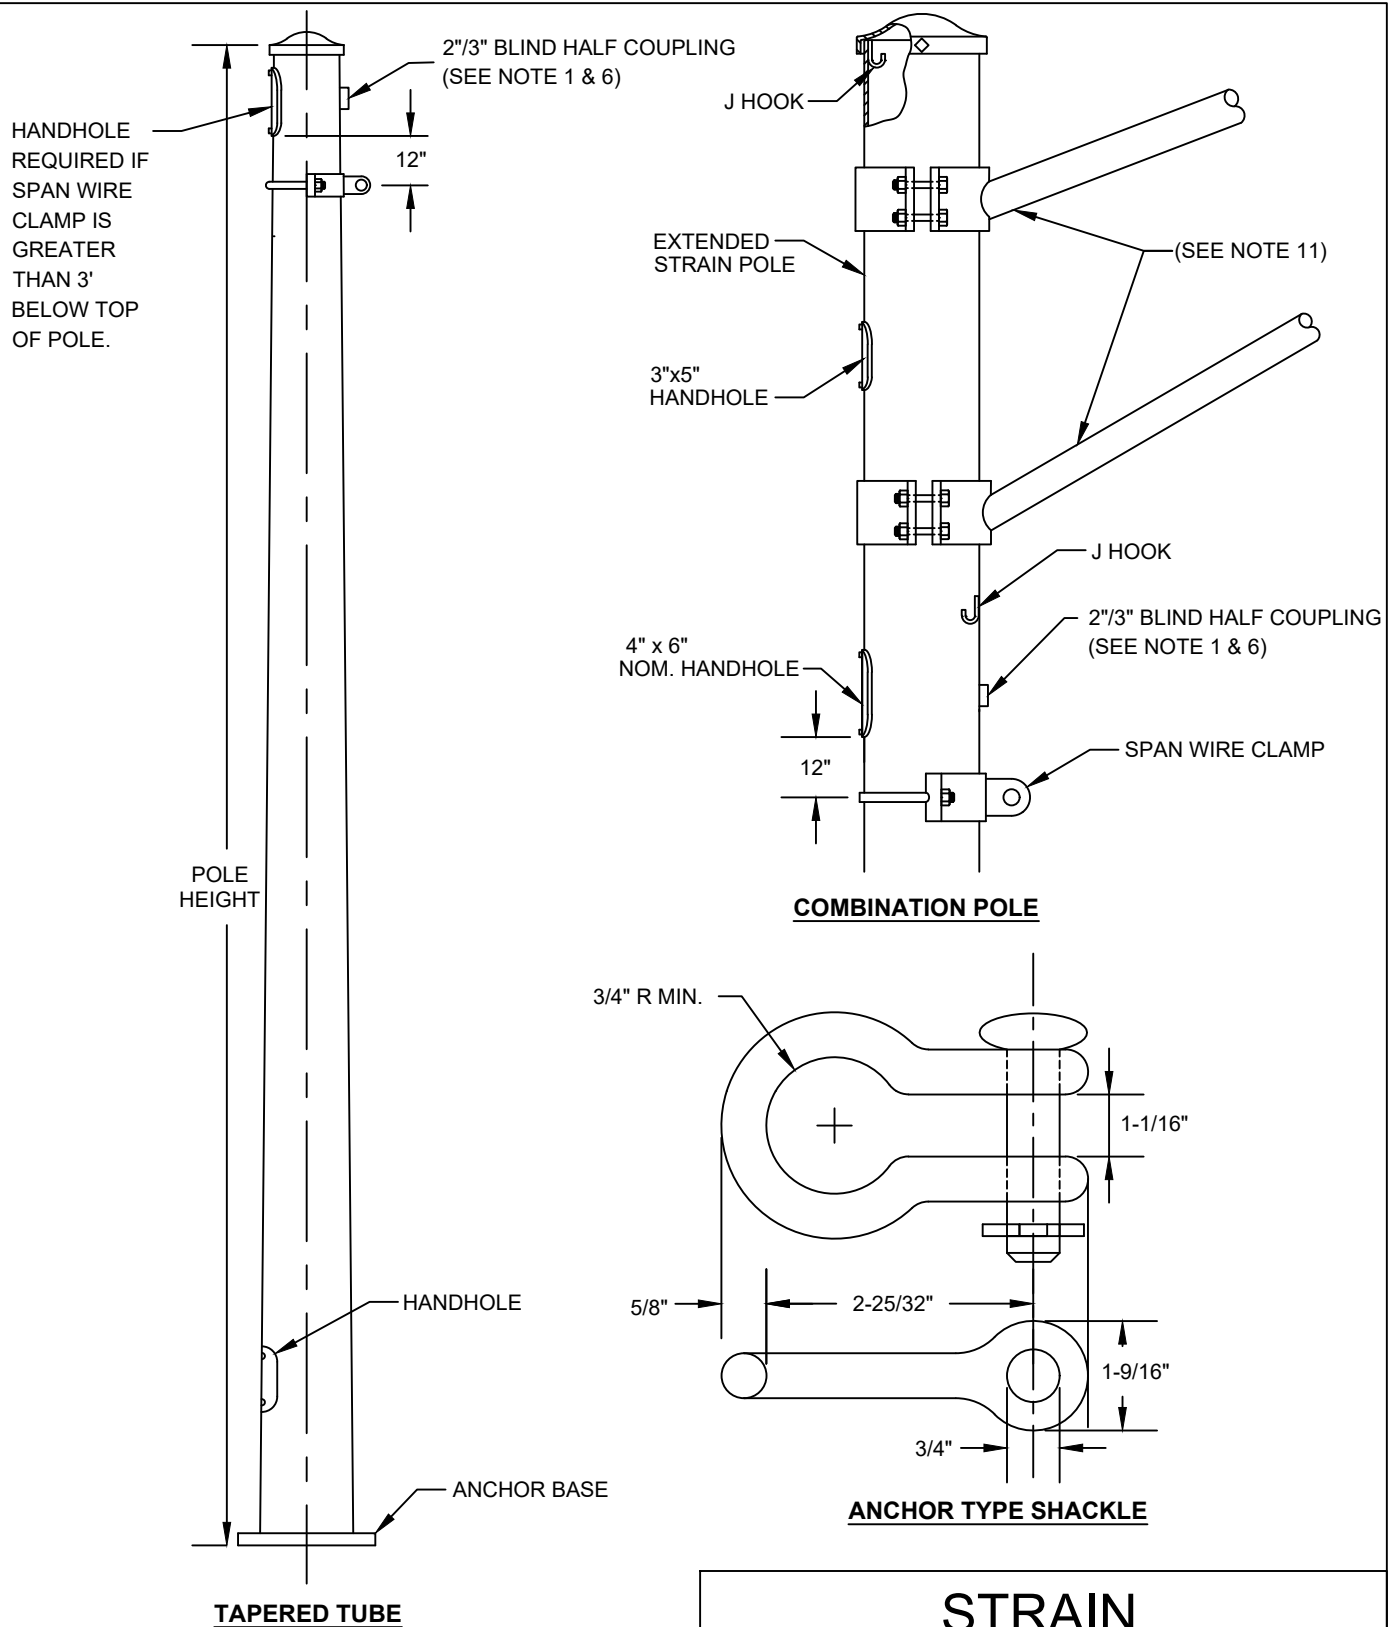

STRAIN POLE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4170

07/01/2021

CITY ENGINEER

SHT 1 OF 7

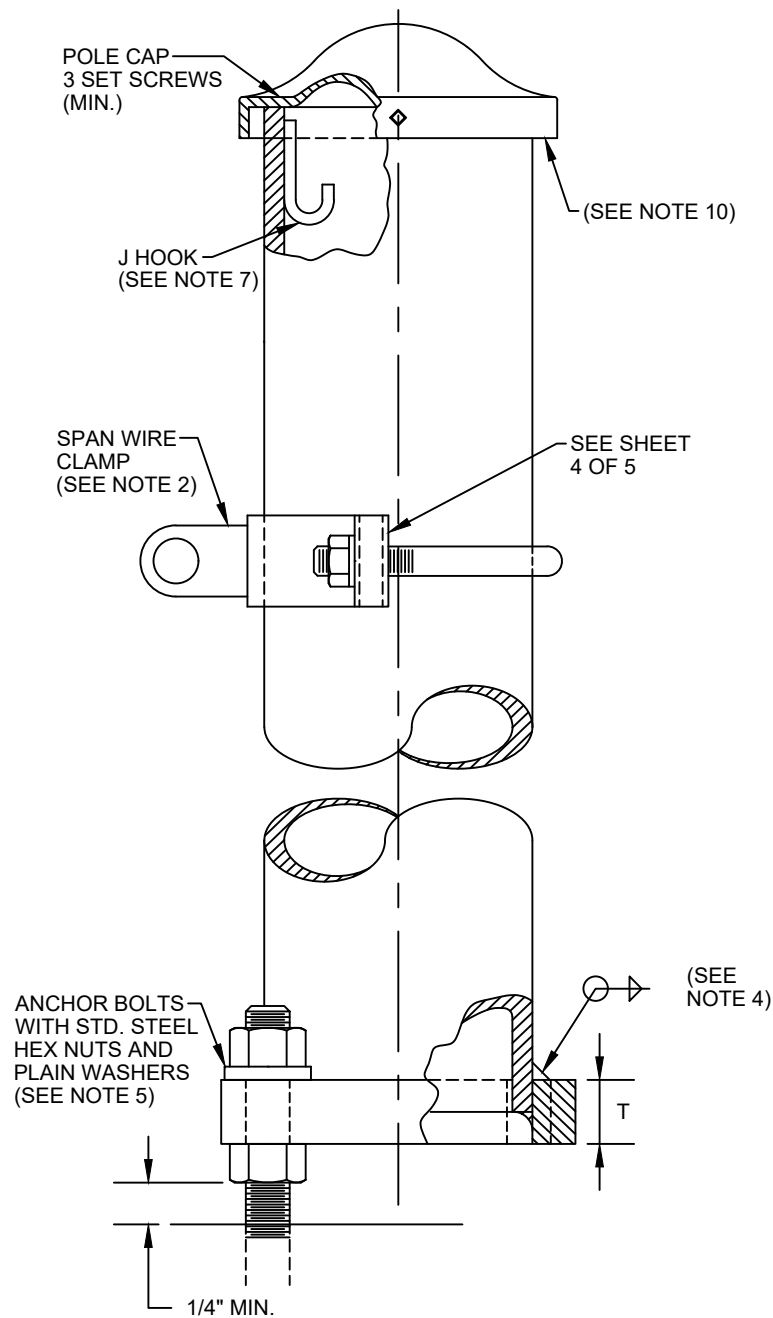

POLE DETAILS

STRAIN POLE




CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4170

07/01/2021

CITY ENGINEER

SHT 2 OF 7

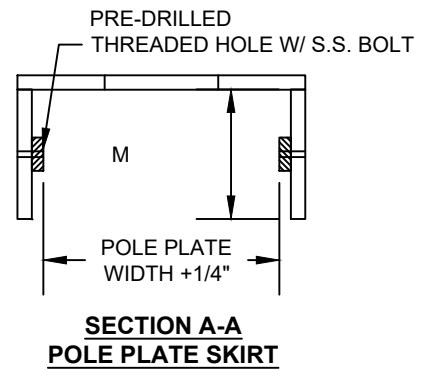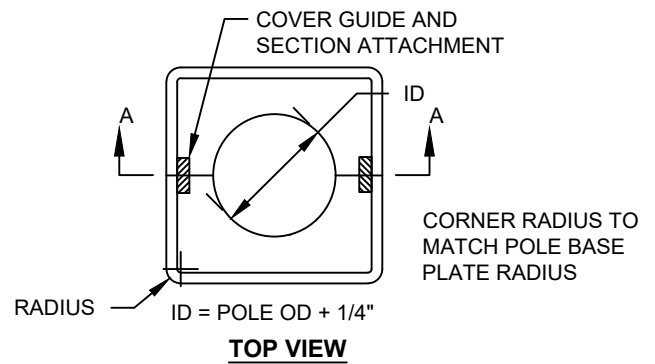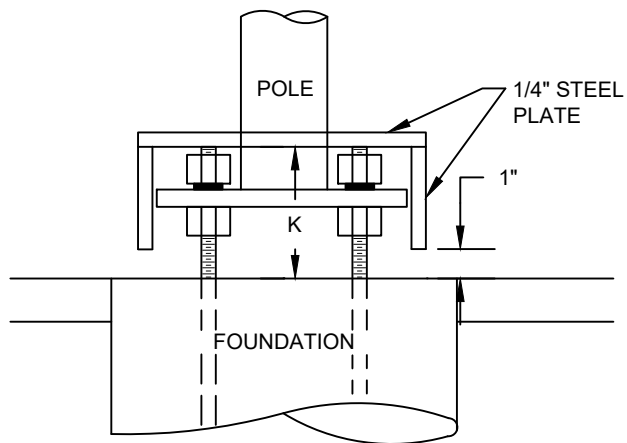

STEEL BASE COVER

STRAIN POLE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4170


07/01/2021

CITY ENGINEER


SHT 3 OF 7

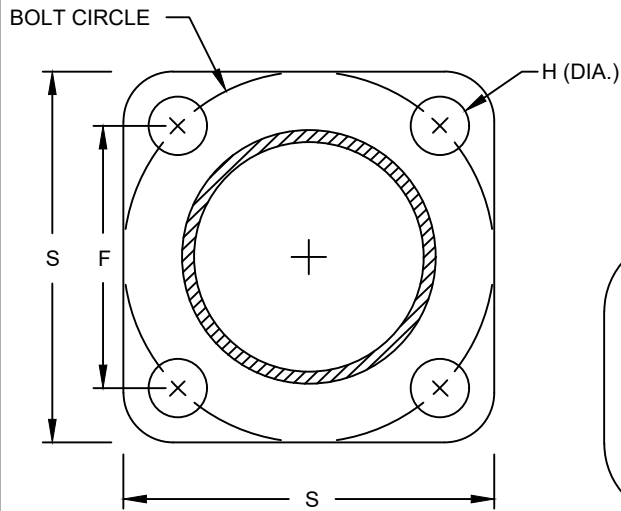

BASE PLATE

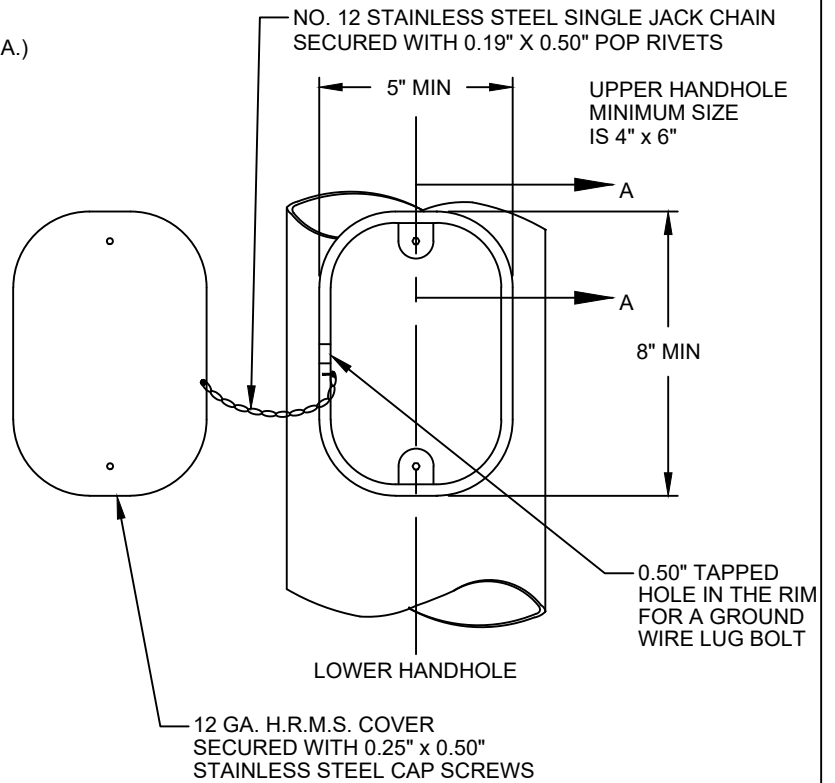

HANDHOLE

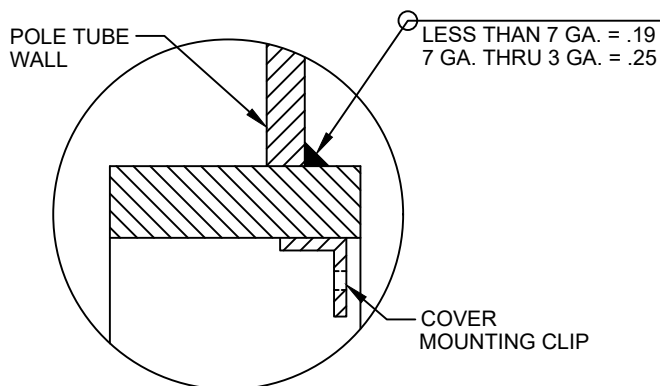

SECTION A-A

STRAIN POLE



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4170

07/01/2021

CITY ENGINEER

SHT 4 OF 7

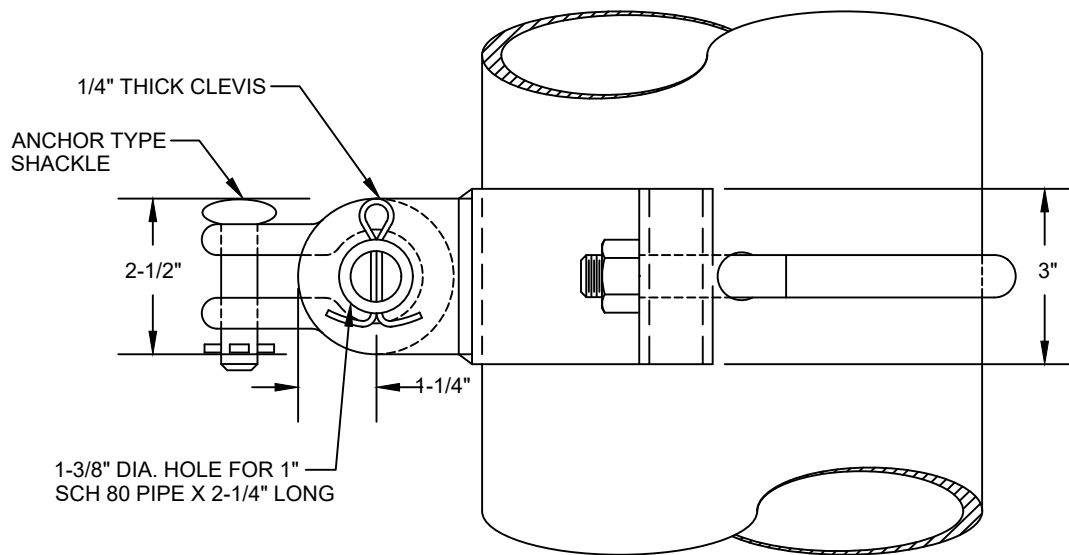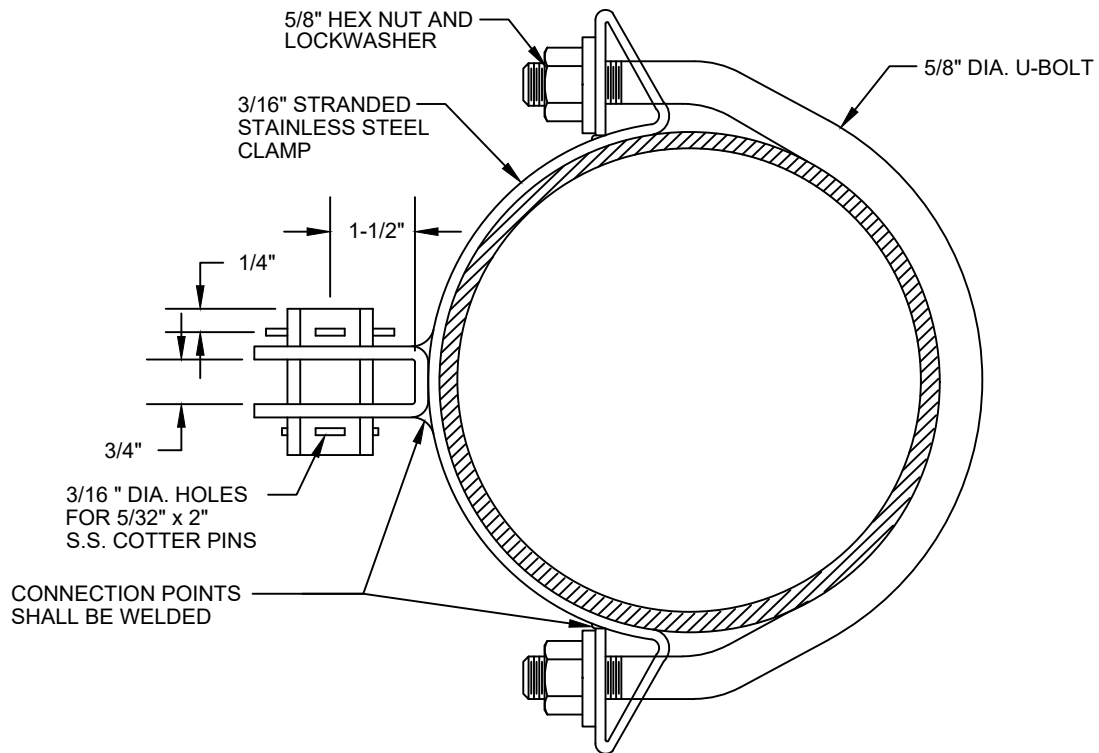

SPAN WIRE CLAMP

STRAIN POLE

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4170

07/01/2021

CITY ENGINEER

SHT 5 OF 7

ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE NOTED.

DESIGN NO.	BASE MOMENT AT YIELD (ft. kips)	TAPERED (NOTE A)		TAPERED (NOTE B)			ANCHOR BASE					PLATE SKIRT		MESS- ENGER WIRE SIZE
		BASE DIA.	MIN. WALL THICKNESS	BASE DIA.	MIN. WALL THICKNESS	NO. SIDES	BOLT CIRCLE	F	S	T	H	M	K	
5	121.0	12	.239	12.00	.239	N/A	16.0	11.3125	17.0	2.0	2.125	6.75	7.75	3/8
6	149.0	12	.299	12.00	.250	10	16.0	11.3125	17.0	2.0	2.125	6.75	7.75	3/8
7	176.0	13	.299	13.00	.250	12	18.0	12.7500	18.5	2.0	2.375	7.50	8.50	3/8
8	206.0	14	.299	15.00	.219	14	20.0	14.1250	20.5	2.0	2.375	7.50	8.50	3/8
9	228.0	12	.478 (2 PLY)	14.75	.250	14	22.0	15.5000	23.0	2.5	2.375	7.50	8.50	7/16
10	270.0	13	.478 (2 PLY)	16.00	.250	16	22.0	15.5000	23.0	2.5	2.625	8.00	9.00	7/16
11	316.0	14	.478 (2 PLY)	15.50	.313	14	22.0	15.5000	23.0	2.5	2.625	8.00	9.00	7/16
12	385.0	14	.598 (2 PLY)	17.25	.313	16	23.5	16.6250	24.5	2.5	2.875	8.75	9.75	1/2
13	590 ^C	18	.626	18.00	.500	14	26.0	18.3800	30.0	3.5	3.375	10.75	11.75	1/2
14	900 ^C	23	.563	22.00	.500	16	34.0	24.0400	36.5	3.5	3.375	10.75	11.75	1/2

NOTES:

- A. TAPERED TUBE SHALL BE STEEL WITH A MINIMUM OF 55,000 PSI YIELD STRESS AFTER GALVANIZING.
- B. DESIGN 5 SHALL BE ASTM A595M STEEL WITH A MINIMUM OF 55,000 PSI YIELD STRENGTH AFTER GALVANIZING. DESIGNS 6 THRU 14 SHALL BE ASTM A572M GRADE 55 OR 65 STEEL WITH A MINIMUM OF 55,000 OR 65,000 PSI YIELD STRENGTH AFTER GALVANIZING, RESPECTIVELY.
- C. MAX. DESIGN BASE MOMENT; DESIGN 13 AND 14 STRAIN POLES ARE AASHTO 1994 COMPLIANT.

STRAIN POLE

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4170

07/01/2021

CITY ENGINEER

SHT 6 OF 7

NOTES:

1. SIGNAL CABLE ENTRANCE SHALL BE A 2" MINIMUM BLIND HALF COUPLING PROVIDED IN EACH POLE ON CORNERS WITHOUT CABINET. MINIMUM OF 3" BLIND HALF COUPLING ON CORNER WITH CABINET OR AS SPECIFIED ON THE PLANS.
2. SPAN WIRE CLAMP SHALL BE GALVANIZED STEEL, CAPABLE OF RESISTING A LOAD OF 12,500 POUNDS MINIMUM WITHOUT PERMANENT DISTORTION.
3. FOR FOUNDATION DETAILS, INCLUDING ANCHOR BOLT DETAILS, SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4160.
4. THE BASE PLATE SHALL BE WELDED TO TWO PLY POLES WITH AWS PREQUALIFIED WELDS IN CONFORMANCE WITH 730.04.
5. A MINIMUM OF ONE FULL BOLT THREAD SHALL REMAIN ABOVE THE ANCHOR NUT.
6. ALL UNUSED COUPLINGS SHALL BE PROVIDED WITH A REMOVABLE GALVANIZED CAST IRON PLUG.
7. PROVIDE 1 OR 2 WELDED CABLE SUPPORT HOOKS ('J' OR 'C' HOOKS) LOCATED ON THE INSIDE OF THE POLE.
8. STRAIN POLES SHALL BE COATED IN ACCORDANCE WITH THE PLANS.
9. PROVIDE 1, 2 OR 3 HANDHOLES, AS PER PLAN DESIGN, EACH COMPLETE WITH A COVER, A RECTANGULAR OR ELLIPTICAL REINFORCED FRAME, AND A STAINLESS STEEL FASTENER FOR THE COVER. THE FASTENER SHALL BE FLUSH WITH THE HANDHOLE SURFACE. THE HANDHOLES SHALL BE LOCATED 180 DEGREES FROM THE RESULTANT FORCE UNLESS SPECIFIED OTHERWISE.
 - A.) THE HAND HOLE NEAR THE BRACKET ARM SHALL HAVE A MINIMUM INSIDE OPENING OF 3" X 5" AND BE SIMILAR IN DESIGN TO THE BOTTOM HAND HOLE EXCEPT THAT NO GROUNDING PROVISION IS REQUIRED.
 - B.) THE HAND HOLE NEAR THE SPAN WIRE ATTACHMENT POINT SHALL HAVE A MINIMUM INSIDE OPENING OF 4" X 6" AND BE SIMILAR IN DESIGN TO THE BOTTOM HAND HOLE EXCEPT THAT NO GROUNDING PROVISION IS REQUIRED.
 - C.) THE BOTTOM HAND HOLE SHALL HAVE A MINIMUM INSIDE OPENING OF 5" X 8". A GROUNDING PROVISION CAPABLE OF ACCEPTING 4 - #4 AWG COPPER GROUNDING WIRES SHALL BE PROVIDED AND SHALL BE ATTACHED TO THE FRAME.
10. PROVIDE A REMOVABLE POLE CAP ATTACHED EITHER BY A MINIMUM OF 3 STAINLESS STEEL SET SCREWS OR BY A STAINLESS STEEL THROUGH BOLT.
11. FOR BRACKET ARM DETAILS SEE CITY OF COLUMBUS STANDARD DRAWING 4110.

STRAIN POLE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4170

07/01/2021

SHT 7 OF 7

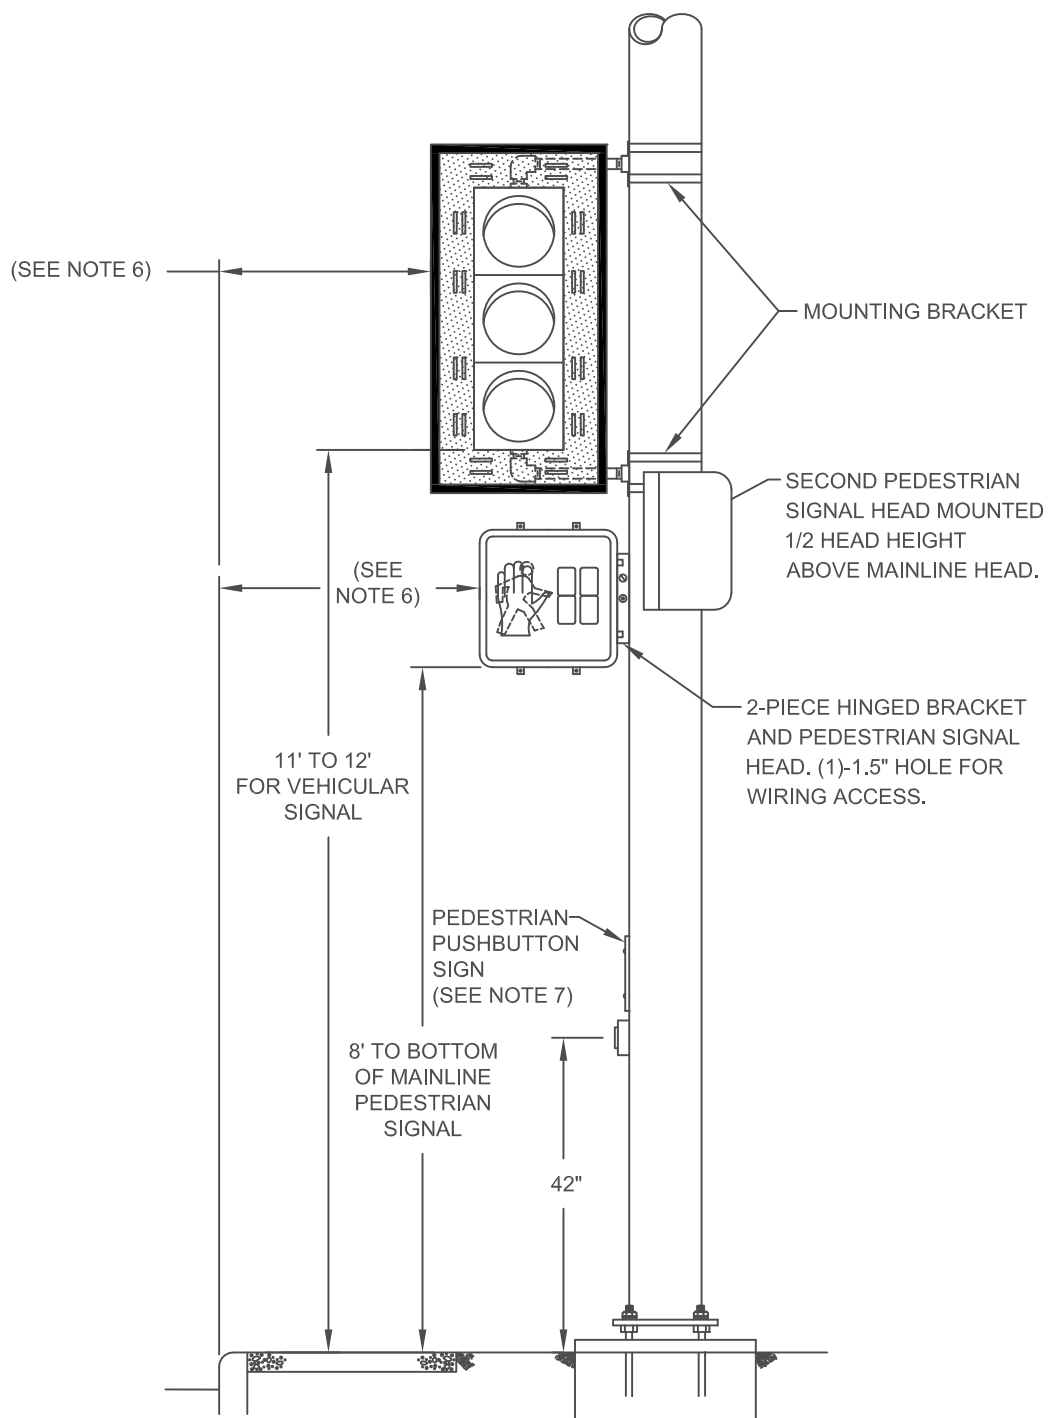

POLE MOUNTING STANDARD

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4200

Hassan Zahra

CITY ENGINEER

8/01/2015

SHT 1 OF 2

NOTES:

1. SIGNAL HEAD CONDUIT BRACKETS AND CONDUIT FITTINGS SHALL BE GALVANIZED AND PAINTED (EXCEPT POLE CLAMPS OR BANDS) TO MATCH THE POLE.
2. THE SIGNAL HEAD BRACKET ARMS SHALL BE ATTACHED TO STEEL POLES BY HUB PLATES ATTACHED TO THE POLE WITH 3/4" WIDE STAINLESS STEEL BANDS (TWO BANDS PER HUB PLATE).


A. HOLES FOR WIRE ACCESS SHALL BE FIELD DRILLED.

FIELD INSTALLATION OF THE WIRING HOLES FOR SIGNAL HEADS AND PUSHBUTTONS WILL BE PERMITTED PROVIDED THAT THE HOLES ARE DRILLED OR HOLE SAWN. NO TORCH CUTTING OR FIELD WELDING WILL BE PERMITTED. CUT SURFACES SHALL BE FILED SMOOTH AND COVERED WITH TWO COATS OF ZINC RICH PAINT. GROMMETS OR WIRING GUIDES SHALL BE INSTALLED IN THE HOLES.

3. VERTICAL SPACING BETWEEN BRACKET FITTINGS SHALL BE DETERMINED BY THE CONTRACTOR, AND SHALL BE THE DIMENSION FROM CENTERLINE TO CENTERLINE OF THE BRACKET ARMS NECESSARY TO ACCOMMODATE THE VERTICAL HEIGHT OF THE SIGNAL HEAD PLUS NOT MORE THAN 10".
4. OUTER JACKET OF THE PEDESTRIAN SIGNAL CABLE SHALL EXTEND INTO THE SIGNAL HOUSING
5. THE PEDESTRIAN SIGNAL HEAD HOUSING AND CLAM SHELL MOUNTING BRACKETS SHALL BE BLACK MATCHING FEDERAL STANDARD 595B, COLOR # 27038.
6. CLEARANCE DISTANCES PROVIDED IN THE OHIO DEPARTMENT OF TRANSPORTATION'S LOCATION AND DESIGN MANUAL, VOLUME 1 OR A MINIMUM OF 2', WHICH EVER IS GREATER, SHALL BE MAINTAINED.
7. PLACEMENT OF PEDESTRIAN PUSHBUTTONS SIGN SHALL BE PER CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4230.

POLE MOUNTING STANDARD

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION




CITY ENGINEER


STD DWG
4200

8/01/2015

SHT 2 OF 2

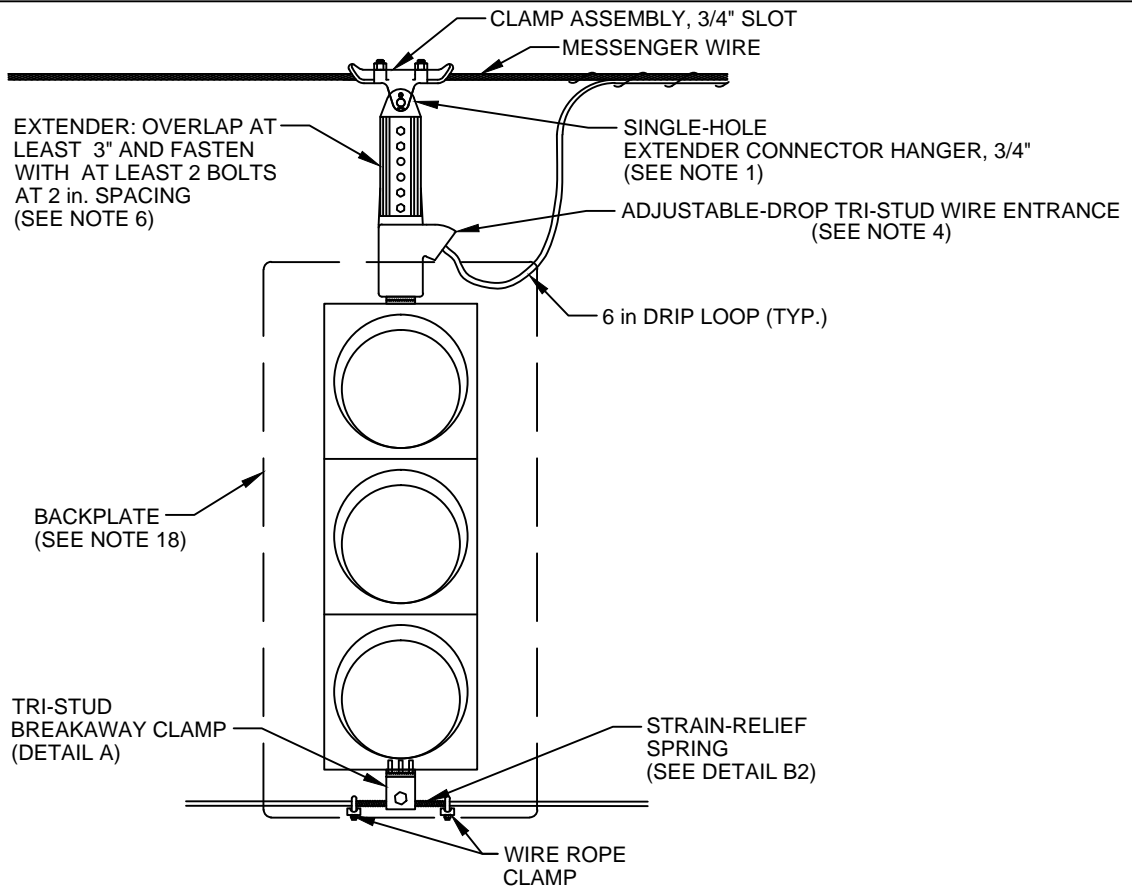

3-SECTION SIGNAL HEAD SUSPENSION

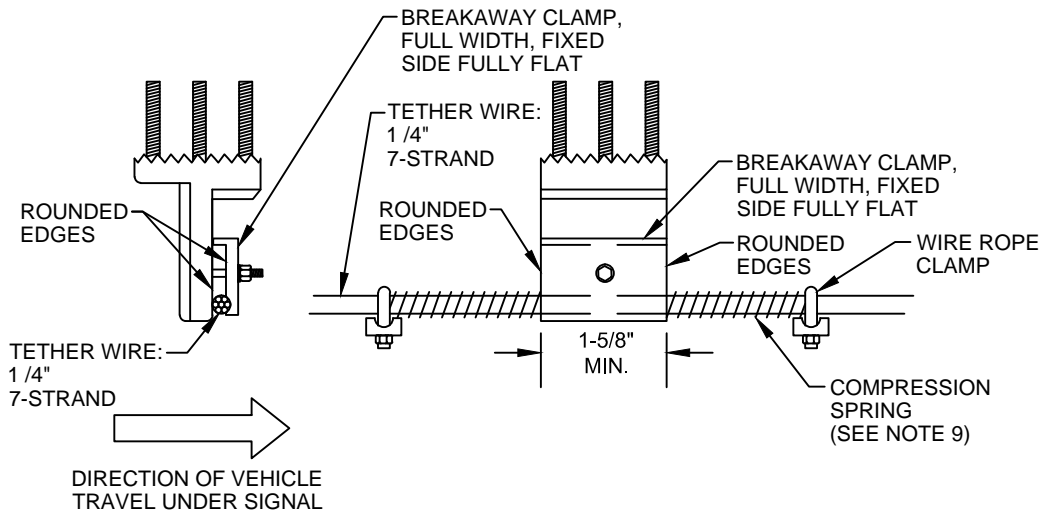

DETAIL A: BREAKWAY TETHER ANCHOR (TYPICAL, SEE NOTE 6)

OVERHEAD SIGNAL ATTACHMENTS - SPAN WIRE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4202


8/10/2017

CITY ENGINEER

SHT 2 OF 7

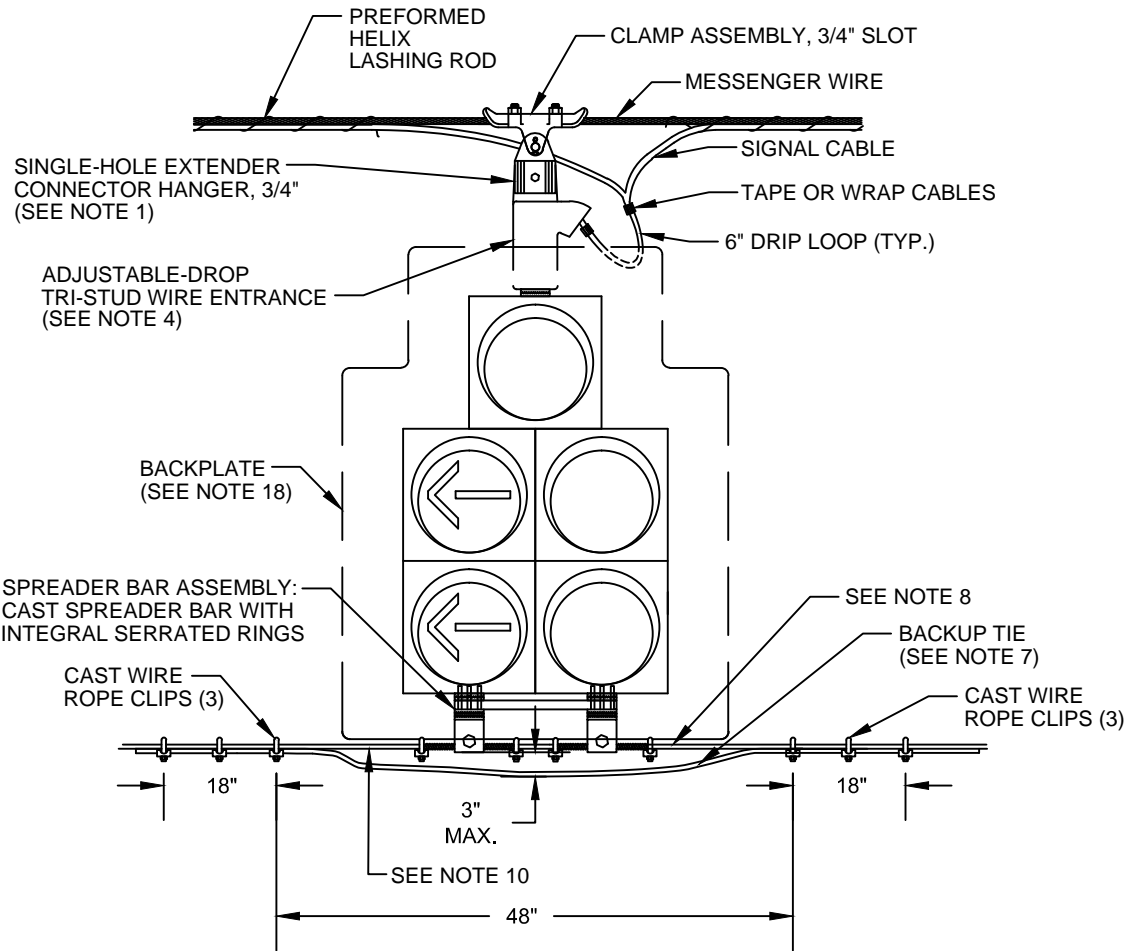

5-SECTION SIGNAL HEAD SUSPENSION

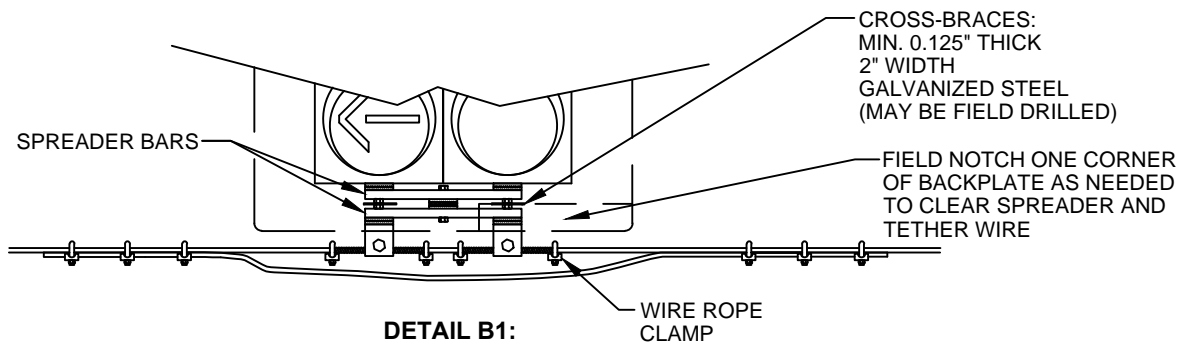

**DETAIL B1:
DOUBLE SPREADER BARS
AND CROSS-BRACING ON
SKEWED SPANS
(FRONT VIEW)**

OVERHEAD SIGNAL ATTACHMENTS - SPAN WIRE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4202

8/10/2017

CITY ENGINEER

SHT 3 OF 7

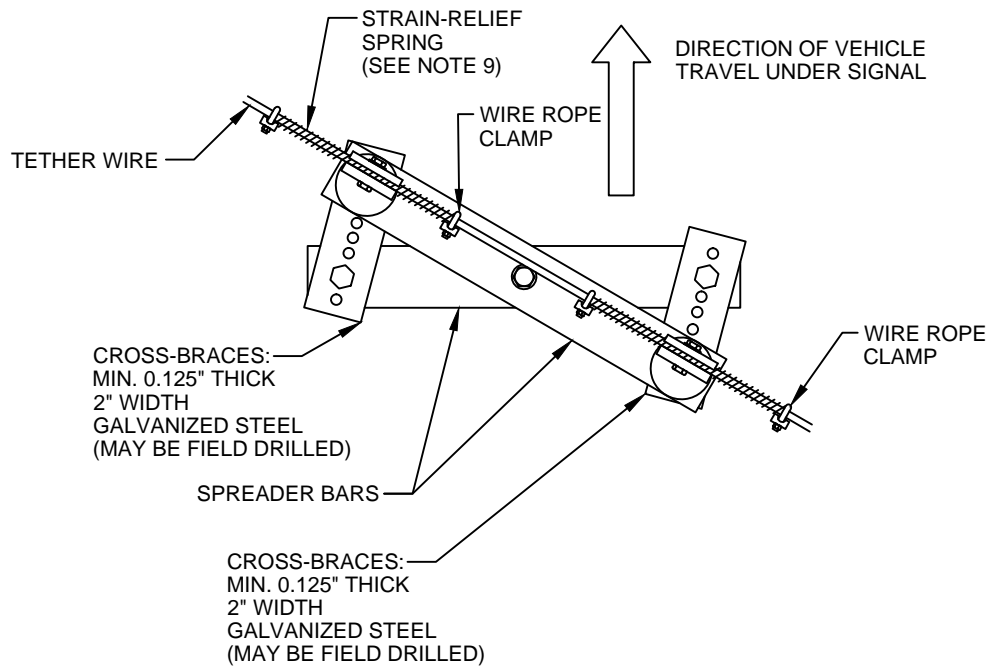

DETAIL B2:
DOUBLE SPREADER BARS
AND CROSS-BRACING ON
SKEWED SPANS
(BOTTOM VIEW)

OVERHEAD SIGNAL ATTACHMENTS - SPAN WIRE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4202

8/10/2017

CITY ENGINEER

SHT 4 OF 7

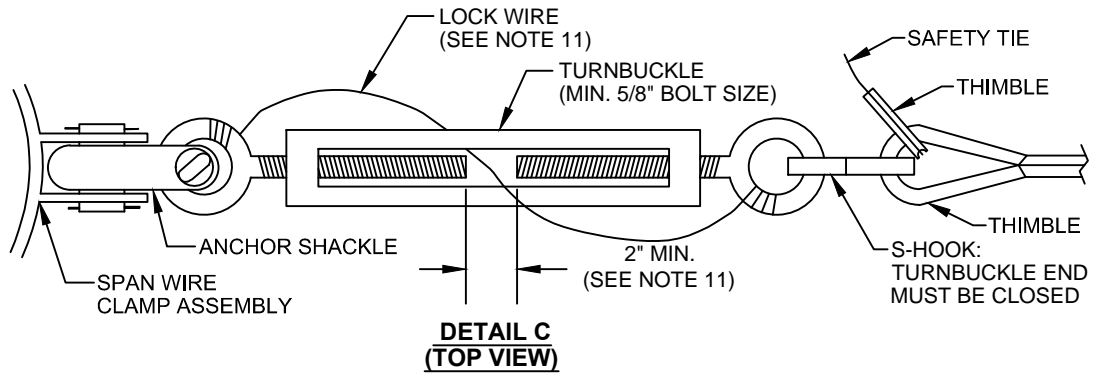

OVERHEAD SIGNAL ATTACHMENTS - SPAN WIRE

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4202

CITY ENGINEER

8/10/2017

SHT 5 OF 7

NOTES:

1. ADJUST HANGER AND SPAN WIRE CLAMP TO ELIMINATE ALL PLAY BETWEEN HANGER AND CLAMP BY USING SHIM WASHERS AS NECESSARY. CAST 3/4" ALUMINUM MATCHING CLAMPS AND HANGERS WITH A TIGHT INITIAL FIT SHALL BE USED.
2. ALL SIGNAL HEAD ASSEMBLIES SHALL BE INSTALLED IN A PLUMB POSITION AND PERPENDICULAR TO THE APPROACH LANE.
3. ALL SIGNAL HEADS SHALL BE INSTALLED WITH THEIR LOWEST PART (INCLUDING TETHER ATTACHMENT HARDWARE AND BACKPLATES) WITH A CLEARANCE ABOVE THE ROADWAY PAVEMENT AT ALL POINTS OF 16.5' MINIMUM, 19' MAXIMUM. HOWEVER 17' IS PREFERRED HEIGHT. TO OBTAIN 17' IT IS INTENDED THAT THIS CLEARANCE BE OBTAINED WITHOUT THE USE OF BOTTOM EXTENDERS, BUT RATHER BY THE CAREFUL SELECTION OF FOUNDATION HEIGHTS, ATTACHMENT HEIGHTS, SPAN WIRE SAG, AND OTHER FACTORS DURING THE INSTALLATION. IF THE INSTALLATION CANNOT BE ADJUSTED TO THE PROPER CLEARANCE THE CONTRACTOR SHALL ADVISE THE CITY OF ALL SIGNALS WHICH EXCEED THE MAXIMUM.
4. SIGNAL HEAD ROTATION SHALL BE PREVENTED BY THE USE OF SERRATED RINGS AND TRI-STUDS OR OTHER POSITIVE LOCKING DEVICES INCORPORATED IN THE SIGNAL HOUSING AND AT CRITICAL LOCATIONS IN THE SUPPORTING HARDWARE. ONLY SINGLE-PIECE TRI-STUD ENTRANCE PORTS SHALL BE USED, NOT INSERTS. NYLON LOCKING OR DEFORMED-THREADED NUTS SHALL BE USED.
5. ALL CONDUCTORS SHALL HAVE ADEQUATE CLEARANCE BETWEEN HANGERS, THIMBLES, BULLRINGS, ETC. IN ORDER TO AVOID DAMAGE FROM RUBBING.
6. FOR ALL TETHERED INSTALLATIONS, BREAKAWAY TETHER ANCHOR(S) SHALL BE INSTALLED IN BOTTOM BRACKET. SIGNAL HEIGHT ADJUSTMENT SHALL BE MADE BY TOP-MOUNTED EXTENDERS ONLY. BREAKAWAY CLAMP SHALL BE FULL WIDTH WITH ROUNDED EDGES. CLAMP SHOULD COMPRESS TETHER WIRE ONLY AGAINST A FLAT SURFACE (DETAIL A).
7. BACKUP TIE SHALL BE 1 /4", 7-STRAND WIRE IDENTICAL TO TETHER WIRE. THREE CAST WIRE ROPE CLIPS ON EACH SIDE SHALL BE USED WITH 18" OVELAP AND SPACING AS SHOWN. TIE SHALL HANG NO LOWER THAN 17' ABOVE PAVEMENT, AND MUST NOT RUB AGAINST THE BREAKAWAY CLAMP. TIES UNDER 3-SECTION HEADS ARE RECOMMENDED IN WINDY AREAS; SHALL BE INSTALLED IF SPECIFIED IN PLANS, OR IF DIRECTED BY THE CITY. SPACING OF CLIPS MAY BE ADJUSTED TO ACCOMODATE ADJACENT HEADS. CLOSELY SPACED ADJACENT HEADS MAY SHARE A SINGLE BACKUP TIE AND WIRE ROPE CLIPS; THERE SHALL BE A MINIMUM OF THREE WIRE ROPE CLIPS BETWEEN HEADS.
8. MULTI-WAY HEADS WITH BACKPLATES SHALL NOT BE USED ON TETHERED SPANS. EXISTING MULTI-WAY HEADS SHALL BE SEPARATED AS DIRECTED BY THE CITY. REWIRE AS NECESSARY TO SEPARATE THE HEADS PER THE PROPER ALIGNMENT.
9. COMPRESSION SPRING, 0.375" OD, 0.054" WIRE DIAMETER, 10-12 COILS PER INCH, STAINLESS STEEL 6" MINIMUM LENGTH.

OVERHEAD SIGNAL ATTACHMENTS - SPAN WIRE

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4202

8/10/2017

SHT 6 OF 7

10. S-HOOK IS MATCHED TO THE STRAIN POLE DESIGN NUMBER (SEE TABLE 1). S-HOOK AND TURNBUCKLE ARE REQUIRED ONLY AT ONE END OF SIMPLE SPANS, ALL ENDS OF COMPLEX SPANS. S-HOOK SHALL BE CLOSED AT POLE END. IF S-HOOK BEGINS TO YIELD DURING INSTALLATION, IT SHALL BE REMOVED AND REPLACED. THE WIRE TENSION SHALL BE ADJUSTED TO MINIMIZE MOVEMENT OF SIGNAL HEADS IN HIGH WINDS. TYPICAL TENSION IS 600 TO 800 LBS.

TABLE 1 - S-HOOK PROPERTIES

Strain Pole Design No.	Galvanized Mild Steel S-Hook Wire Diameter (Inches)	S-hook yield point (+10%/-20%) (Pounds)
5 - 14	1/2	3300

11. LOCK WIRE SHALL BE STAINLESS STEEL, 1/8" SOFT TEMPER, WOUND TO PREVENT TURNING OF THE TURNBUCKLE BODY. FINISHED SPAN SHALL HAVE AT LEAST 2" OF SPACE FOR TURNBUCKLE ADJUSTMENT. TURNBUCKLE SHALL NOT BE OVERTIGHTENED. USE 8-INCH HAND TOOLS, MAXIMUM.
12. IF SIGNAL ORIENTATION IS NOT PERPENDICULAR TO SPAN AND TETHER WIRE, THEN USE AN ANCHOR EXTENSION. CLAMP ASSEMBLY MUST BE ATTACHED TO THE FLAT SIDE OF THE EXTENDER BAR.
13. INSTALL SAFETY TIE AT EACH TURNBUCKLE. THIS WIRE SHALL BE 1"X19", 1/8" STAINLESS STEEL. TIE SHOULD BE SLACK, BUT NOT SO SLACK AS TO CONTACT POLE. USE 3 CLIPS PER END AT 3-1/4" SPACING.
14. TETHER WIRE SHALL BE 7-STRAND ASTM A475 HS OR EHS GRADE 1/4" ON ALL SPANS, INSTALL TETHER HORIZONTALLY. MAINTAIN PREFERRED CLEARANCE OF 17' OVER ROADWAY.
15. SPAN WIRE CLAMP AS PER CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4170 REQUIRED FOR TETHER WIRE ATTACHMENT OR APPROVED EQUAL RATED AT 3650 LBS. OR HIGHER. ALTERNATE ATTACHMENT METHOD SHALL NOT BE PERMITTED.
16. SAFETY TIE ANCHOR HEIGHT ABOVE TETHER IS ADJUSTED IN THE FIELD BEFORE S-HOOK IS INSTALLED. DIMENSION X (SAFETY TIE HEIGHT) SHALL BE ADJUSTED SO THAT THE MINIMUM VERTICAL CLEARANCE OF THE SAGGING TETHER WIRE ABOVE THE PAVEMENT WITHOUT THE S-HOOK INSTALLED IS AT LEAST 14'. MINIMUM DISTANCE BETWEEN THE SAFETY TIE CLAMP AND TETHER CLAMP SHALL BE 1.5' AND CONTAIN ENOUGH SLACK FOR HEAD TO SWAY IN HIGH WINDS. SAFETY TIE ANCHOR MAY BE ANY GALVANIZED OR STAINLESS STEEL POLE CLAMP ASSEMBLY RATED AT 3650 POUNDS OR HIGHER.
17. ON SPANS WITH BULLRINGS, A TIE SHALL BE PROVIDED BETWEEN MESSENGER AND TETHER BULLRINGS IF A 14' CLEARANCE CANNOT BE MAINTAINED AFTER S-HOOK OPENING. THIS VERTICAL TIE SHALL BE 1"X19", 1/16" STAINLESS STEEL. TIE SHALL BE SLIGHTLY SLACK, TIED BACK USING CAST WIRE ROPE CLIPS AS SHOWN. WIRE ROPE CLIPS SHALL NOT BE OVER-TIGHTENED.
18. FOR BACKPLATES SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4205.
19. ALL SPREADER BAR HARDWARE SHALL BE STAINLESS STEEL, WITH NYLON LOCKING OR DEFORMED-THREAD NUTS.
20. DO NOT TETHER SIGNS ON SIGNAL SPANS.

OVERHEAD SIGNAL ATTACHMENTS - SPAN WIRE


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4202

8/10/2017

SHT 7 OF 7

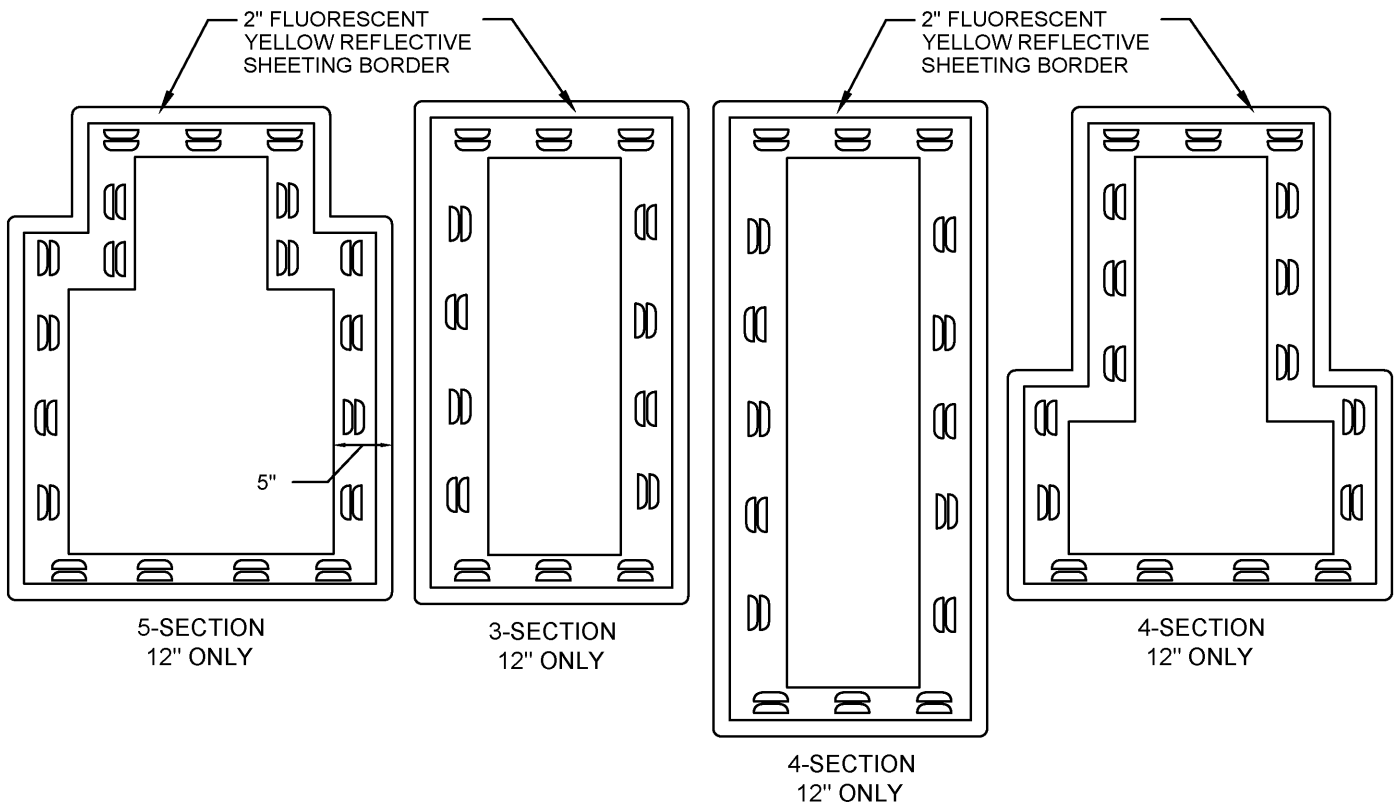

**BACKPLATE LOUVER
CONFIGURATION**
(SEE NOTE BELOW)

NOTE:

ALL BACKPLATES SHALL HAVE LOUVERS AND 2" FLUORESCENT YELLOW REFLECTIVE BORDER. BORDER SHALL NOT BE APPLIED OVER LOUVERS. LOUVERS SHOULD BE ORIENTED TO SCOOP AIR FROM THE FRONT SIDE AND ORIENTED WITH THE OPENINGS FACING ALTERNATE DIRECTIONS BY GROUPS, AS SHOWN. LOUVER OPEN AREA SHALL BE AT LEAST 8 PERCENT OF THE TOTAL BACKPLATE AREA. 5-SECTION BACKPLATES SHALL HAVE NOTCHED TOP CORNERS, AS SHOWN.

**TRAFFIC
SIGNAL
BACKPLATE**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahran

CITY ENGINEER


**STD DWG
4205**

5/01/2014

SHT 1 OF 1

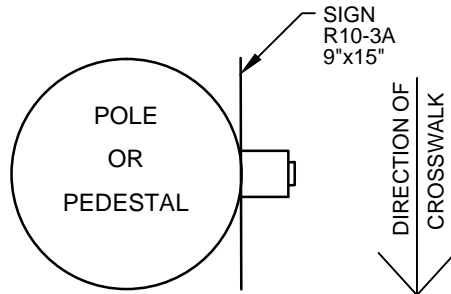

R10-3A-9 (L)
9"x15"

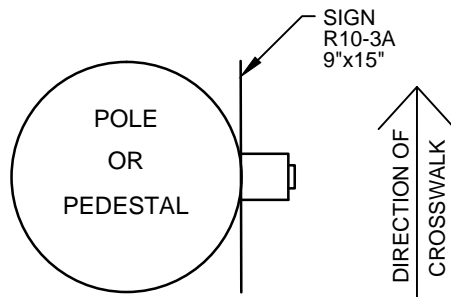

R10-3A-9 (R)
9"x15"

NOTE:

THE BOTTOM OF THE PUSHBUTTON SIGN SHALL BE MOUNTED JUST ABOVE THE TOP OF THE PUSHBUTTON.

Pedestrian Signal Heads Present

PUSHBUTTON & SIGN INSTALLATION DETAIL


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4230



CITY ENGINEER

10/01/2018

SHT 1 OF 2

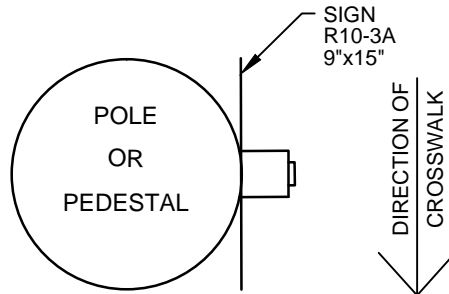

R10-4A-9 (L)
9"x15"

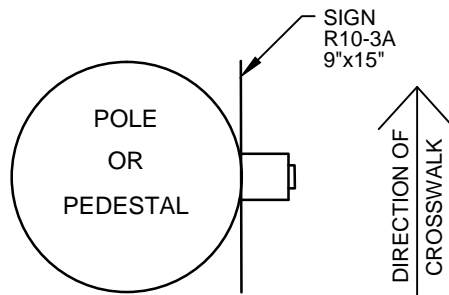

R10-4A-9 (R)
9"x15"

NOTE:

THE BOTTOM OF THE PUSHBUTTON SIGN SHALL BE MOUNTED JUST ABOVE THE TOP OF THE PUSHBUTTON.

Pedestrian Signal Heads Not Present

PUSHBUTTON & SIGN INSTALLATION DETAIL


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4230**


10/01/2018

CITY ENGINEER



SHT 2 OF 2

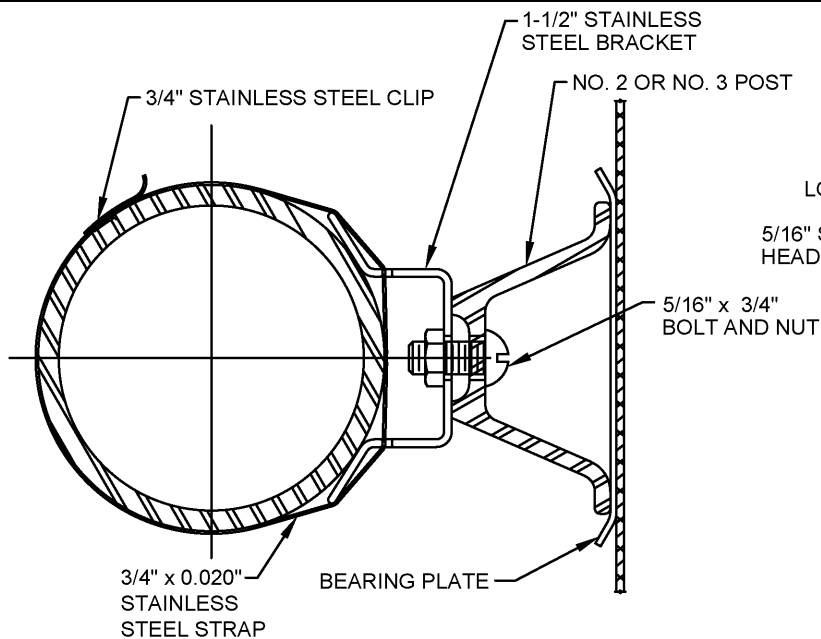

**U-CHANNEL ATTACHMENT
TO MAST ARM**

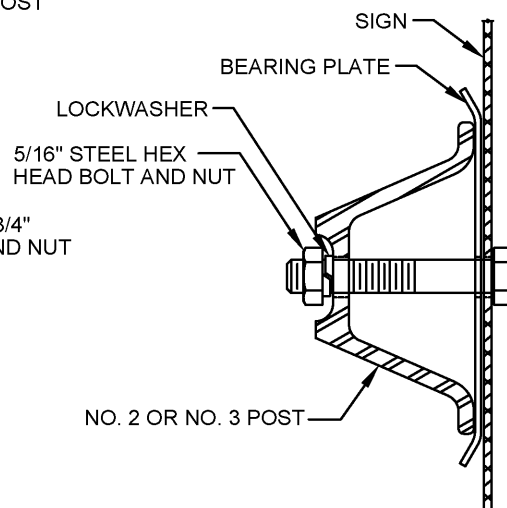

**SIGN TO U-CHANNEL
ATTACHMENT**

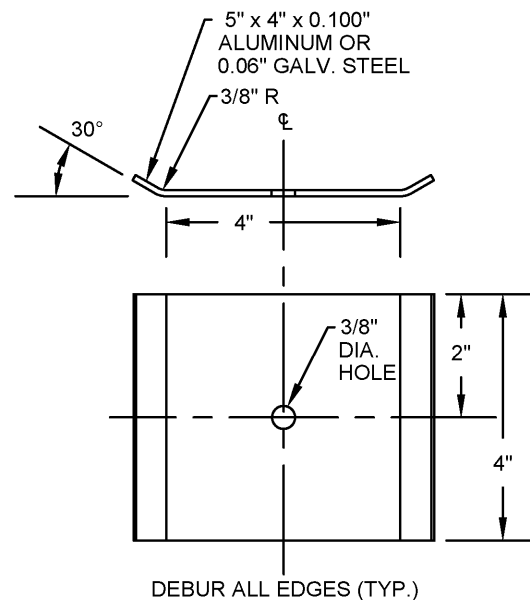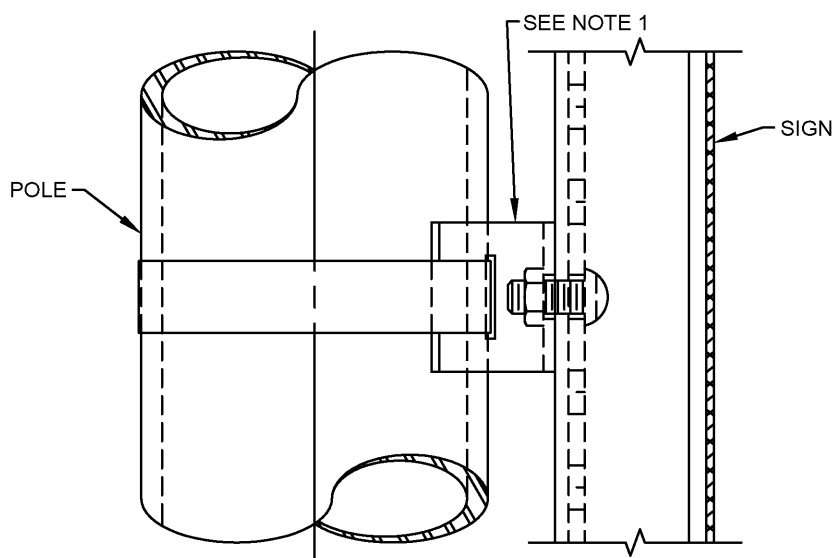

BEARING PLATE

NOTES:

1. USE A MINIMUM OF 2 BRACKETS (LOCATED 6" FROM TOP AND BOTTOM OF SIGN) PER INSTALLATION WITH MAXIMUM SPACING OF 3'.
2. ALL MOUNTING HARDWARE SHALL BE COATED TO MATCH SUPPORT STRUCTURE.
3. STAINLESS STEEL BANDING SHALL NOT BE PAINTED.

SIGN SUPPORT ASSEMBLY POLE MOUNTED

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


Hassan Zahran

CITY ENGINEER

**STD DWG
4253**

5/01/2014


SHT 1 OF 1

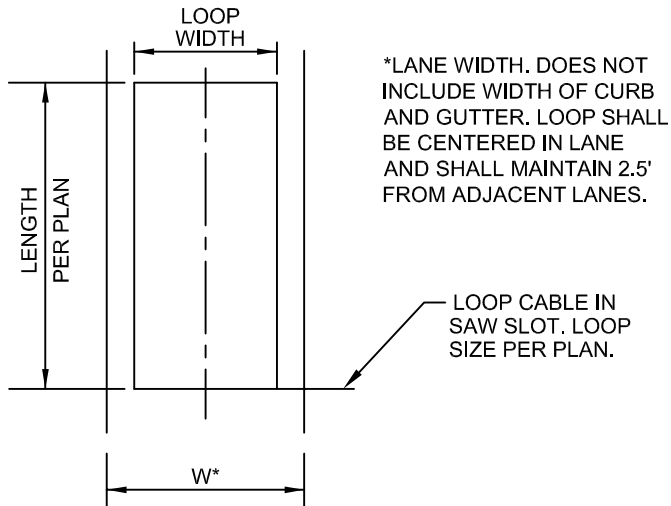

VEHICULAR DETECTOR

LOOP WIDTH	
LANE WIDTH (W) (FT.)	LOOP WIDTH (FT.)
$10 \leq W < 11$	5.0
$11 \leq W < 12$	5.5
$12 \leq W < 13$	6.0
$13 \leq W < 14$	3.5 - 3.5 (Q)
$14 \leq W < 15$	4.0 - 4.0 (Q)
$15 \leq W < 16$	4.5 - 4.5 (Q)
$16 \leq W < 17$	5.0 - 5.0 (Q)
$W \geq 17$	USE TWO LOOPS
(Q) = QUADRUPOLE LOOP	

**MULTIPLE LOOP DETECTOR
INSTALLATION DETAIL**

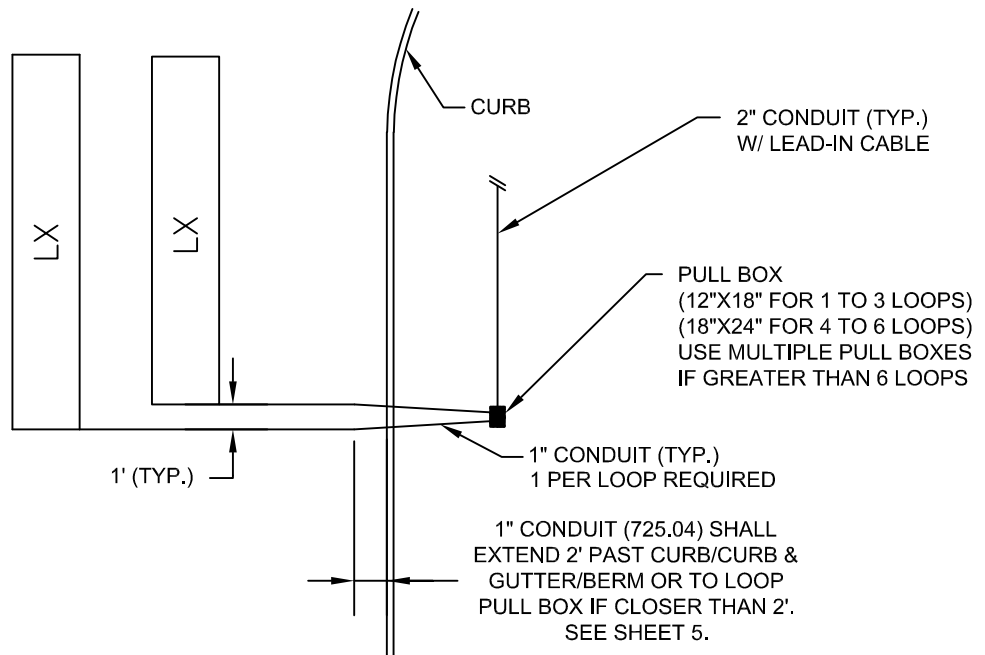

NOTES:

ONLY ONE SET OF LOOP WIRES SHALL BE RUN IN A SAW SLOT.

ALL ADJACENT SAW SLOTS SHALL HAVE A MINIMUM DISTANCE OF 1 FT BETWEEN THEM. NO SAW SLOT SHALL BE LOCATED WITHIN 1 FT OF A LONGITUDINAL OR TRANSVERSE JOINT IN P.C.C. PAVEMENTS IF THE SLOT IS PARALLEL TO THE JOINT.

DETECTOR LOOPS SHALL EACH BE ON A SEPARATE DETECTOR UNIT CHANNEL.

ALL CONDUIT FROM THE LOOP DETECTOR TO THE PULL BOX SHALL BE 725.04.

THE DETECTOR LOOP SHALL BEGIN 20 FT. BEHIND THE STOP LINE.

THE DETECTOR LOOP SHOULD EXTEND TO WITHIN 15 FT. OF THE CROSSING STREET'S EXTENSION OF THE FACE OF CURB/EDGE LINE.

DETECTOR LOOPS SHALL NOT EXCEED 39 FT. IN LENGTH.

THE 15 FT. REQUIREMENT MAY BE INCREASED IN ORDER TO NOT EXCEED THE MAXIMUM LENGTH REQUIREMENT.

VEHICULAR DETECTOR STANDARDS

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


[Signature]
CITY ENGINEER

STD DWG
4300


07/01/2020

SHT 1 OF 7

RECTANGULAR DETECTOR LOOP DETAILS

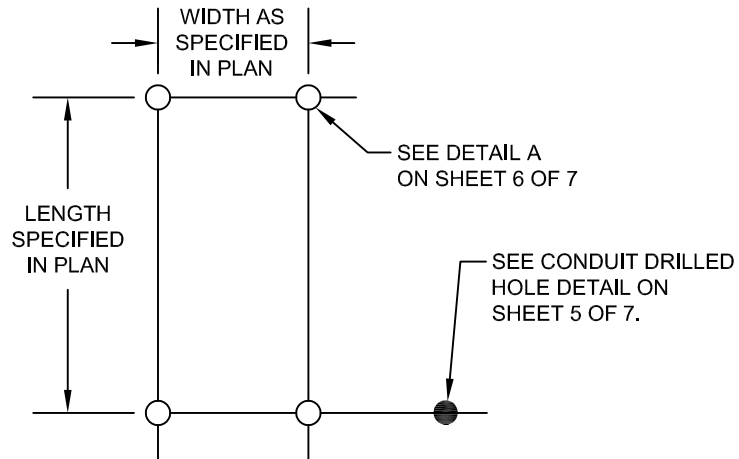

SAW CUT LAYOUT

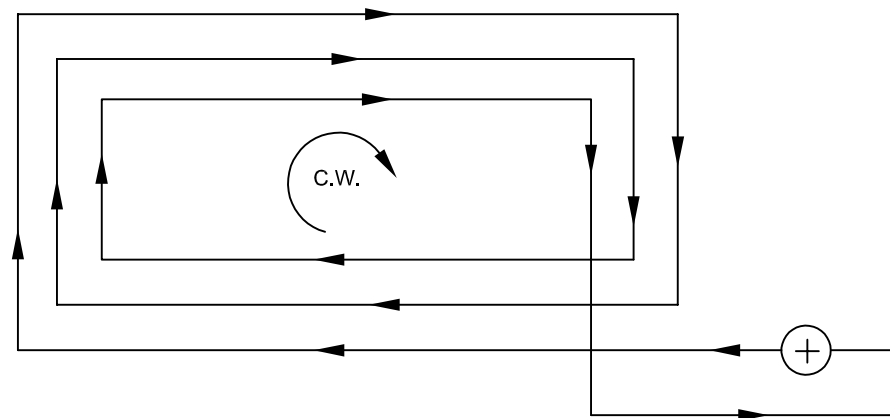

WINDING PATTERN SEE TABLE FOR NUMBER OF TURNS

RECTANGULAR LOOP CONSTRUCTION	
LOOP TYPE	NUMBER OF TURNS
PRESENCE DETECTION LOOPS	3
ADVANCED DETECTION LOOPS (6'x6')	4

VEHICULAR DETECTOR STANDARDS

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

**STD DWG
4300**

07/01/2020

SHT 2 OF 7


Diagram illustrating the layout of conduits in a plan view. The layout shows a grid of conduits with dimensions and callouts:

- WIDTH AS SPECIFIED IN PLAN**: Dimension across the top of the grid.
- LENGTH SPECIFIED IN PLAN**: Dimension along the left side of the grid.
- SEE DETAIL A ON SHEET 6 OF 7**: Callout pointing to the top-right corner of the grid.
- SEE "CONDUIT DRILLED HOLE DETAIL" FOR 1" CONDUIT ON SHEET 5 OF 7**: Callout pointing to the bottom-right corner of the grid.


The diagram shows a circuit with several interconnected loops. A positive terminal, represented by a circle with a '+' sign, is located at the bottom right. Multiple wires with arrows indicate the direction of current flow throughout the circuit, forming a series of nested and overlapping rectangular paths.

NUMBER OF TURNS IS 2-4-2

CITY ENGINEER

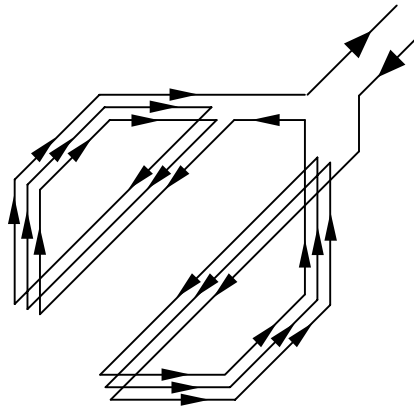

WINDING DETAIL

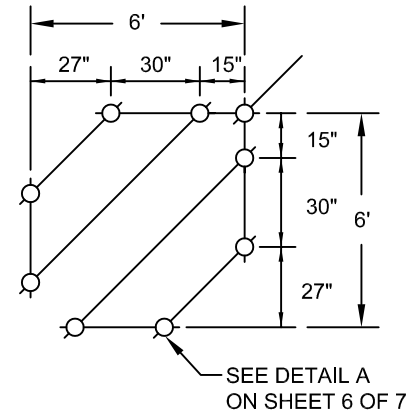

SAWCUT DETAIL

**BICYCLE ONLY
LOOP DETECTOR
INSTALLATION DETAIL**

BICYCLE LOOP CONSTRUCTION	
LOOP TYPE	NUMBER OF TURNS
PRESENCE DETECTION LOOPS	3-3-3-3

VEHICULAR DETECTOR STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4300**

07/01/2020

CITY ENGINEER

SHT 4 OF 7

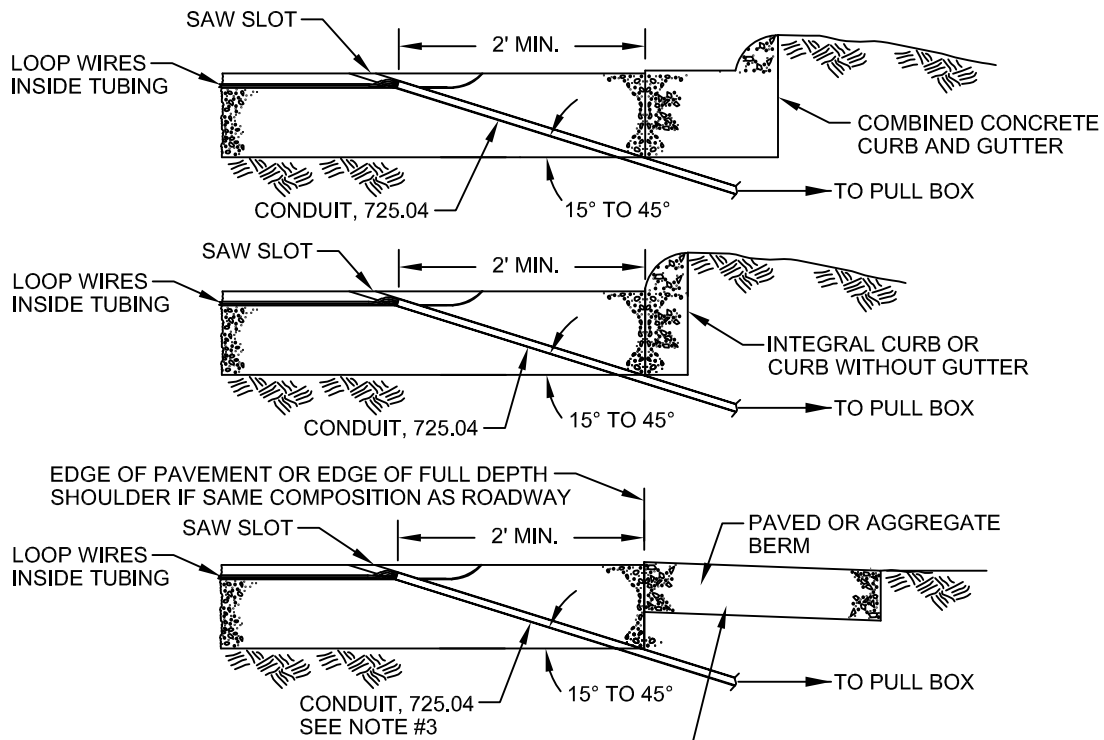


NO TRENCHING OR UNDERCUTTING CLOSER THAN 2' FROM THE EDGE OF PAVEMENT. BACKFILL TRENCH UNDER BERM WITH THE LOW STRENGTH MORTAR.

NOTES:

1. THE DRILLED HOLE SHALL BE LOCATED AS SHOWN ABOVE AND WITHIN THE FULL DEPTH PAVEMENT. IT SHALL NOT BE DRILLED OR CUT THROUGH THE PAVED BERM, CURB OR CURB AND GUTTER SECTION.
2. IN AREAS OF POOR PAVEMENT CONDITION, THE SAW SLOT DEPTH SHALL BE INCREASED TO INSURE ADEQUATE WIRE EMBEDMENT. ALL FIELD ADJUSTMENTS SHALL BE SUBJECT TO THE APPROVAL OF THE ENGINEER.
3. IF AN EXISTING PAVED BERM IS 4.5" THICK OR MORE, THE LOOP WIRE MAY BE INSTALLED IN A SAW SLOT CUT ACROSS THE BERM. WHEN PAVED BERM ARE LESS THAN 4.5" THICK, THE CONDUIT RACEWAY SHALL BE INSTALLED AS SHOWN.

TYPICAL DRILLED HOLE LOCATIONS FOR 1" CONDUIT

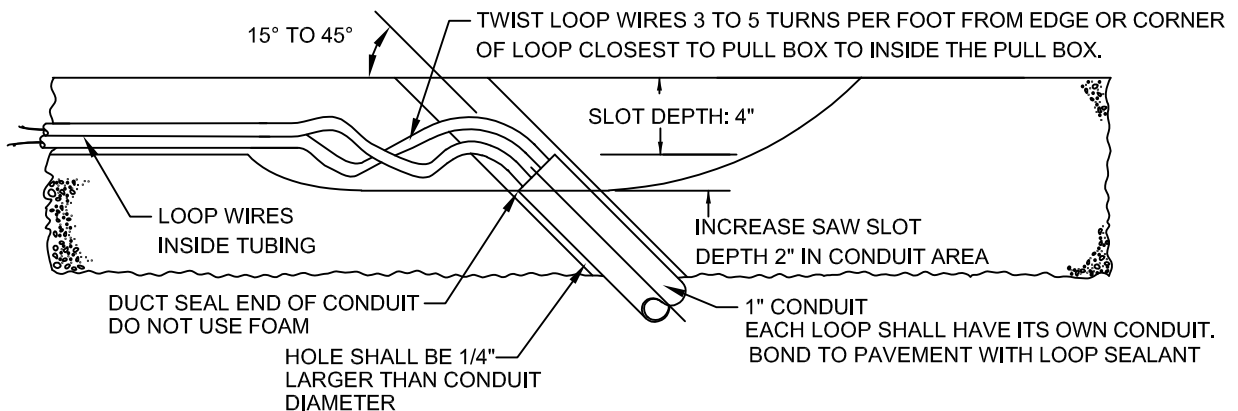

CONDUIT DRILLED HOLE DETAIL FOR 1" CONDUIT

VEHICULAR DETECTOR STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG
4300

07/01/2020

SHT 5 OF 7

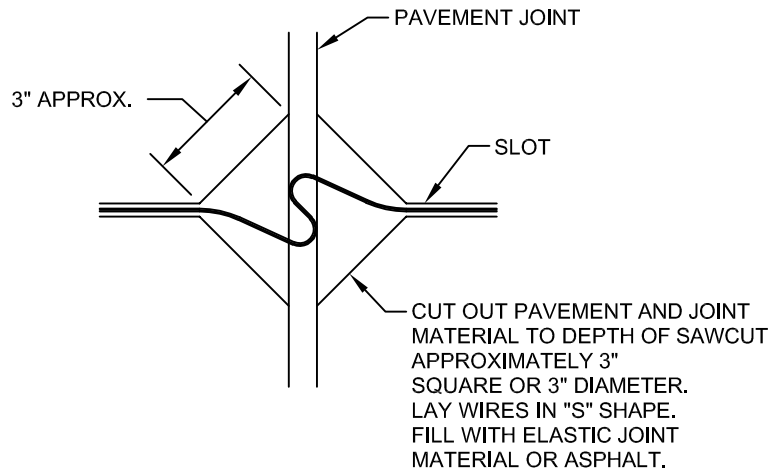

JOINT CROSSING DETAIL
IN PORTLAND CEMENT CONCRETE
PAVEMENTS

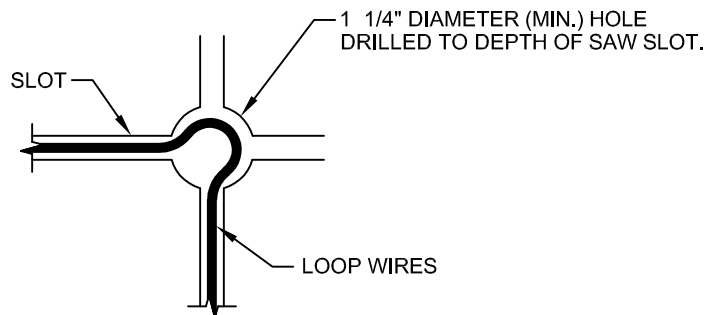

DETAIL A

VEHICULAR DETECTOR STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG
4300

07/01/2020

SHT 6 OF 7

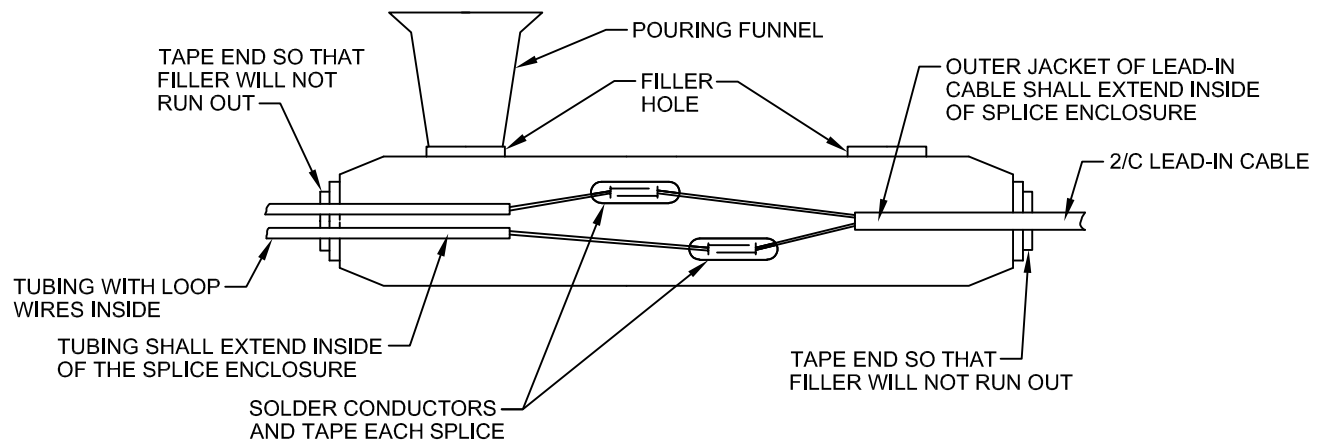

SPLICE ENCLOSURE DETAIL

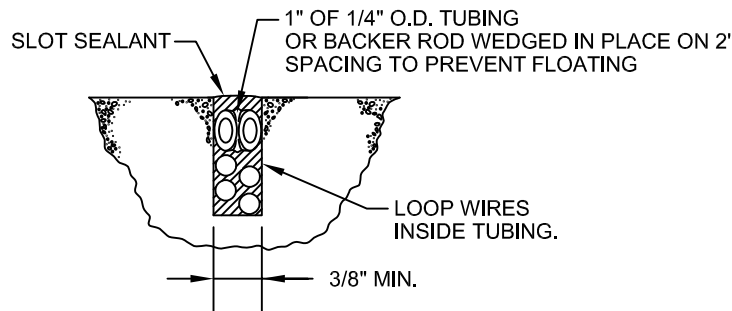

SLOT DETAIL

NOTES:

LOOP DETECTOR WIRE TO LEAD-IN CABLE SPLICES WITHIN THE ENCAPSULATED SPLICE ENCLOSURE SHALL BE SOLDERED.

IF A PULLBOX IS NOT SPECIFIED IN THE PLANS, THE WATERPROOF SPLICE ENCLOSURE SHALL BE LOCATED IN THE FIRST ENTERED POLE OR PEDESTAL, EXCEPT IF THE CONTROLLER CABINET IS MOUNTED ON THAT POLE OR PEDESTAL, IN WHICH CASE THE LOOP WIRES SHALL BE ROUTED DIRECTLY INTO THE CABINET.

THE ENCLOSURE SHALL NOT CONTAIN VISIBLE AIR BUBBLES (VOIDS) GREATER THAN 1/4 IN (16 MM)

LOOP SLOT DEPTH SHALL BE 4 IN.

LOOP DETECTOR WIRE IN TUBING SHALL BE AS SPECIFIED IN CMSC TABLE 732.19-1

LOOP DETECTOR SEALANT SHALL BE PER THE CITY OF COLUMBUS PRE-QUALIFIED PRODUCT LIST.

SAW SLOTS SHALL BE THOROUGHLY CLEANED AND DRIED PRIOR TO INSTALLATION OF SEALANT.

VEHICULAR DETECTOR STANDARDS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

**STD DWG
4300**

07/01/2020

CITY ENGINEER

SHT 7 OF 7

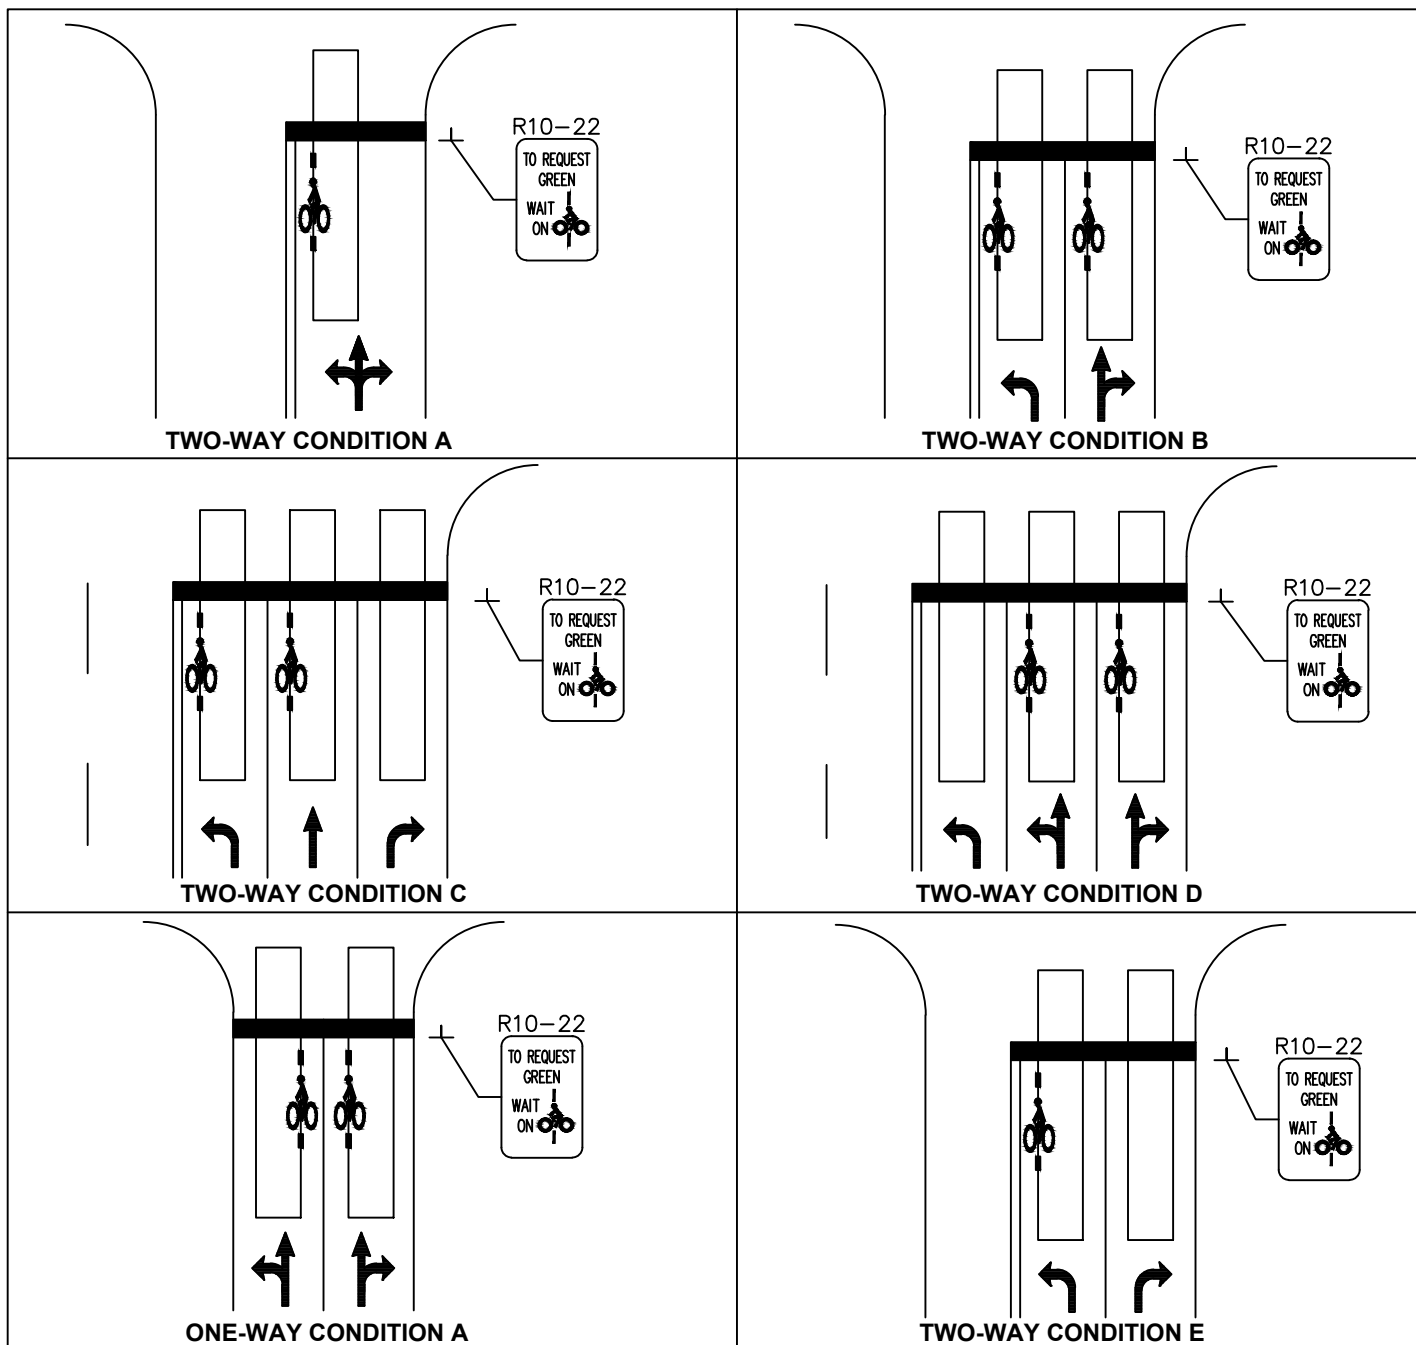

NOTES:

BICYCLE DETECTOR MARKINGS SHALL:

- BE USED WHEN A BICYCLE NEEDS TO ACTUATE A TRAFFIC SIGNAL PHASE IN ORDER TO PROCEED THROUGH AN INTERSECTION.
- NOT BE USED FOR RIGHT TURN ONLY LANES, WHEN RIGHT TURN ON RED IS PERMITTED.
- NOT BE USED FOR SECOND VEHICLE DETECTION.
- BE ACCOMPANIED BY A R10-22 BICYCLE DETECTOR SIGN.

PLACEMENT GUIDELINES:

- LOCATE NEAR THE STOP LINE.
- LOCATE TO AVOID CONFLICTS WITH OTHER MARKINGS.
- LOCATE IN THE RIGHT-MOST THROUGH LANE AND RIGHT-MOST LEFT TURN LANE.
- LOCATE ON THE LEFT SIDE OF AN INDUCTION LOOP, EXCEPT FOR THE LEFT LANE OF ONE-WAY STREETS.
- LOCATE ON THE RIGHT SIDE OF AN INDUCTIVE LOOP FOR THE LEFT LANE OF ONE-WAY STREETS.

**INDUCTIVE LOOP DETECTOR
APPLICATION**

**BIKE
DETECTOR
MARKINGS**

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


CITY ENGINEER

STD DWG

4301

8/10/2017

SHT 1 OF 2

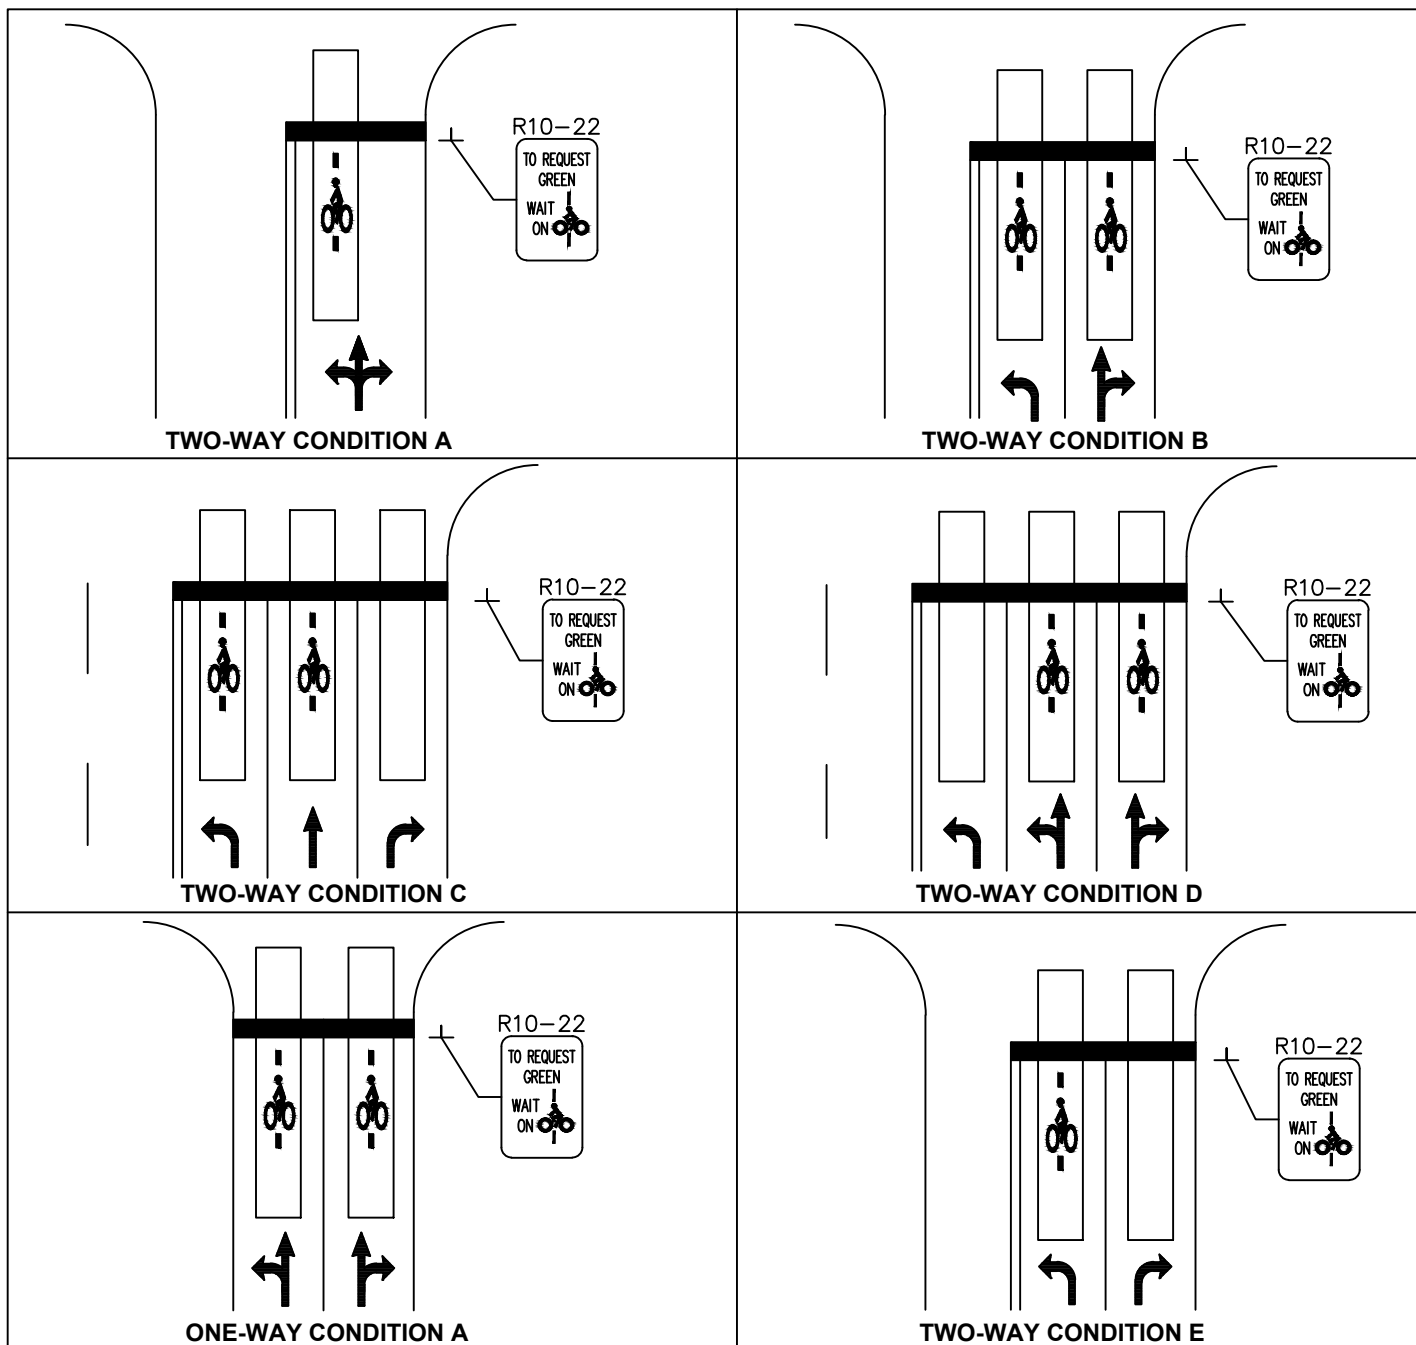

NOTES:

BICYCLE DETECTOR MARKINGS SHALL:

- BE USED WHEN A BICYCLE NEEDS TO ACTUATE A TRAFFIC SIGNAL PHASE IN ORDER TO PROCEED THROUGH AN INTERSECTION.
- NOT BE USED FOR RIGHT TURN ONLY LANES, WHEN RIGHT TURN ON RED IS PERMITTED.
- NOT BE USED FOR SECOND VEHICLE DETECTION.
- BE ACCOMPANIED BY A R10-22 BICYCLE DETECTOR SIGN.

PLACEMENT GUIDELINES:

- LOCATE NEAR THE STOP LINE.
- LOCATE TO AVOID CONFLICTS WITH OTHER MARKINGS.
- LOCATE IN THE RIGHT-MOST THROUGH LANE AND RIGHT-MOST LEFT TURN LANE.
- LOCATE IN THE HORIZONTAL CENTER OF A RADAR OR VIDEO DETECTION ZONE.

RADAR OR VIDEO DETECTION APPLICATION

**BIKE
DETECTOR
MARKINGS**


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

**STD DWG
4301**

8/10/2017

SHT 2 OF 2

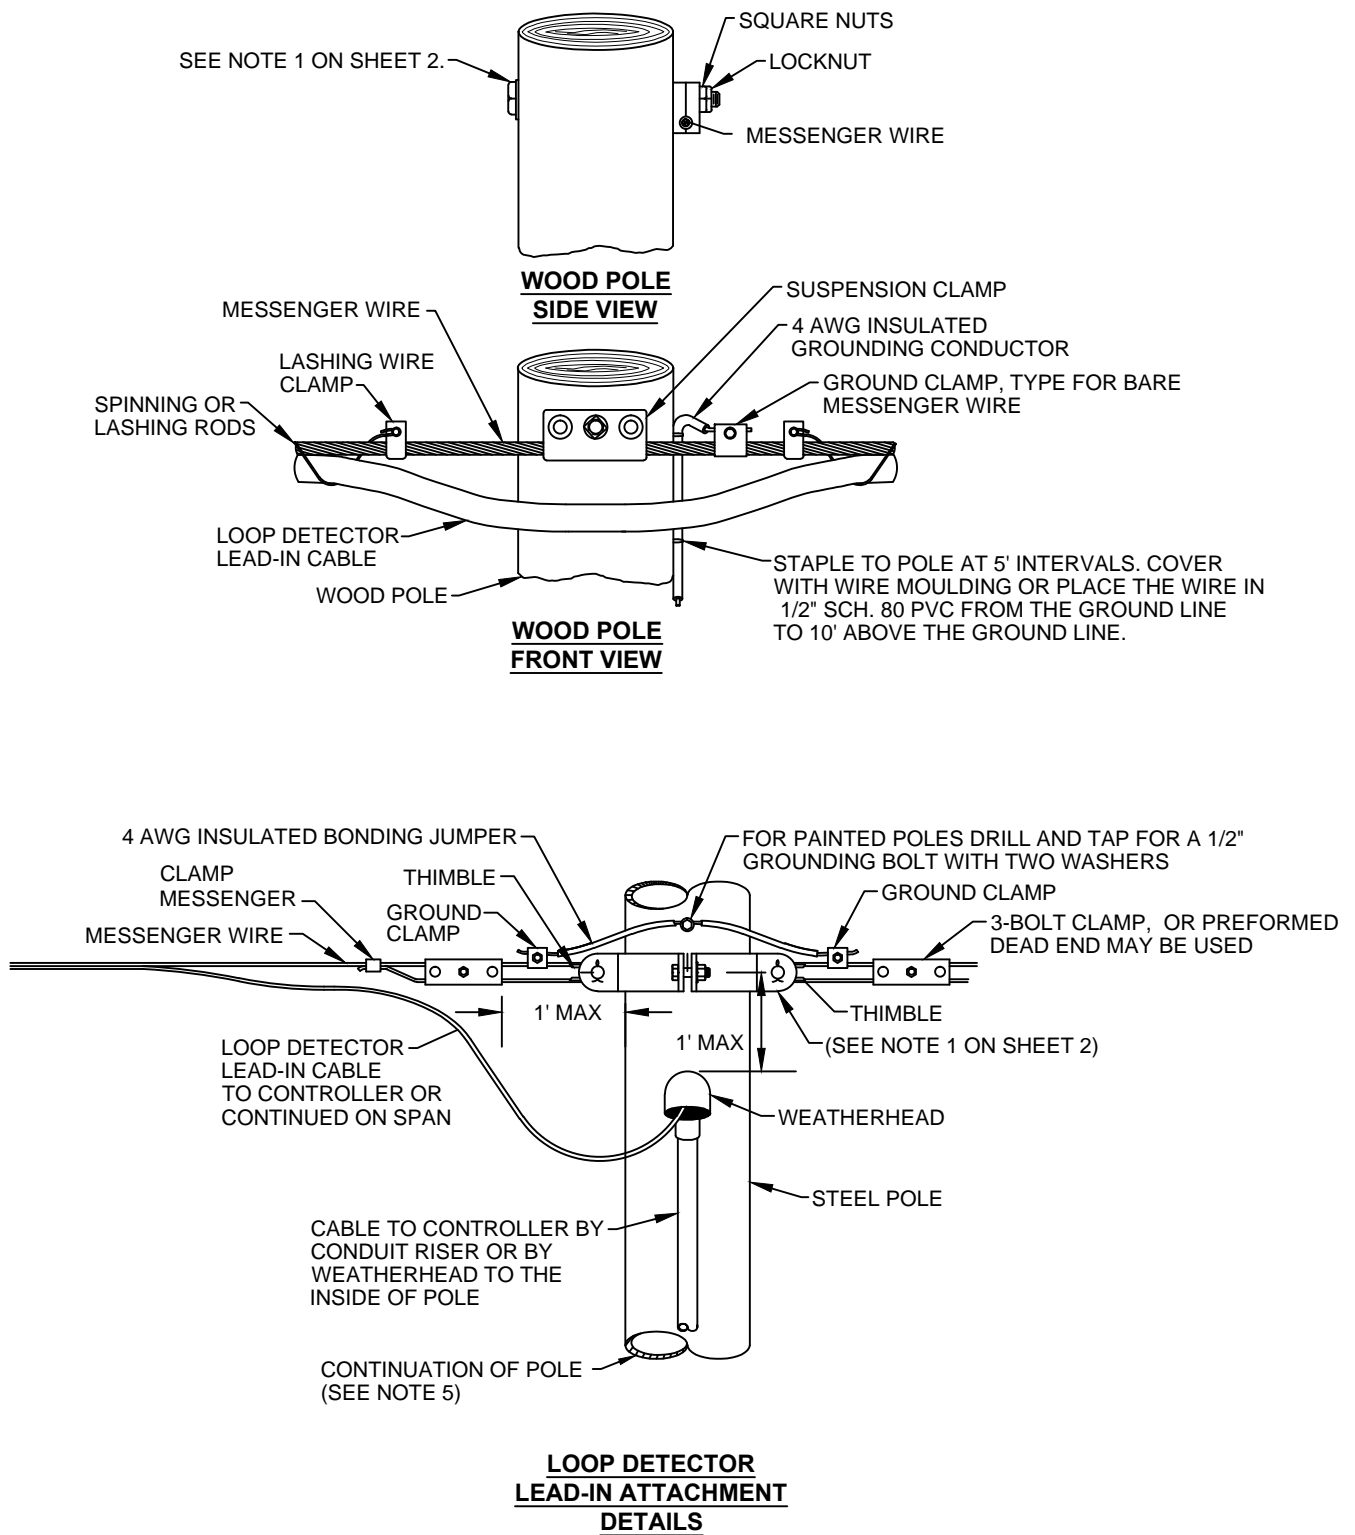

MESSENGER WIRE DETAILS I



CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4330

8/10/2017

CITY ENGINEER

SHT 1 OF 2

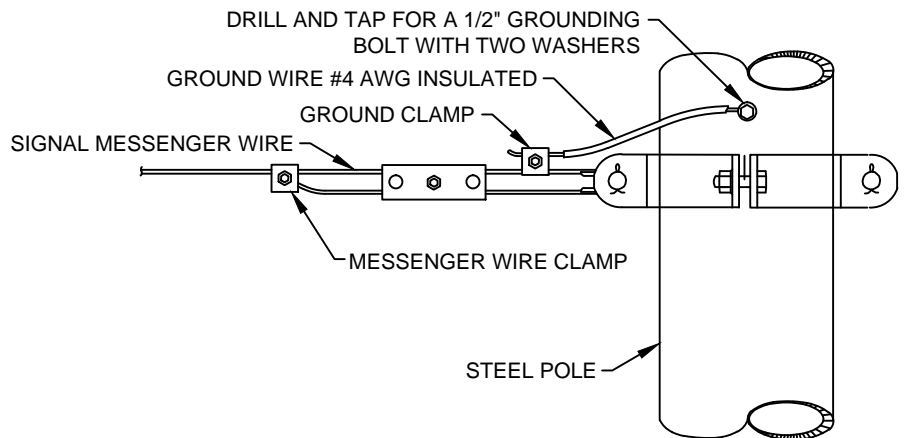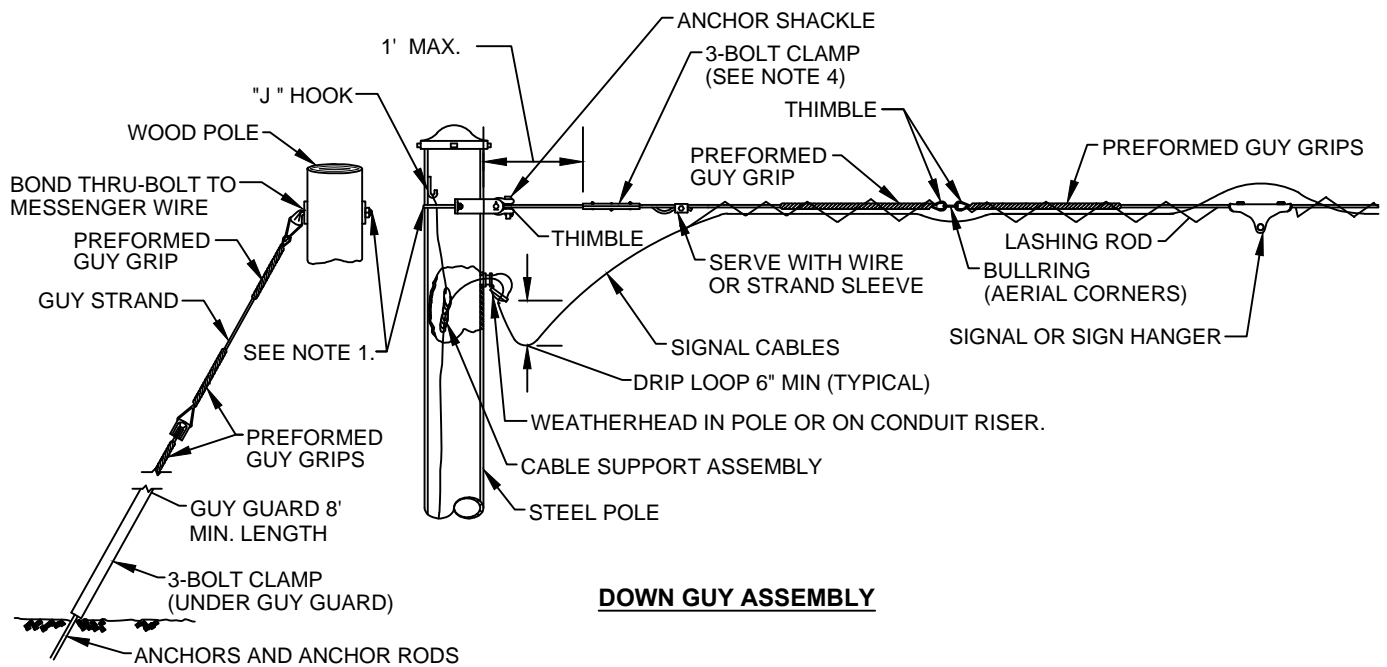

TRAFFIC SIGNAL MESSENGER WIRE GROUNDING DETAIL

NOTES:

1. MESSENGER WIRE POLE ATTACHMENT SHALL BE BY A POLE CLAMP ON STEEL POLES AND BE A 5/8" THRU-BOLT (OR THIMBLE-EYE BOLT) WITH WASHERS ON WOOD POLES.
2. THE LOOP DETECTOR LEAD-IN CABLE SHALL HAVE A SAG BETWEEN 3% AND 5% OR MATCH EXISTING UTILITY LINES.
3. THE POWER SERVICE MESSENGER WIRE SHALL BE GROUNDED AT THE FIRST AND LAST POLES IN A CABLE RUN AND AT INTERVALS NOT TO EXCEED 1200 FEET. WHEN ATTACHED TO WOOD POLES, THE MESSENGER WIRE SHALL BE GROUNDED BY BONDING TO AN EXISTING GROUND ROD. THE MESSENGER WIRE SHALL BE BONDED TO GROUNDED STEEL POLES BY USE OF A 1/2" BOLT, DRILLED AND TAPPED INTO THE POLE.
4. THE MINIMUM 3-BOLT CLAMP SHALL BE 6 INCH LONG WITH 1/2" DIAMETER BOLTS. PREFORMED GUY GRIPS SHALL NOT BE USED TO ATTACH THE MESSENGER WIRE TO THE SIGNAL POLES. THEIR USE IS LIMITED TO BULLRING ATTACHMENTS.
5. FOR CONTINUATION OF POLE SEE CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4050.

MESSENGER WIRE DETAILS I


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
4330

8/10/2017

CITY ENGINEER

SHT 2 OF 2

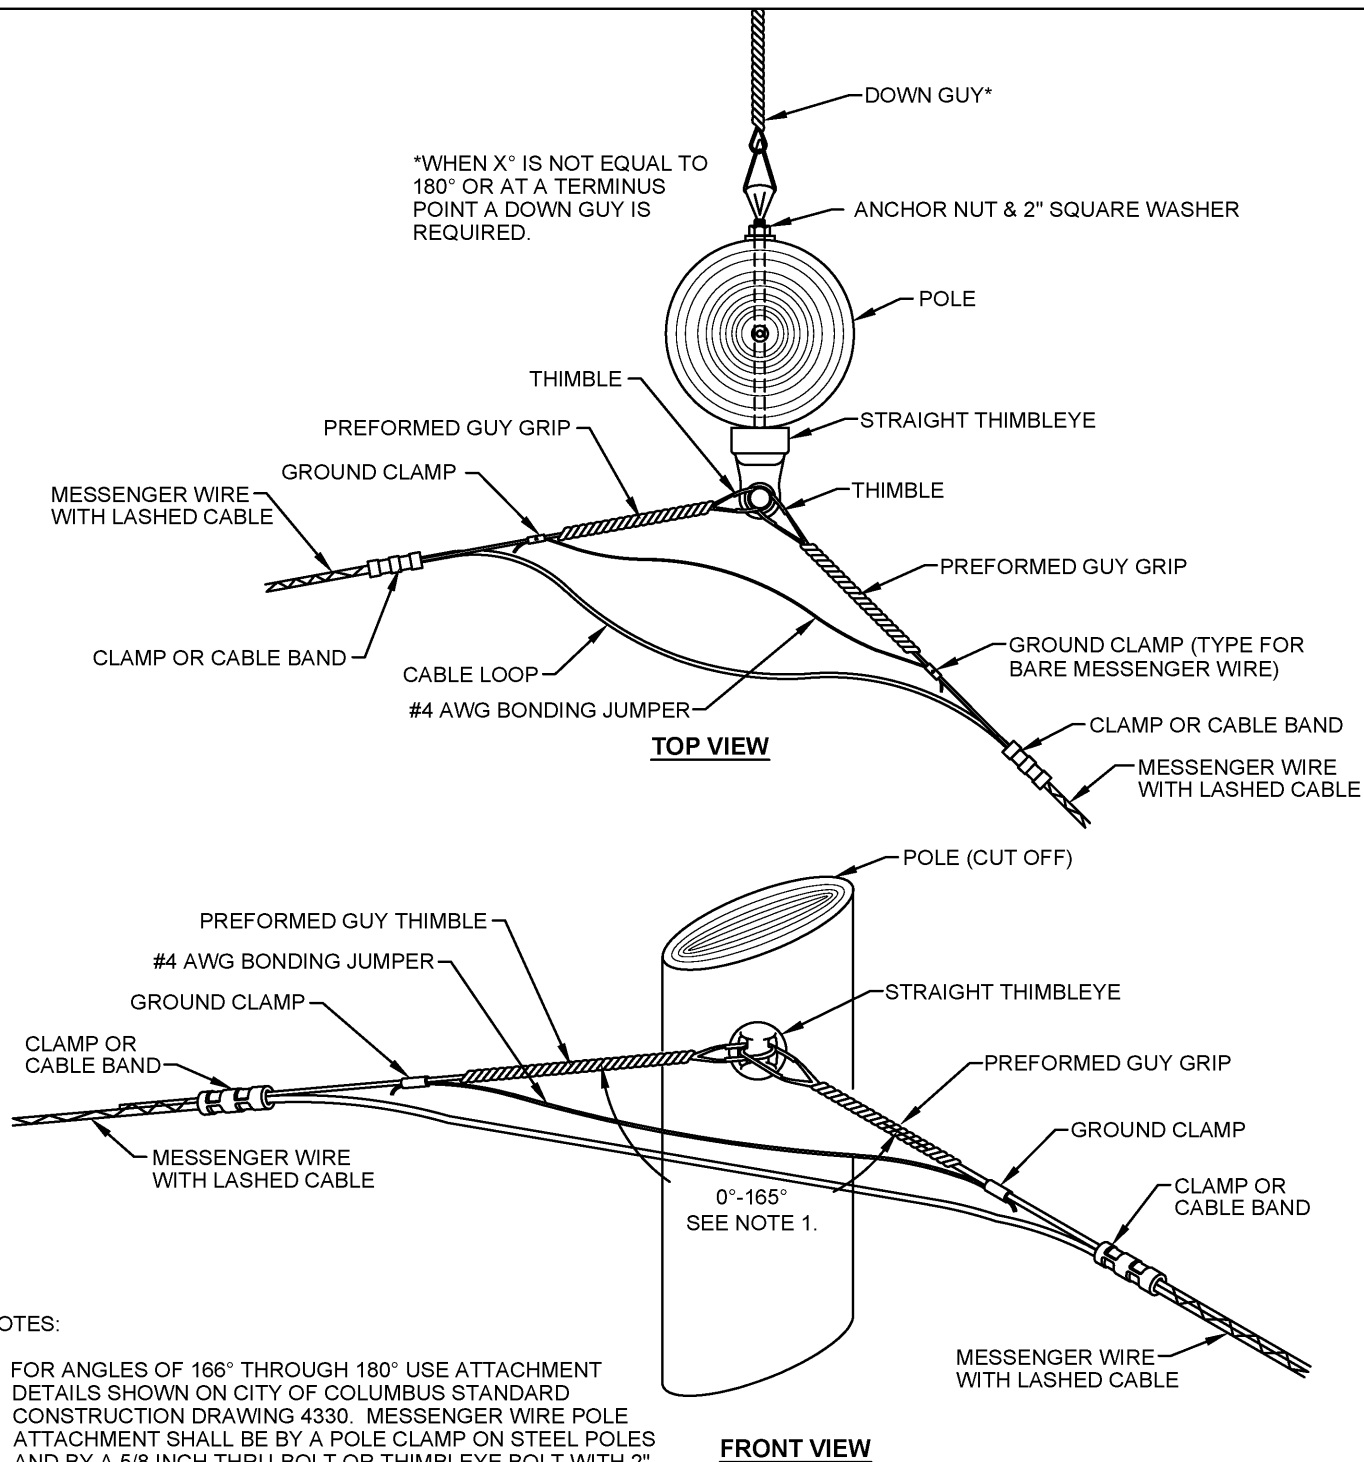

NOTES:

1. FOR ANGLES OF 166° THROUGH 180° USE ATTACHMENT DETAILS SHOWN ON CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4330. MESSENGER WIRE POLE ATTACHMENT SHALL BE BY A POLE CLAMP ON STEEL POLES AND BY A 5/8 INCH THRU-BOLT OR THIMBLEYE BOLT WITH 2" SQUARE WASHERS ON WOOD POLES.
2. POWER SERVICE MESSENGER WIRE SHALL BE ELECTRICALLY GROUNDED AT THE FIRST AND LAST POLES IN A CABLE RUN AND AT INTERVALS NOT TO EXCEED 1200 FEET.
3. WHEN ATTACHED TO WOOD POLES, THE MESSENGER WIRE SHALL BE GROUNDED BY BONDING TO EXISTING SIGNAL GROUND WIRE OR CONNECTION TO A GROUND ROD. THE MESSENGER WIRE SHALL BE BONDED TO GROUNDED STEEL POLES BY USE OF A 1/2" BOLT, DRILLED AND TAPPED INTO THE POLE.
4. LOOP DETECTOR LEAD-IN CABLE SHALL HAVE A SAG TO MATCH THE EXISTING UTILITY LINES OR WHEN NO EXISTING LINES A SAG OF 3% TO 5%.
5. GROUNDING OF POLES SHALL BE AS SHOWN ON CITY OF COLUMBUS STANDARD CONSTRUCTION DRAWING 4330.

MESSENGER WIRE DETAILS II

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
4331

5/01/2014

SHT 1 OF 1