

\* VARIABLE - 2' MIN, 18' MAX

EYEBROW SHALL HAVE CONTINUOUS POSITIVE DRAINAGE TO STREET

\*\* TRANSITION FROM THE CURB SHAPE OF THE STREET TO MOUNTABLE CURB SCD 2030, ENSURING THE GUTTER LINE MAINTAINS FLOW

JOINT SPACING DETAIL

EYEBROW

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG


2154

*[Signature]*

07/01/20

CITY ENGINEER

SHT 1 OF 2

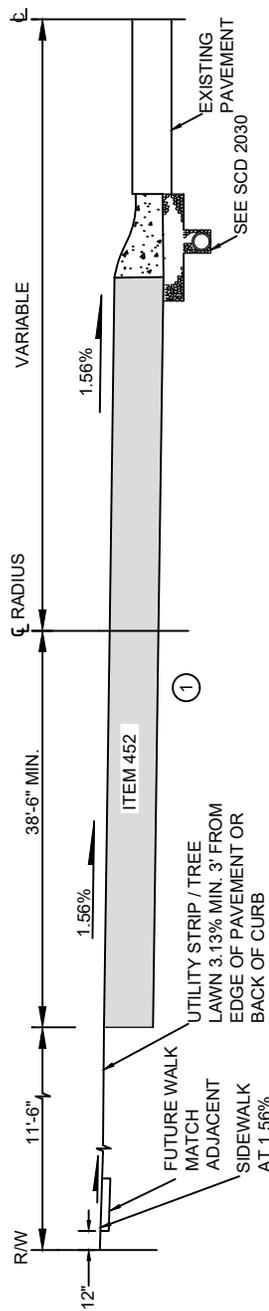

ENLARGED SECTION A-A

① ITEM 452 - 7" NON-REINFORCED CONCRETE PAVEMENT.

TYPICAL SECTION  
COMBINATION CURB &  
GUTTER, TYPE MOUNTABLE

EYEBROW

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

2154

07/01/20

SHT 2 OF 2