



REVISED 6/25/14

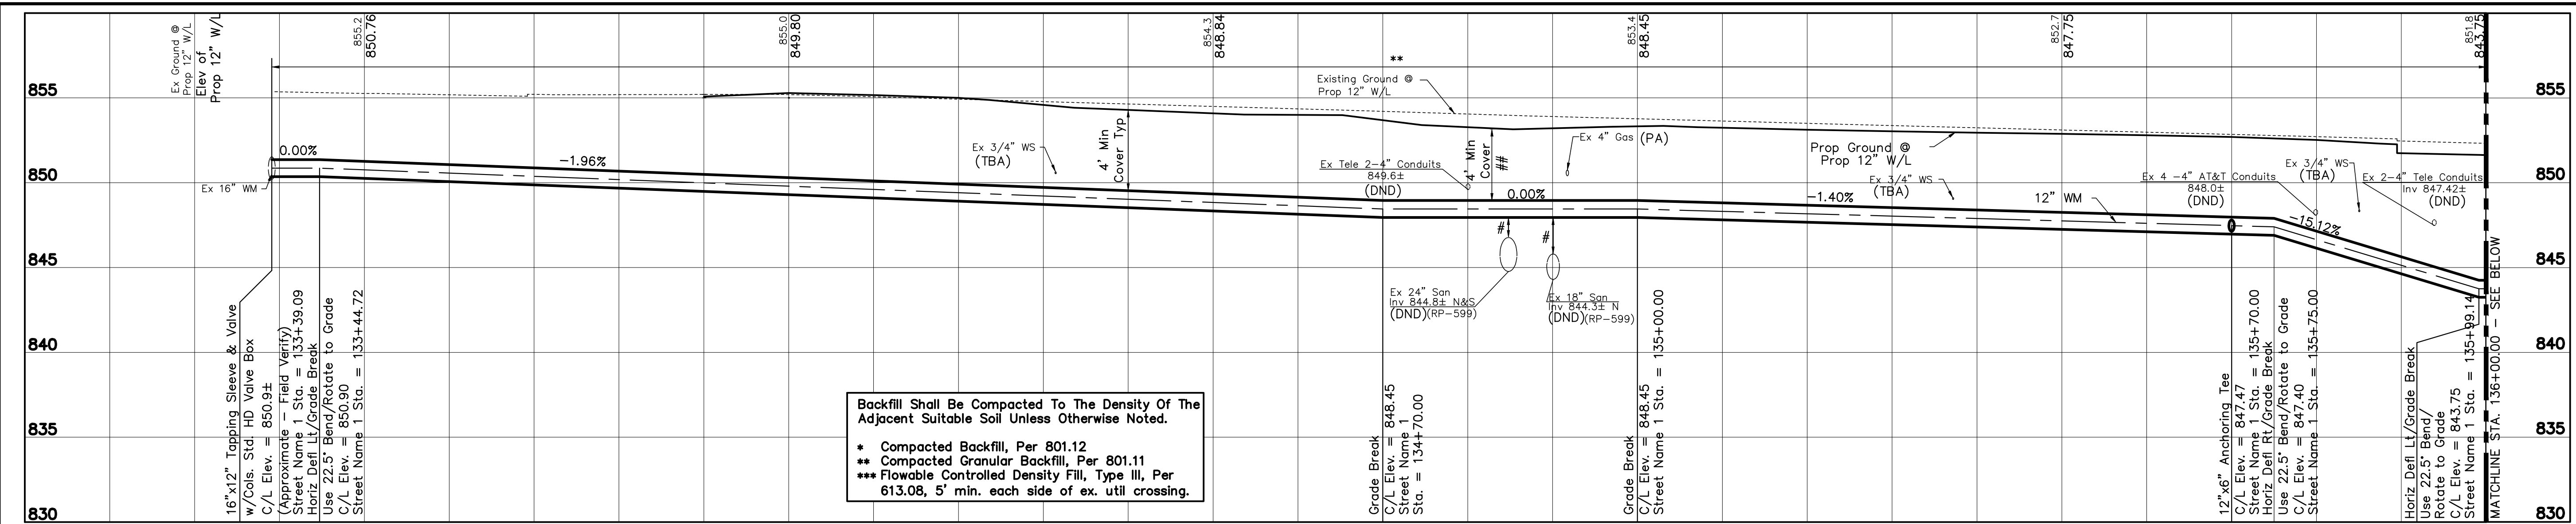


Backfill Shall Be Compacted To The Density Of The Adjacent Suitable Soil Unless Otherwise Noted.

- * Compacted Backfill, Per 801.12
- ** Compacted Granular Backfill, Per 801.11
- *** Flowable Controlled Density Fill, Type III, Per 613.08, 5' min. each side of ex. util crossing.

NOTE TO CONSULTANTS:
SCALE OF PROFILE SHOULD MATCH PLAN VIEW

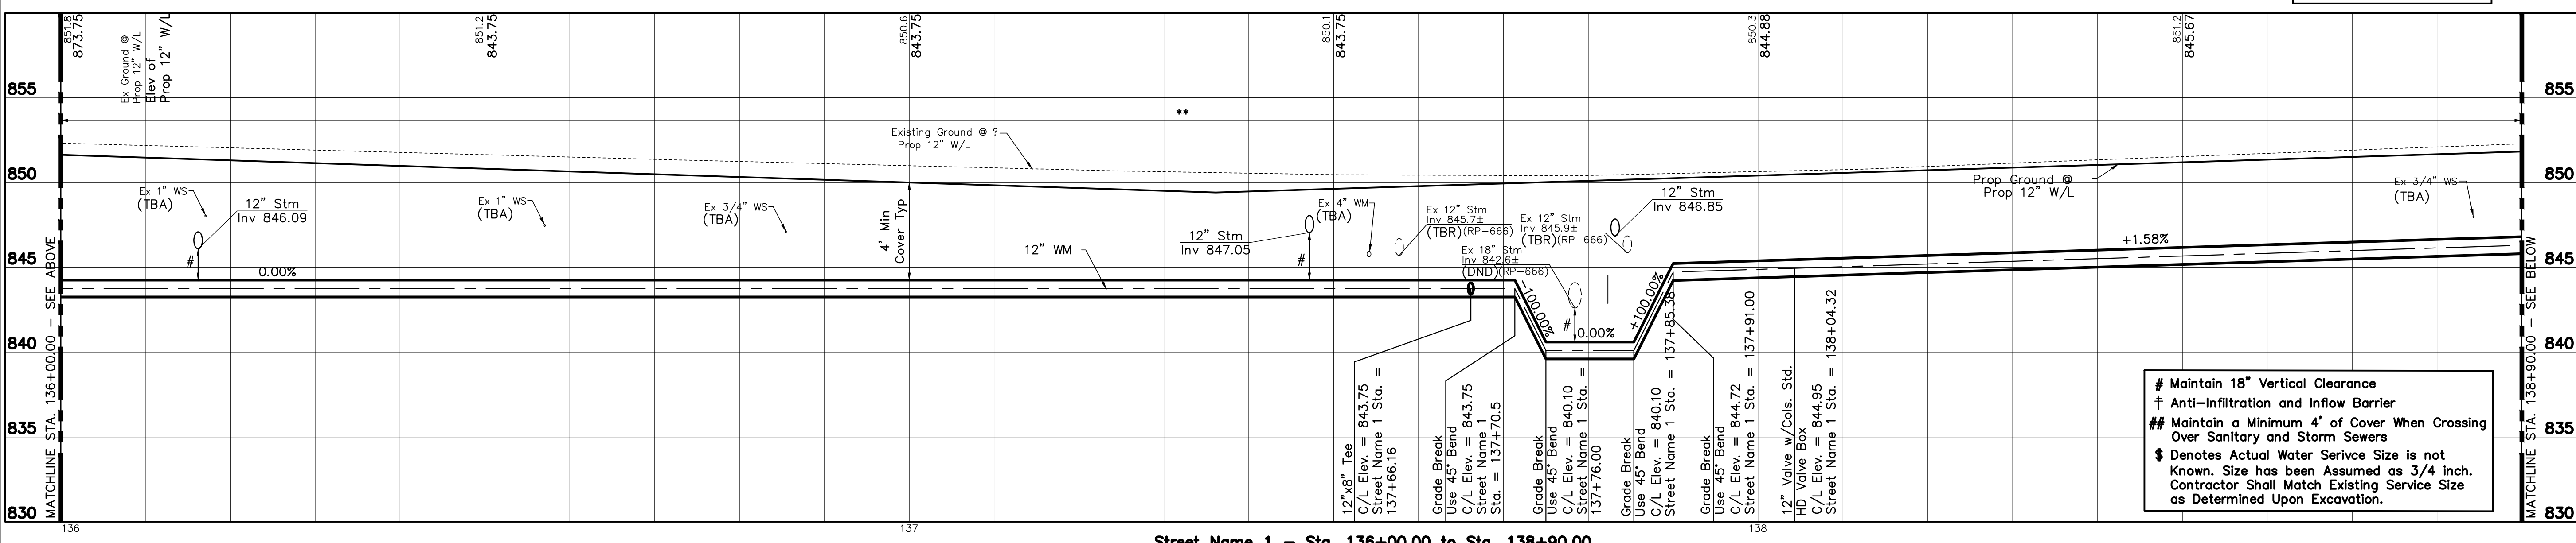

- # Maintain 18" Vertical Clearance
- † Anti-Infiltration and Inflow Barrier
- ** Maintain a Minimum 4' of Cover When Crossing Over Sanitary and Storm Sewers
- ‡ Denotes Actual Water Service Size is not Known. Size has been Assumed as 3/4 inch. Contractor Shall Match Existing Service Size as Determined Upon Excavation.

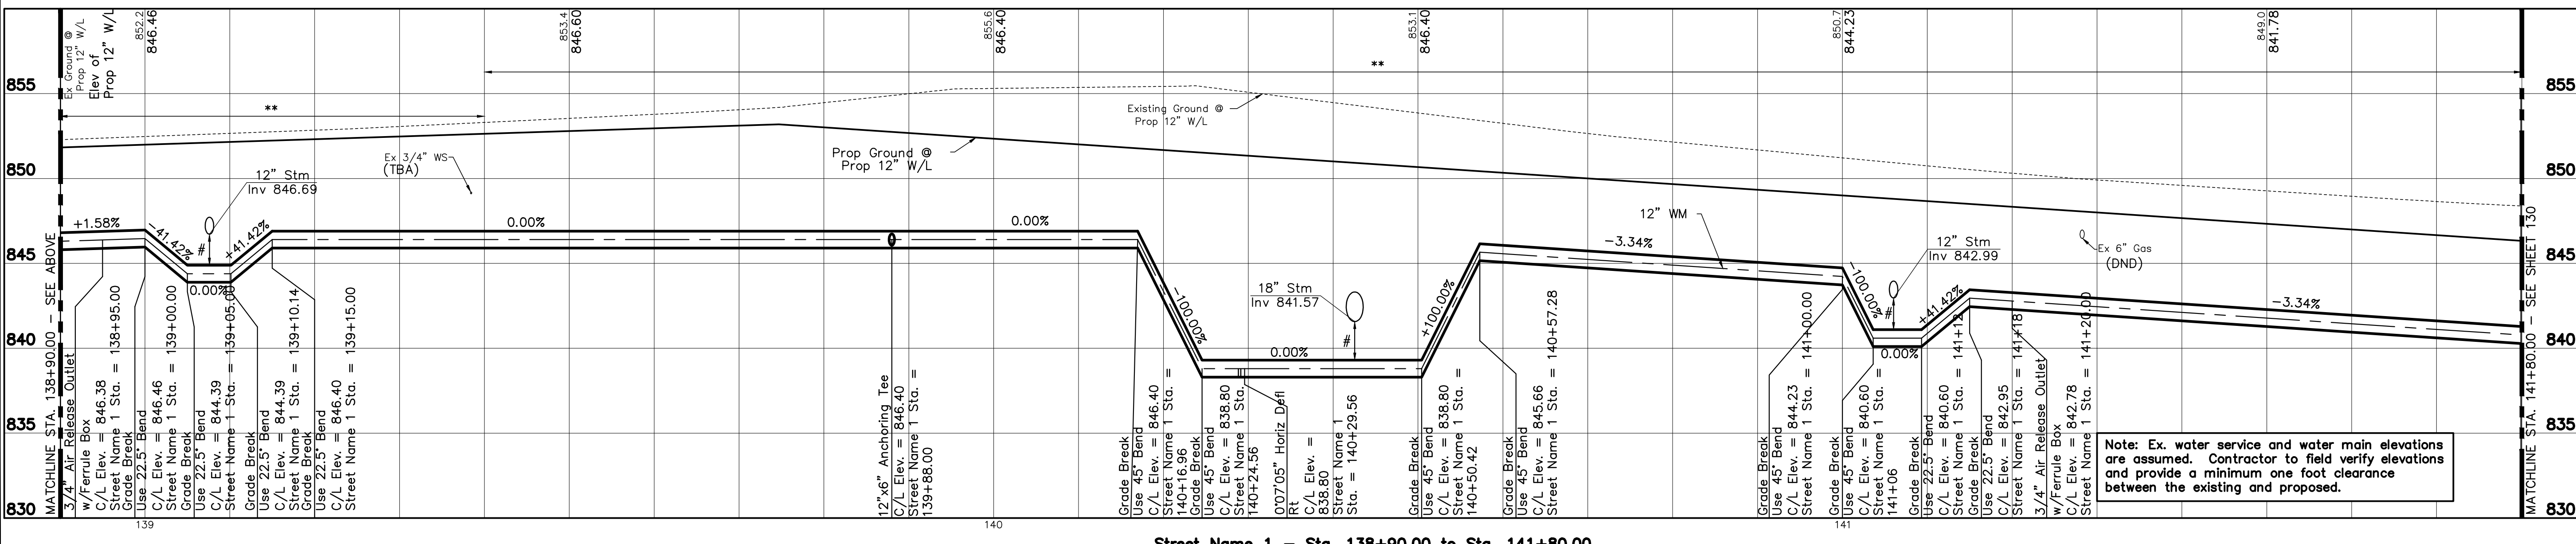

Note: Ex. water service and water main elevations are assumed. Contractor to field verify elevations and provide a minimum one foot clearance between the existing and proposed.



HORIZ. SCALE: 1" = 10'

VERTICAL SCALE: 1" = 5'

CALCULATED

CHECKED

PROJECT NAME

XXXX-E

WATER PROFILE - STREET NAME 1 - STA. 133+39.44 TO STA. 141+80.00