

## SPAN GUY

### I. Quantity

The base bid shall include the indicated number of span guys supplied and installed as hereafter specified.

### II. Material

- a. The material shall be as listed on Drawing 03S0027.
- b. Pole - The pole, if required, shall be quoted on and will be paid for under a separate item.
- c. Hardware - All hardware shall be hot dipped galvanized steel.


### III. Installation

The span guy shall be installed as indicated on drawing 03S0027.

- a. Tension - Guy tension shall be in accordance with the requirements of the line.
- b. Bracing - Down Guy or Pole Key Anchor shall be installed on the guy pole if shown on the drawing or indicated in the field by the engineer. The Down Guy or Pole Key Anchor shall be quoted and paid for as separate items.

### IV. Quotation

The span guy furnished and installed as hereinbefore specified shall be quoted as a unit price each in the appropriate place of this document.

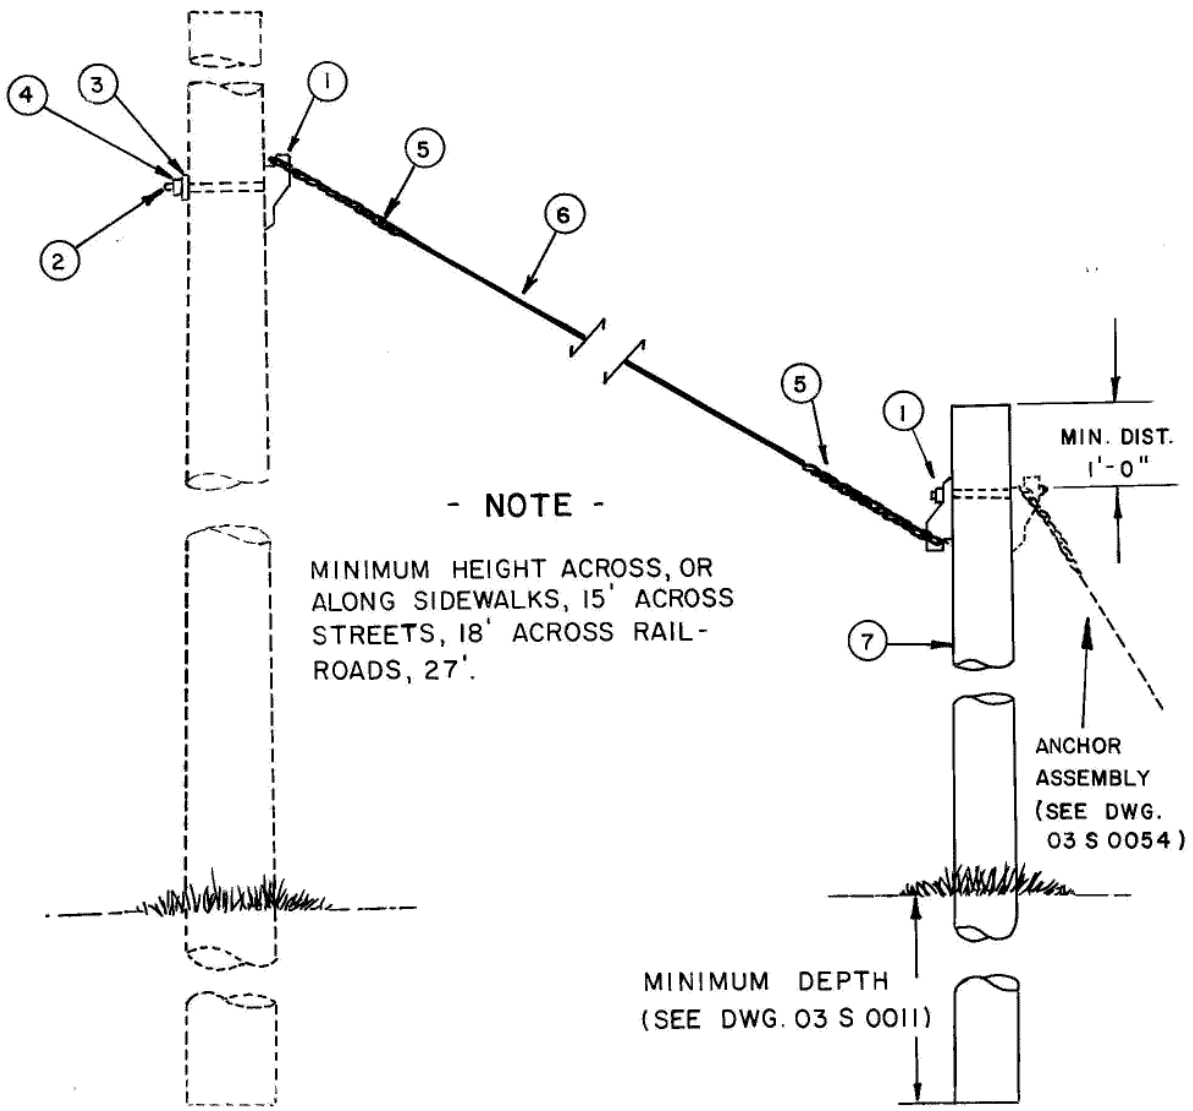

ITEM	PART NO.	NO. REQ'D	DESCRIPTION
1		2	HOOK, GUY, FOR 5/8" OR 3/4" BOLT
2		2	BOLT, MACHINE 5/8" X 12"
3		2	WASHER, CURVED, SQUARE, 13/16" HOLE
4		2	WASHER, SPRING LOCK, 13/16" HOLE
5		2	GRIP, GUY, FOR 3/8" STRAND
6		AS REQ'D	WIRE, GUY, 3/8" HIGH STRENGTH 7 STRAND STEEL
7		1	POLE, IF SPECIFIED

REVISIONS 16-12-80	MEL & P	MUNICIPAL ELECTRIC LIGHT & POWER SYSTEM CITY OF COLUMBUS, OHIO		
	DEPT. OF PUBLIC SERVICE		DIV. OF ELECTRICITY	
	SPAN GUY ASSEMBLIES WITH STUB			
	SCALE	DRAWN	DRAWING NO.	
PROJECT NO.	APPROVED	03 S 0027	SHEET   OF	

DRAWN LSZ 12/80  
 APPROVED **B 12-80**