

NOTE:

1. FOR GROUPS OF TREES:

A. PLACE THE BARRICADES AT THE DRIPLINE AROUND THE GROUPS PERIMETER.

2. INSTALLATION OF TREE PROTECTION BARRICADES SHALL BE PERFORMED BEFORE ANY SITE DEVELOPMENT ACTIVITY TAKES PLACE.

3. THE TREE PROTECTION BARRICADES SHALL REMAIN IN PLACE THROUGHOUT THE CONSTRUCTION PHASE AND UNTIL ALL SITE DEVELOPMENT ACTIVITIES ARE FULLY COMPLETE.

4. ANY DAMAGE THAT MAY OCCUR TO THE BARRICADES SHALL BE REPAIRED OR REPLACED TO THE ORIGINAL SPECIFICATIONS WITHIN 24 HOURS OF THE DAMAGE OCCURRING.

5. THE AREA WITHIN THE TREE PROTECTION BARRICADES SHALL NOT BE USED FOR THE STORAGE OF ANY MATERIALS, SUPPLIES OR DEBRIS OR THE DISPOSAL OF ANY SOLID, LIQUID OR GASEOUS MATERIALS THAT COULD CAUSE HARM TO THE TREES.


6. ANY TREE SCHEDULED TO REMAIN IF DAMAGED DURING CONSTRUCTION SHALL BE REPLACED BY PROVIDING EQUIVALENT MONETARY VALUE TO THE CITY'S TREE FUND.

7. MONETARY TREE VALUE SHALL BE DETERMINED BY USING THE GUIDE FOR PLANT APPRAISAL, PUBLISHED BY THE INTERNATIONAL SOCIETY OF ARBORICULTURE OR OTHER SOURCES AS DETERMINED BY THE CITY FORESTER.



8. BARRICADES SHALL PROTECT ALL TREES SCHEDULED TO REMAIN BEFORE AND DURING ALL CONSTRUCTION ACTIVITIES.

9. ANY PROPOSED UNDERGROUND UTILITIES SHALL BE ROUTED AROUND PROTECTED TREES TO THE OUTSIDE OF THE TREE'S DRIPLINE. IF THIS IS NOT FEASIBLE, AS DETERMINED BY THE COUNTY, A SLEEVE MAY BE USED UNDER THE TREE, PROVIDED THAT ALL ACCEPTABLE HORTICULTURAL/ARBORICULTURAL PRACTICES ARE ADHERED TO.

\*TREE PROTECTION BARRICADES SHALL BE LOCATED TO PROTECT A MINIMUM OF 75% OF THE CRITICAL PROTECTION ZONE.

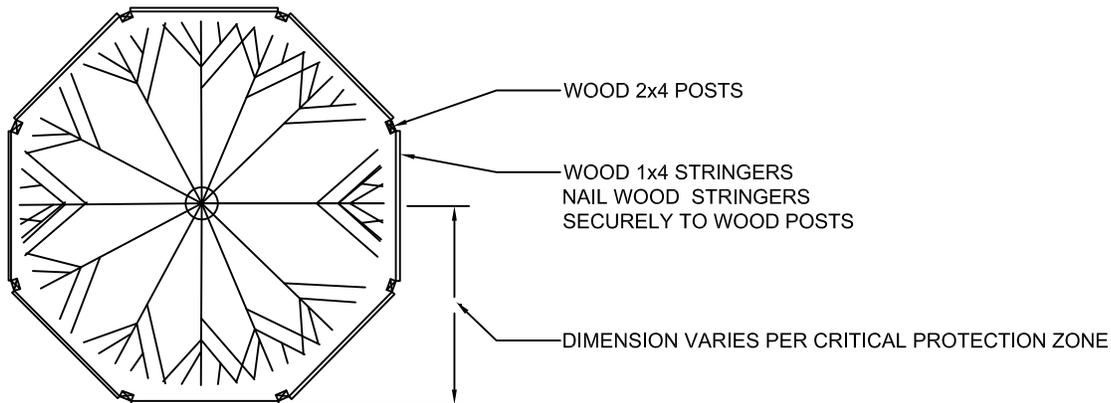

NOTE: FOR GROUPS OF TREES  
PLACE BARRICADES BETWEEN  
TREES AND CONSTRUCTION  
ACTIVITY

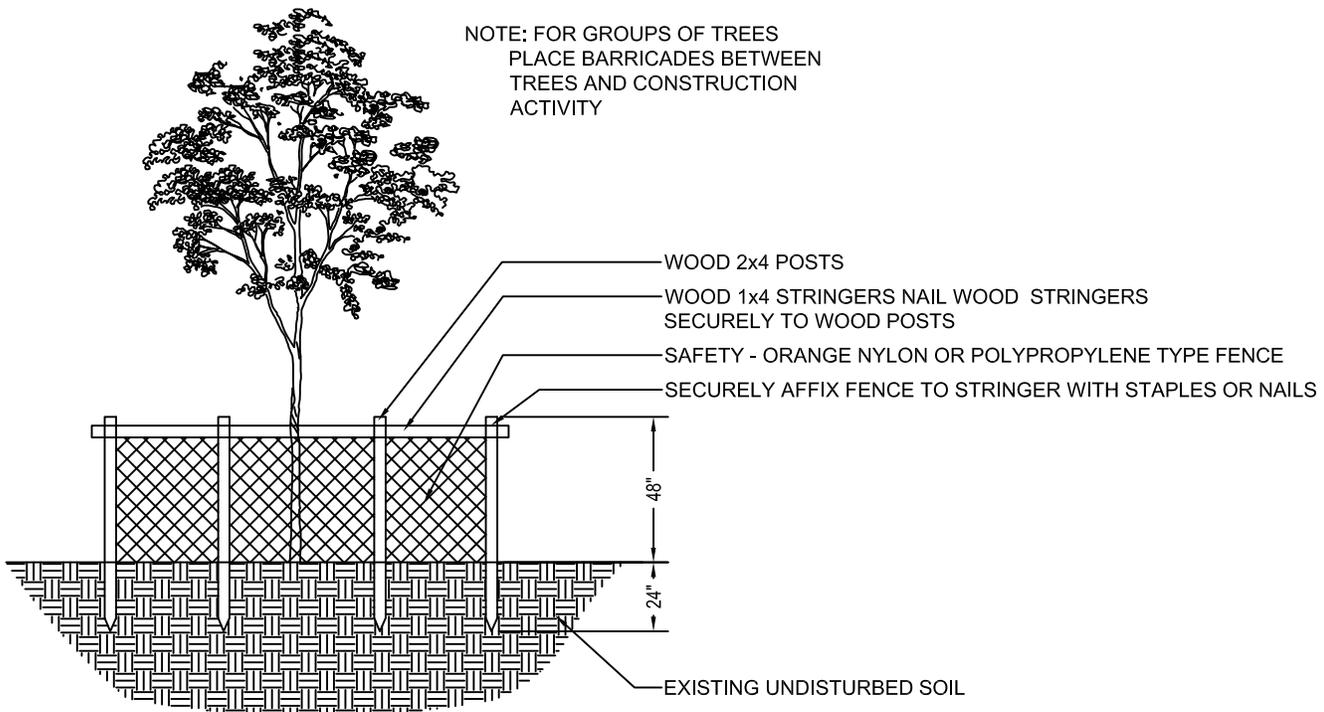

## Tree Protection Detail

N.T.S.