


TYPE "B": Long Side Bend to Tee.
 TYPE "B" MODIFIED: Short Side Bend to Tee.

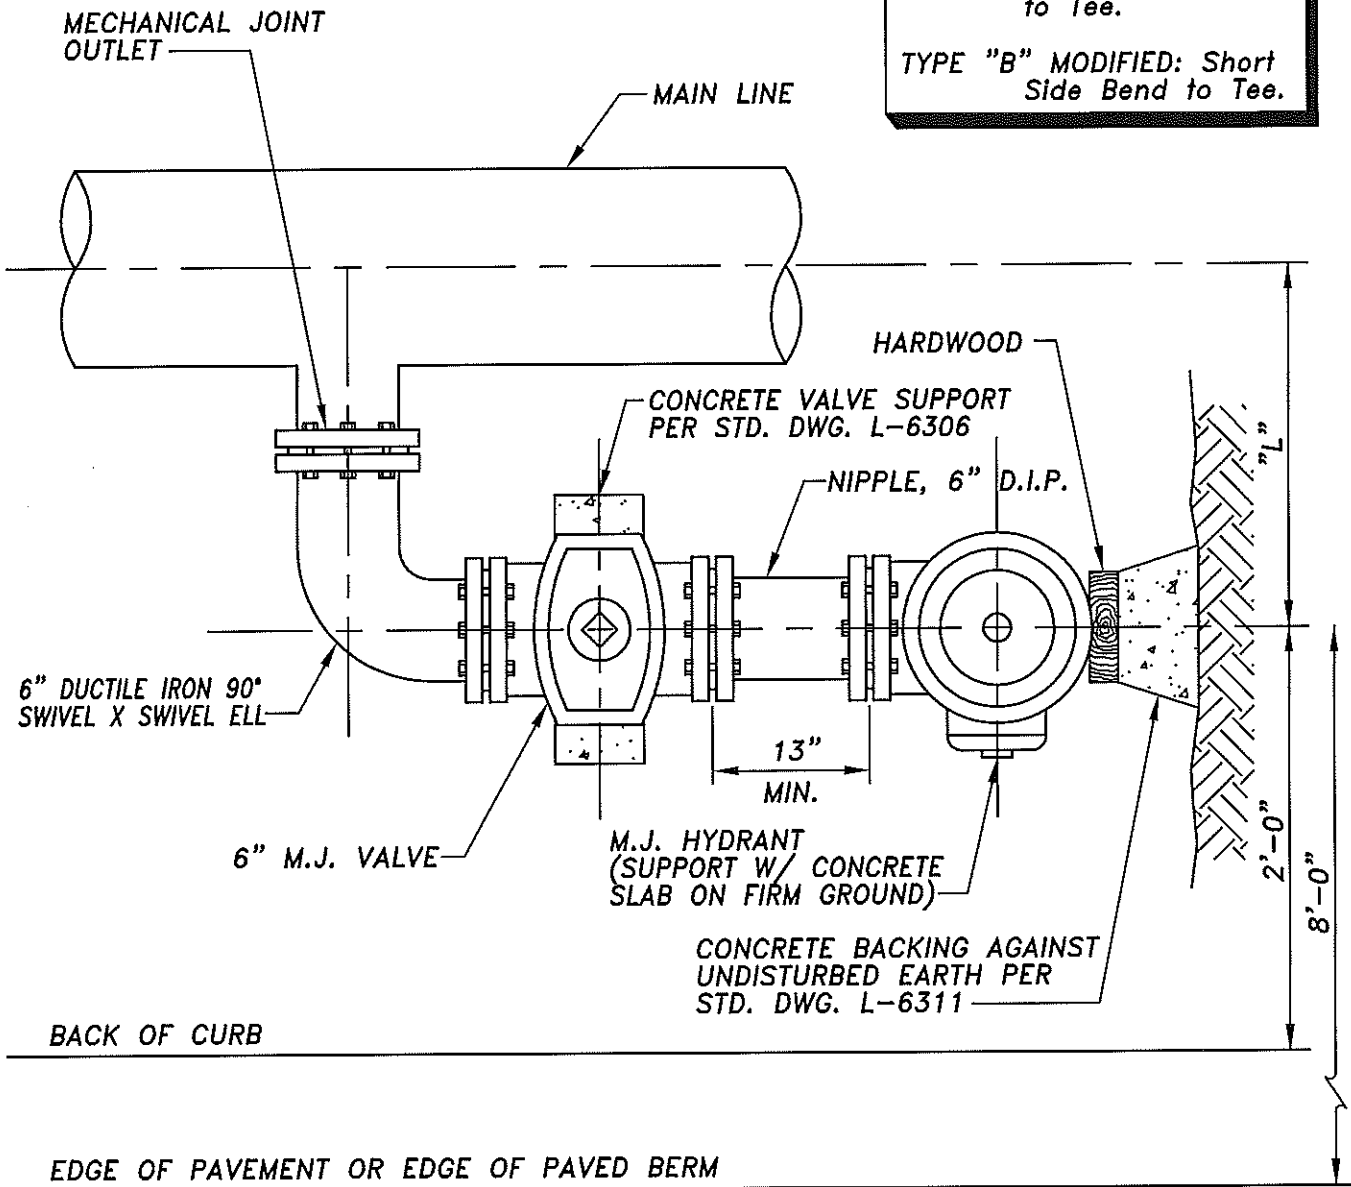

EDGE OF PAVEMENT OR EDGE OF PAVED BERM

MAIN LINE	DIMENSION "L"	
	TYPE "B"	TYPE "B" MOD.
20"	33"	28"
24"	36"	31"
30"	39"	34"
36"	43"	38"
42"	46"	41"
48"	49"	44"

NOTES:

1. FIRE HYDRANT SHALL HAVE A MAXIMUM BURY OF 7'-0". MODIFICATION OF THE HYDRANT LEAD TO MEET THIS REQUIREMENT SHALL BE IN THAT SECTION FROM THE VALVE TO THE HYDRANT AS PER STANDARD DETAIL L-7601.
2. FIRE HYDRANTS SHALL BE SET A MINIMUM OF 6' FROM ALL DRIVEWAY OPENINGS.
3. TEE USED TO CONNECT HYDRANT LEAD TO WATER MAIN IS INCLUDED IN COST OF ITEM 809, FIRE HYDRANT.

L-6409 B.Dwg Revision Date: 1/2/13

CITY OF COLUMBUS
 DEPARTMENT OF PUBLIC UTILITIES
 DIVISION OF WATER

APPROVED: *R.C. Westerfield* 5-15-13
 ADMINISTRATOR DATE

STANDARD DETAIL
TYPICAL HYDRANT SETTING
 TYPE "B" AND "B" MODIFIED
 FOR CONCRETE AND STEEL PIPE

