

\* 20' RADIUS IF 200' OR LESS FROM CENTERLINE OF STREET TO CENTERLINE OF TURNAROUND.

\*\* TAPER CURB 6" TO 1".

UNDERDRAIN SHALL BE SLOPED FOR POSITIVE DRAINAGE TO CURB INLET.

R/W AND EASEMENTS FOR T-TURNAROUND TO BE DETERMINED DURING SITE DEVELOPMENT PHASE AND PLATTING PROCESS.

## T - TURNAROUND

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER


STD DWG  
**2157**

6/1/13

SHT 1 OF 3



SHT 2 OF 3

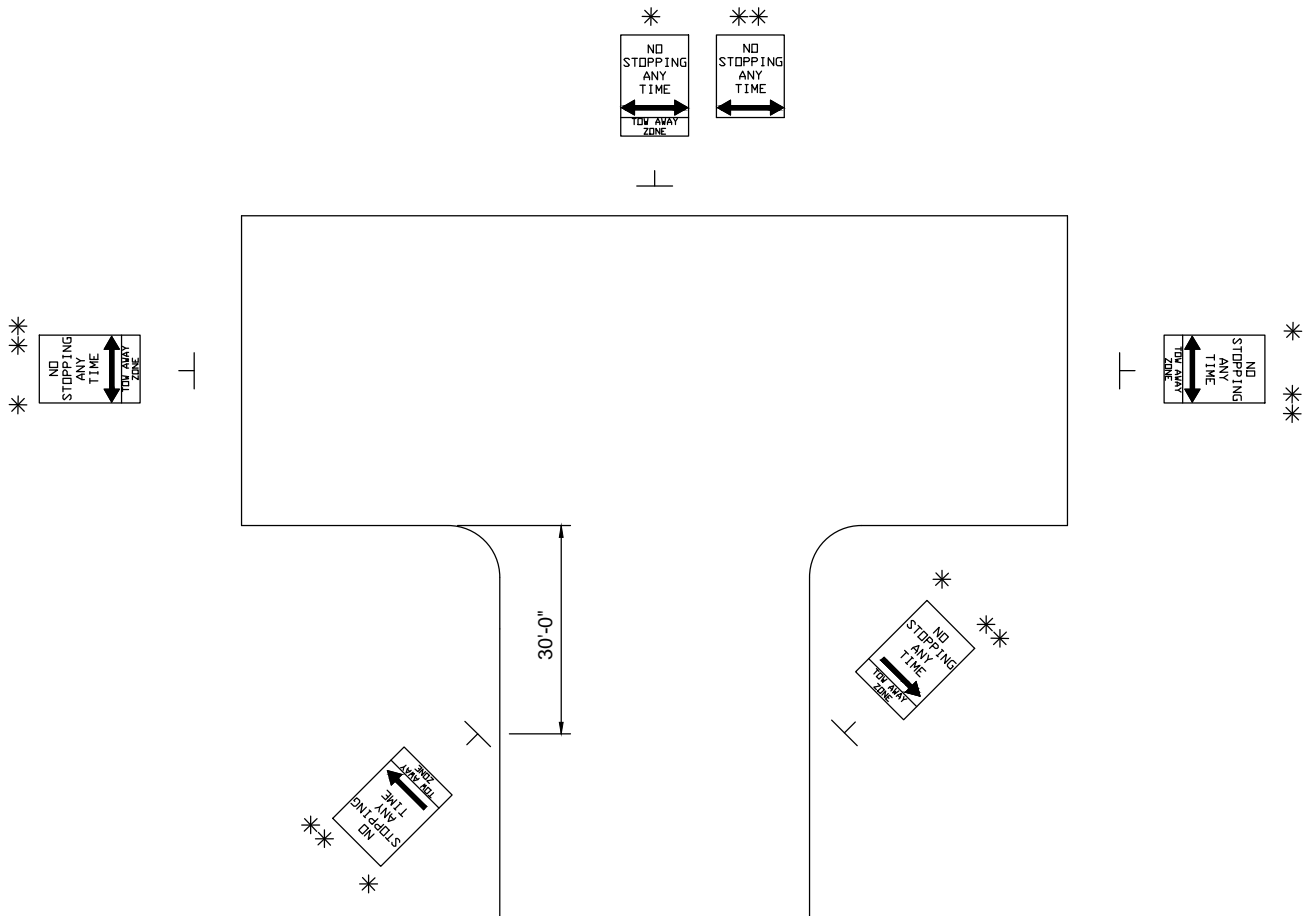

SIGNING SHALL BE INSTALLED TO KEEP  
TURNAROUND CLEAR FOR EMERGENCY VEHICLES.  
SIGNS ARE TO BE REMOVED IF AND WHEN THE  
STREET IS CUT THROUGH.

REFERENCE SUPPLEMENTAL SPECIFICATIONS 1630.

\* FOR USE ON  
PRIVATE STREETS  
ONLY



CP-116.16 (L)(R)(D)  
12"x 24"

\*\* FOR USE ON PUBLIC R/W



CP-114.01 (L)(R)(D)  
12"x 18"

└ U-CHANNEL DRIVE POST

## SIGNING

# T - TURNAROUND

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

2157

6/1/13

SHT 3 OF 3