

JOINT LOCATIONS

TRANSITION SECTION TO BE USED WHEN WIDTH OF CONCRETE BASE MATERIAL IS LESS THAN 36".

IF LENGTH L IS GREATER THAN 9 FEET, SAW IN EQUAL SEGMENTS 5 FEET TO 9 FEET LONG.

TRANSITION SECTION FOR CONCRETE PAVEMENT


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

CITY ENGINEER

STD DWG
2171

6/1/13

SHT 1 OF 2

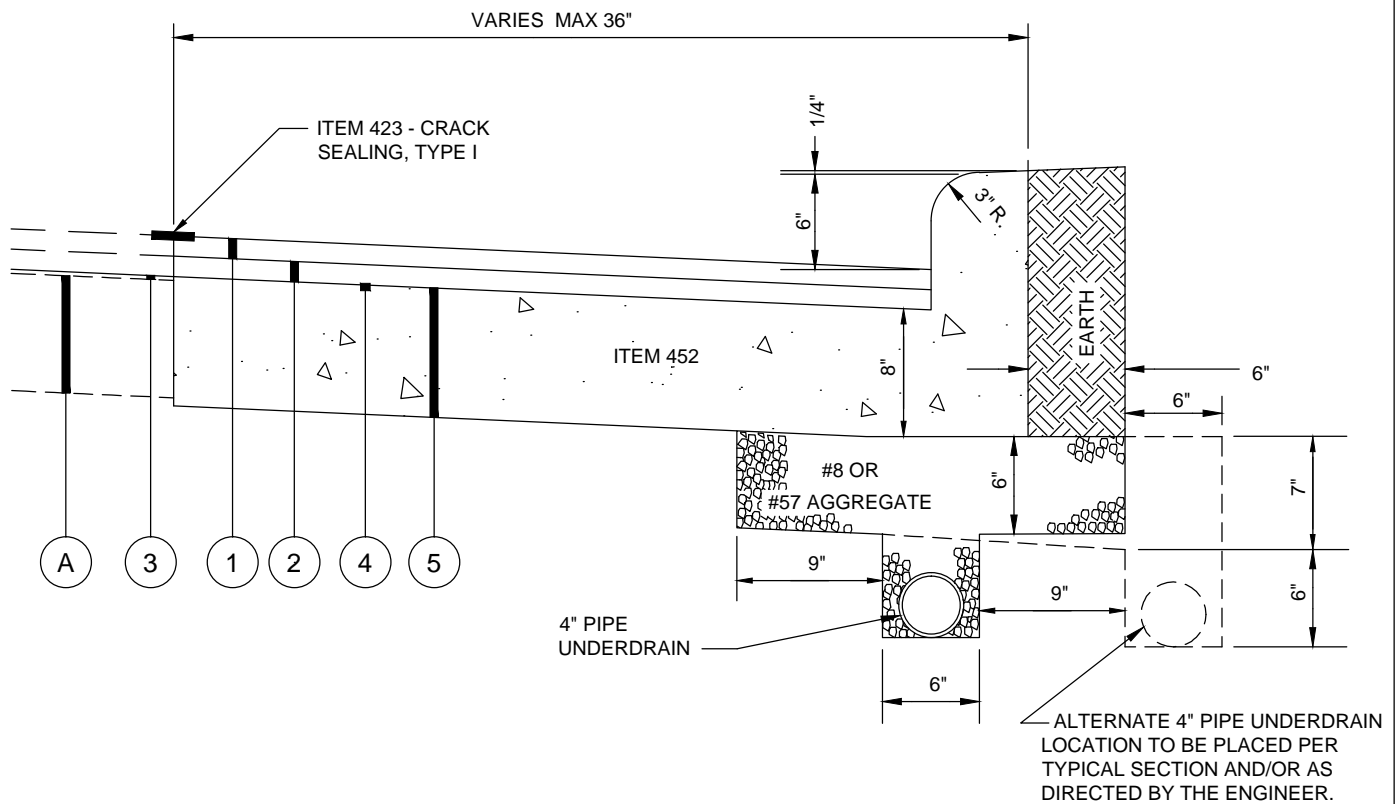

- (A) EXISTING PAVEMENT (VARIES)
- (1) ITEM 448 -1.25" ASPHALT CONCRETE, SURFACE COURSE
- (2) ITEM 448 -1.5" ASPHALT CONCRETE, INTERMEDIATE COURSE
- (3) ITEM 448 - ASPHALT CONCRETE LEVELING COURSE AS NEEDED
- (4) ITEM 407 -TACK COAT (W/ COVER AGGREGATE, IF REQUIRED)
- (5) ITEM 452 - 8" NON-REINFORCED CONCRETE PAVEMENT WITH INTEGRAL CURB

ITEM 448 - PRE-LEVELING COURSE, TO BE USED FOR CROWN CORRECTION IF NECESSARY.

SECTION A - A

TRANSITION SECTION FOR CONCRETE PAVEMENT

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

2171

6/1/13

SHT 2 OF 2