


TOP VIEW

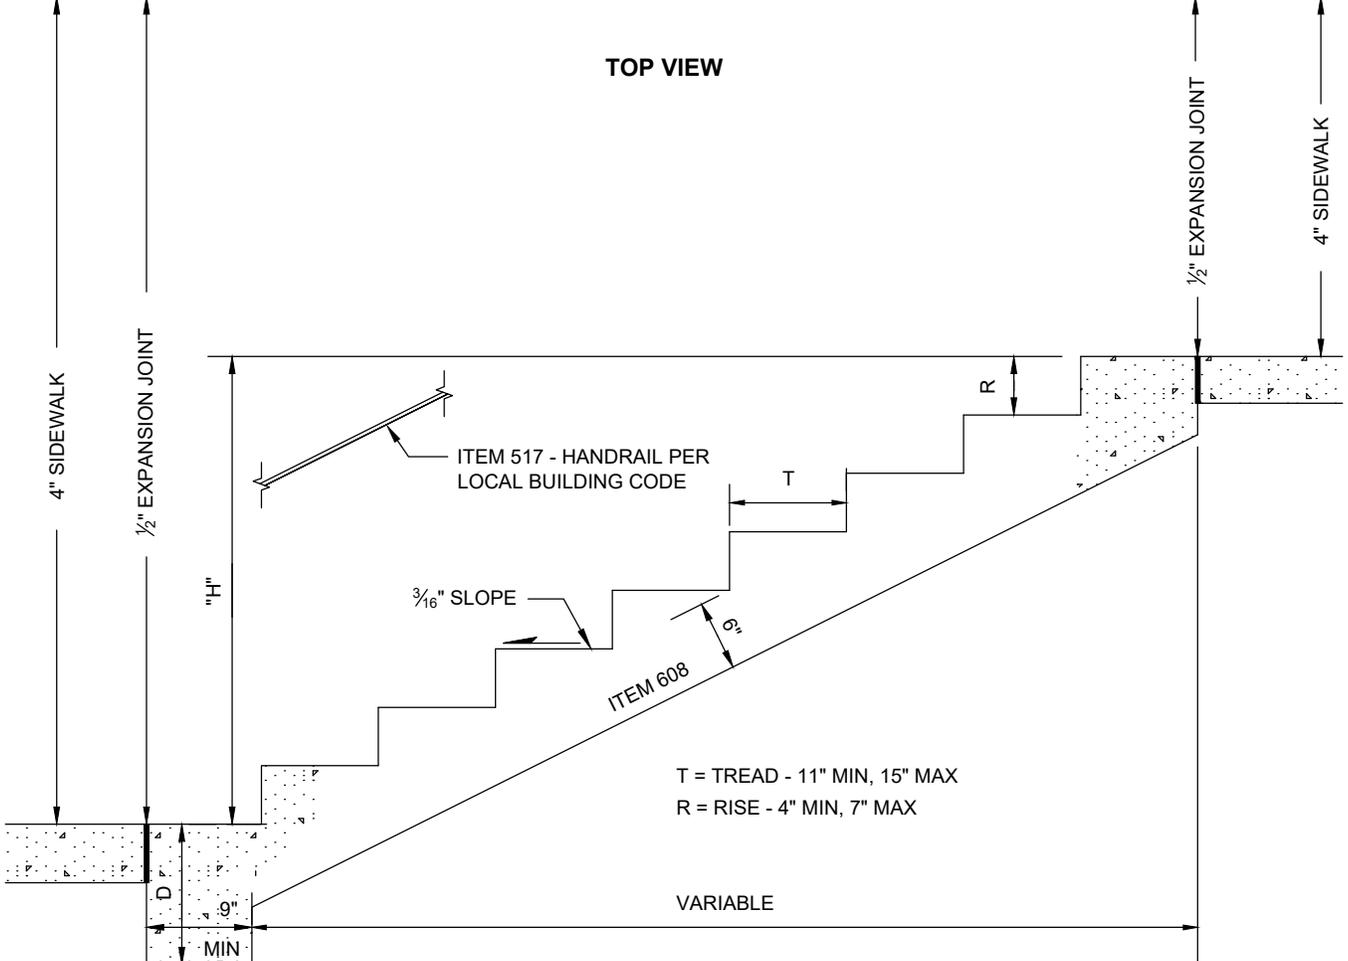

SECTION A-A
NO SCALE

FOR "H"=24" AND UNDER
SEE SHEET 2 OR 3

| NO. OF RISERS | "D" |
|---------------|-----|
| 4 | 8" |
| 5 | 10" |
| 6 | 10" |
| 7 | 12" |
| 8 | 12" |

STAIR TREADS AND RISERS SHALL BE OF EQUAL SIZE AND SHAPE. TOLERANCE BETWEEN THE LARGEST AND SMALLEST RISER HEIGHT OR BETWEEN THE LARGEST AND SMALLEST TREAD DEPTHS SHALL NOT EXCEED 3/8 INCHES.

CONCRETE STEPS


CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
2328


CITY ENGINEER

4/30/2018

SHT 1 OF 3

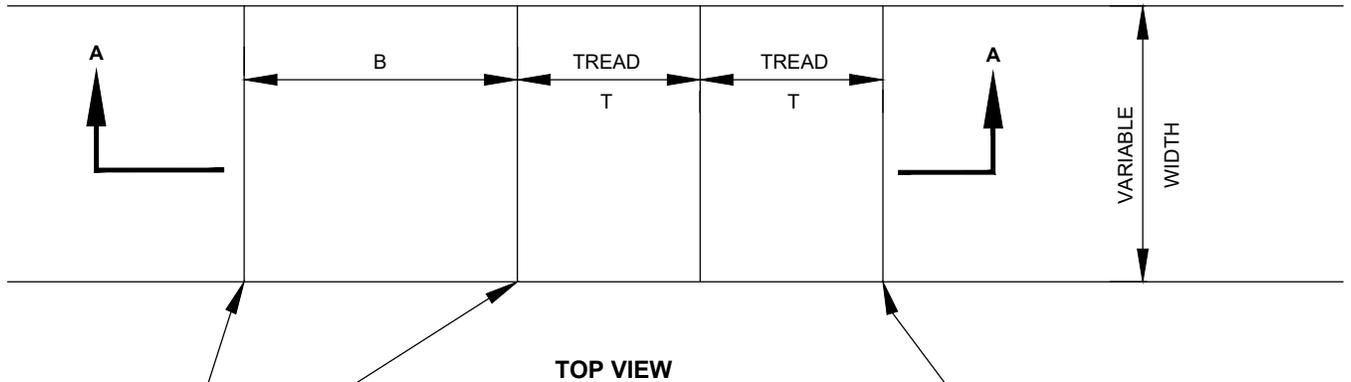

TOP VIEW

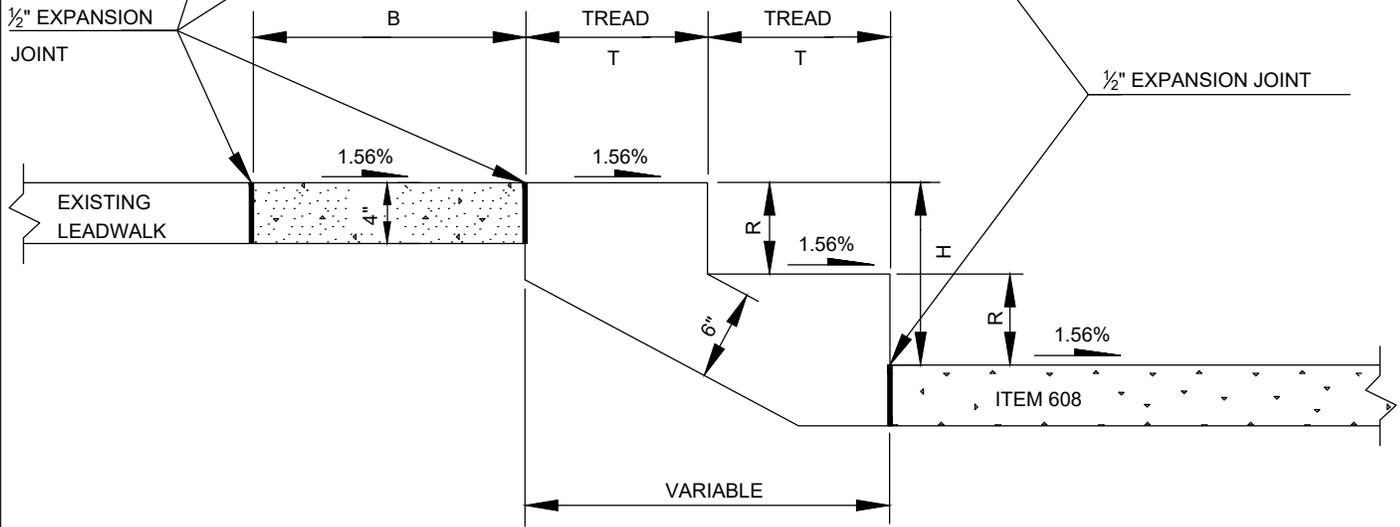

SECTION A-A

T = TREAD - 11" MIN, 15" MAX

R = RISER - 4" MIN, 7" MAX


IF "H" IS GREATER THAN 24", SEE SHT. 1 OF 3

STAIR TREADS AND RISERS SHALL BE OF EQUAL SIZE AND SHAPE. TOLERANCE BETWEEN THE LARGEST AND SMALLEST RISER HEIGHT OR BETWEEN THE LARGEST AND SMALLEST TREAD DEPTHS SHALL NOT EXCEED 3/8 INCHES.

CONCRETE STEPS

CITY OF COLUMBUS, OHIO
 DEPARTMENT OF PUBLIC SERVICE
 DIVISION OF DESIGN AND CONSTRUCTION

| |
|-------------|
| STD DWG |
| 2328 |
| 4/30/2018 |
| SHT 2 OF 3 |

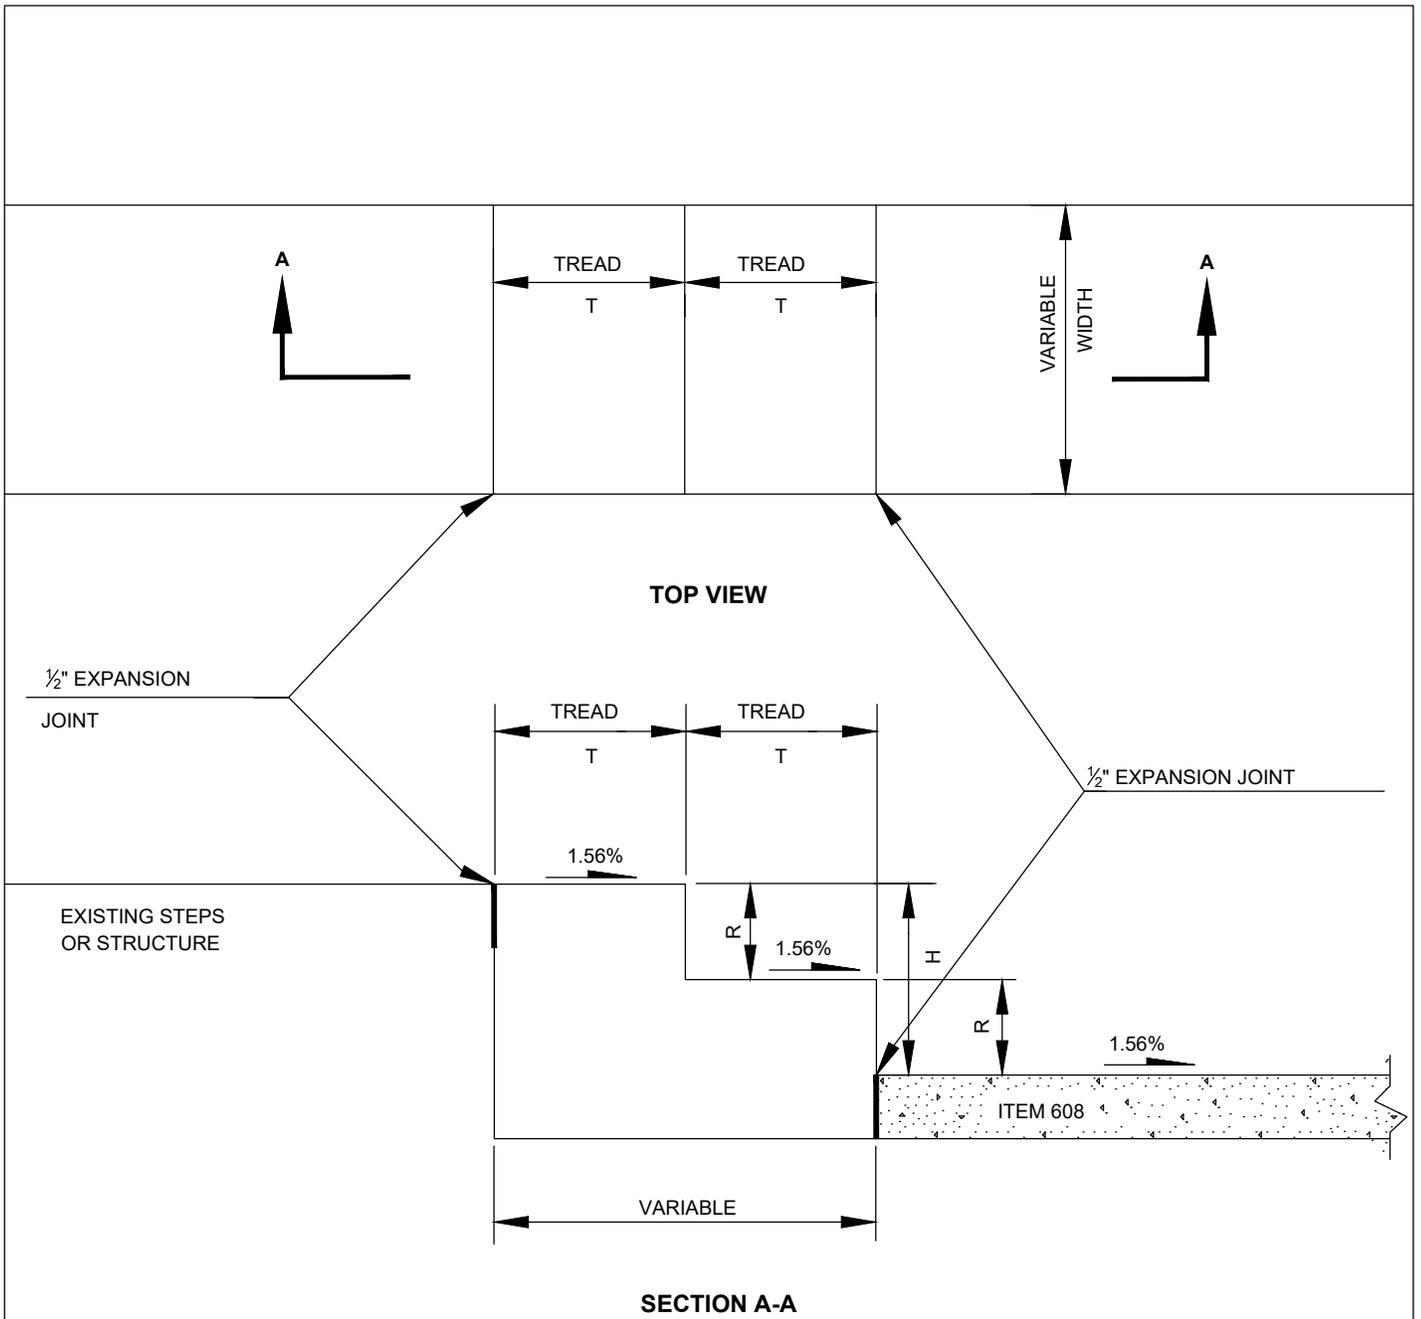

T = TREAD - 11" MIN, 15" MAX

R = RISER - 4" MIN, 7" MAX

IF "H" IS GREATER THAN 24", SEE SHT. 1 OF 3

THIS STANDARD DRAWING SHALL BE USED WHEN CONSTRUCTING A SMALL PORCH STOOP OR WHEN MEETING EXISTING STEPS.

STAIR TREADS AND RISERS SHALL BE OF EQUAL SIZE AND SHAPE. TOLERANCE BETWEEN THE LARGEST AND SMALLEST RISER HEIGHT OR BETWEEN THE LARGEST AND SMALLEST TREAD DEPTHS SHALL NOT EXCEED $\frac{3}{8}$ INCHES.

| | |
|---|---|
| <h2 style="margin: 0;">CONCRETE STEPS</h2> | |
| CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION | STD DWG 2328 4/30/2018 SHT 3 OF 3 |