


CONDUIT DIRECTIONALLY BORED OR DRILLED UNDER PAVEMENT

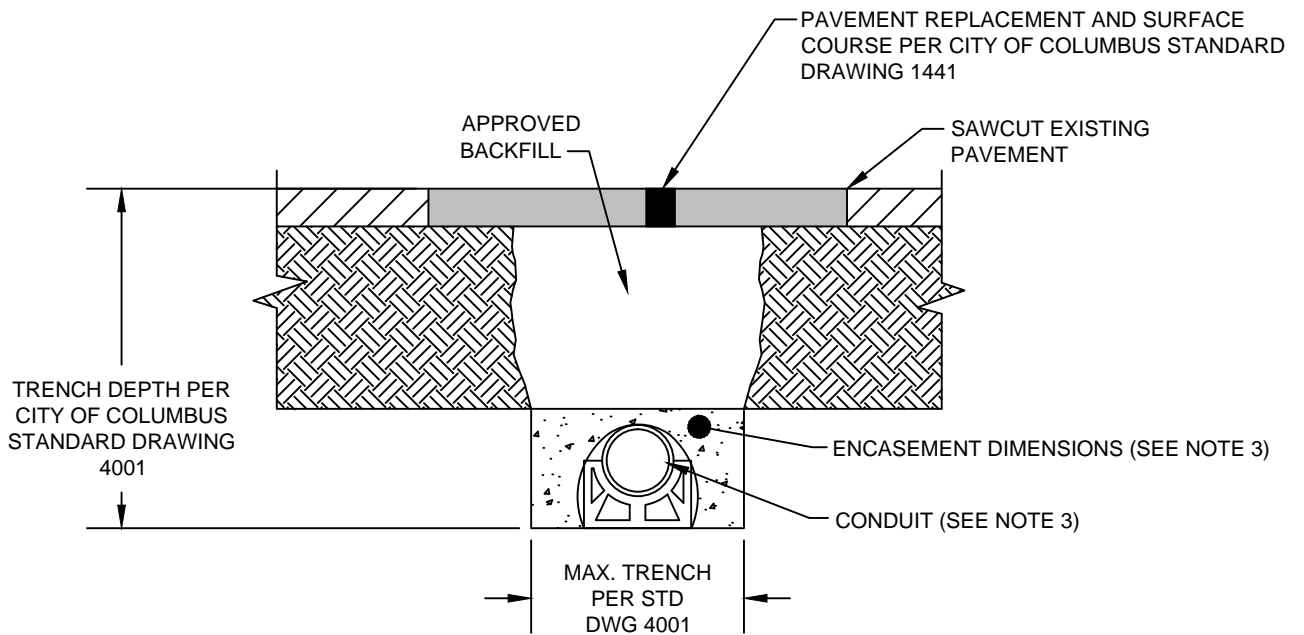


TRENCH IN PAVED AREA

NOTES:

1. CONDUIT THAT IS DRILLED/DIRECTIONALLY BORED SHALL BE (725.052, EPEC-80-HDPE) OR 725.20 SCHEDULE 80. JACKED CONDUIT SHALL BE RIGID METAL CONDUIT (725.04).
2. THE CONTRACTOR WITH THE APPROVAL OF THE ENGINEER OR AT THE DIRECTION OF THE PLANS OR THE ENGINEER SHALL POTHOLE THE PROPOSED JACKING/BORED AREA.
3. FOR TRAFFIC SIGNAL CONDUIT BANK AND CONDUIT SEE CITY OF COLUMBUS STANDARD DRAWING 4001.


<h1 style="margin: 0;">ROADWAY CONDUIT STANDARDS</h1>	
CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION	STD DWG 4000
	8/10/2017
CITY ENGINEER	SHT 1 OF 2

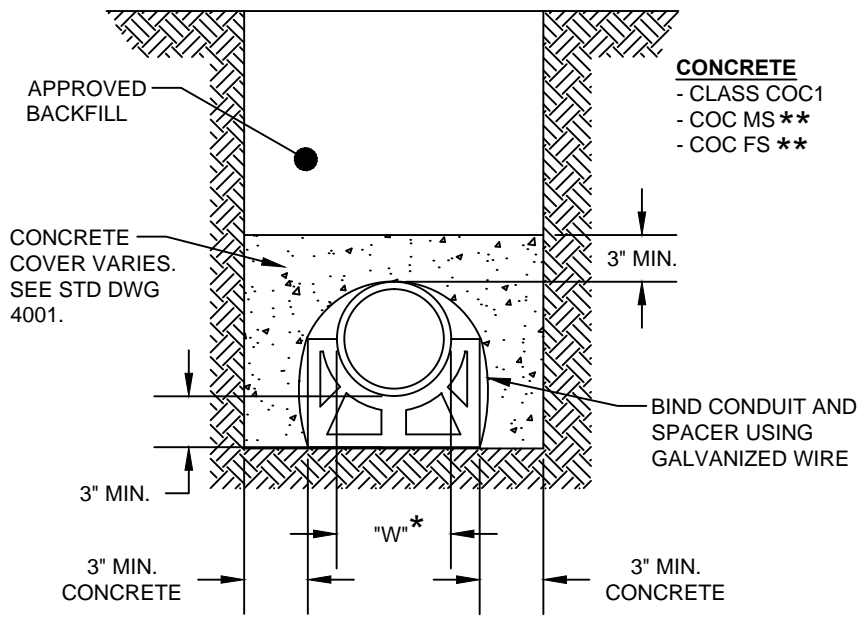

CONCRETE
 - CLASS COC1
 - COC MS**
 - COC FS**


* NOTE:
 "W" IS WIDTH OF
 CONDUIT.
 ** USE AS DIRECTED.

**TRENCH SECTION
 CONCRETE ENCASED CONDUIT**

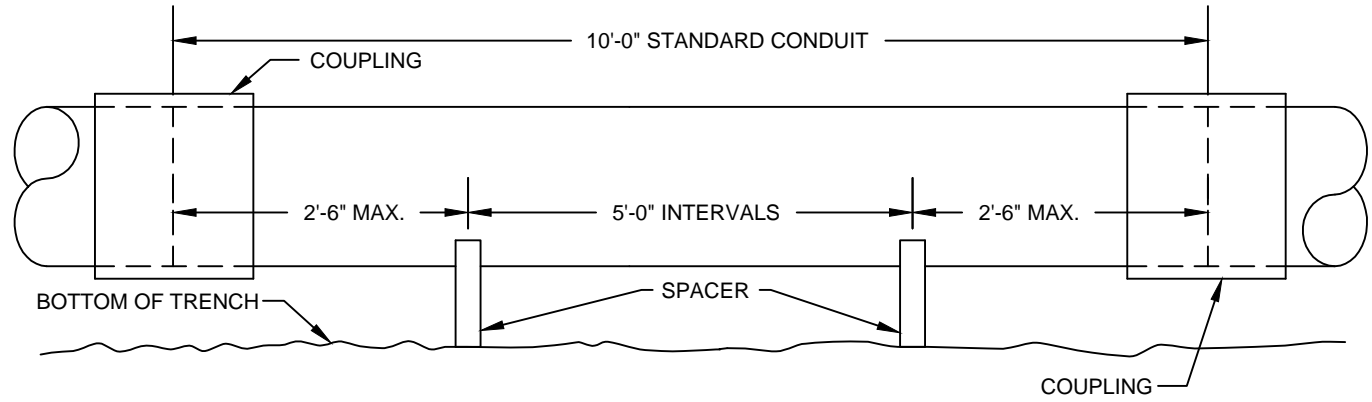

**SIDE ELEVATION
 CONCRETE ENCASED CONDUIT**

ROADWAY CONDUIT STANDARDS

CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC SERVICE DIVISION OF DESIGN AND CONSTRUCTION		STD DWG 4000
 CITY ENGINEER		8/10/2017
		SHT 2 OF 2