

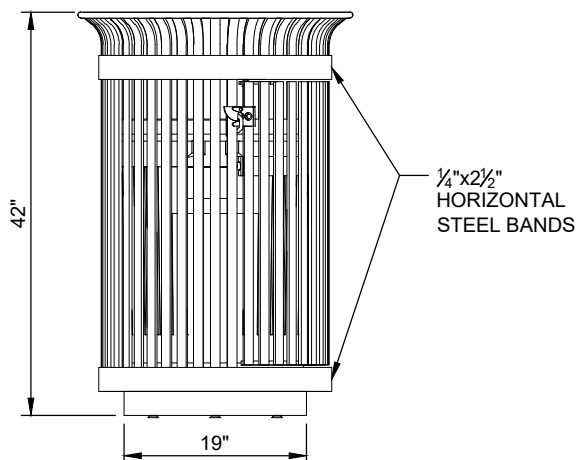
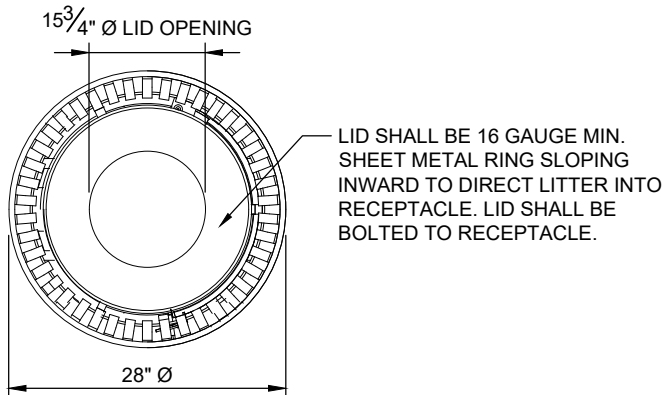
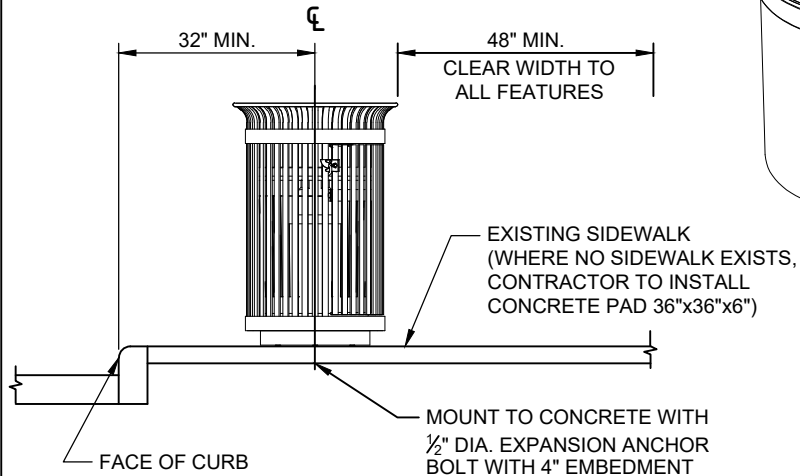


NOTES:

1. SHIPPING WEIGHT OF RECEPTACLE SHALL BE 280 LBS, MIN.
2. RECEPTACLE SHALL HAVE SIDE DOOR ACCESS. USE OIL IMPREGNATED BRONZE BUSHINGS AND STAINLESS STEEL PIVOT PINS FOR DOOR MOVEMENT, WITH 3/16" SOLID STEEL LATCH ASSEMBLY (NO LOCK).
3. ALL FABRICATED METAL COMPONENTS SHALL BE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS, 8-10 MILS THICK. ALL PARTS SHALL BE BLACK POWDER COATED.
4. RECEPTACLES SHALL NOT BE INSTALLED NEXT TO ON-STREET PARKING.
5. LINER SHALL BE BLACK HIGH-DENSITY POLYETHYLENE PLASTIC. PLASTIC LINER REINFORCED, RIBBED AND MOLDED FOR LONGER LIFE, MINIMUM HEIGHT 26-3/4" - MAXIMUM 27-1/4", DIAMETER MINIMUM 21-1/2" - MAXIMUM 21-3/4".

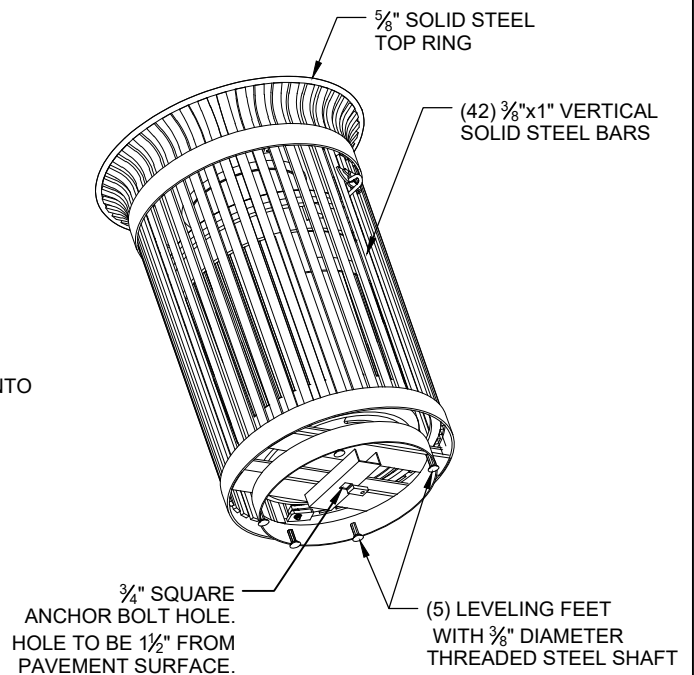

DOOR TO BE PLACED ON OPPOSITE SIDE OF TRAFFIC FLOW SUCH THAT REFUSE WORKER IS FACING ONCOMING TRAFFIC DURING LINER REMOVAL

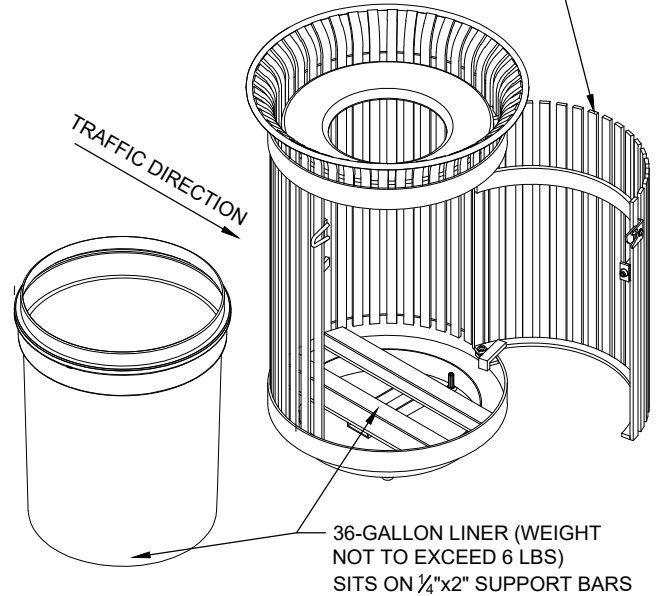

LITTER RECEPTACLE 36 GALLON CAPACITY

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG
2400

4/30/2018

CITY ENGINEER

SHT 1 OF 1