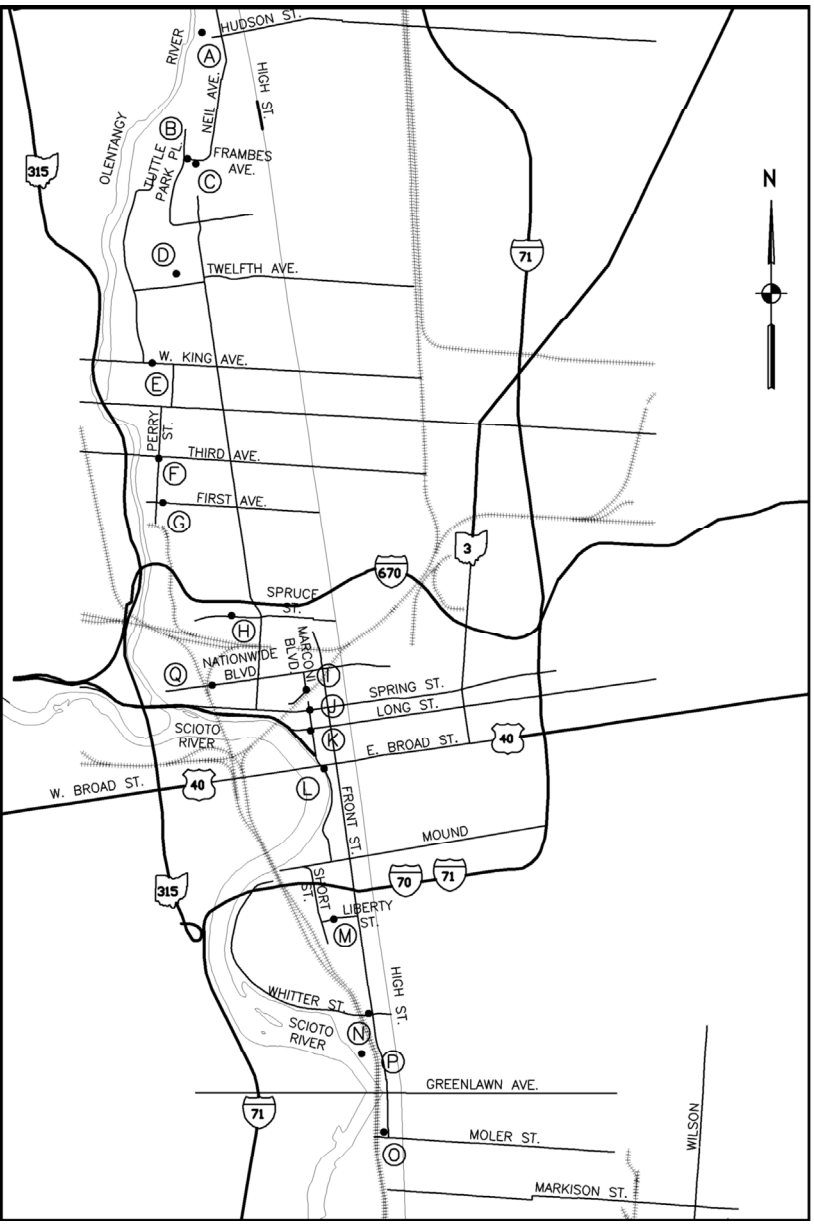

Ⓐ HUDSON ST. REGULATOR
Ⓑ DOE ALLEY REGULATOR
Ⓒ FRAMBES AVE. REGULATOR
Ⓓ INDIANOLA AVE. REGULATOR
Ⓔ KING AVE. REGULATOR
Ⓕ THIRD AVE. REGULATOR
Ⓖ FIRST AVE. REGULATOR
Ⓗ HENRY ST. REGULATOR
Ⓘ CHESTNUT ST. REGULATOR
Ⓙ SPRING ST. REGULATOR
Ⓚ LONG ST. REGULATOR
Ⓛ BROAD ST. REGULATOR
Ⓜ LIBERTY ST. REGULATOR
Ⓝ WHITTIER ST. REGULATOR
Ⓞ MOLER ST. REGULATOR
Ⓟ DSR 83/SLUDGE MANHOLE
Ⓠ MANHOLES 0002S0072 0002S0073

	Location	Remove Sluice Gate	Fill Catchment Area	Remove Electric Service	Remove Water Service	Remove / Replace Grating	Install Manhole Frame / Lid	Stop Plank Rehab.	Enlarge Orifice	Weir Raise / Raise Structure	Install Backflow Preventer	Install Monitoring Sensors / SCADA
A	HUDSON STREET REGULATOR	X	X				X					
B	DOE ALLEY REGULATOR	X	X									
C	FRAMBES AVENUE REGULATOR	X	X	X	X	X		X				
D	INDIANOLA AVENUE REGULATOR	X	X			X	X	X				
E	KING AVENUE REGULATOR	X	X									
F	THIRD AVENUE REGULATOR	X	X	X	X	X		X				
G	FIRST AVENUE REGULATOR	X	X									
H	HENRY STREET REGULATOR	X	X	X	X	X	X	X	X			
I	CHESTNUT STREET REGULATOR	X	X			X		X	X			
J	SPRING STREET REGULATOR	X	X	X	X	X						
K	LONG STREET REGULATOR	X	X	X	X	X		X	X			
L	BROAD STREET REGULATOR	X	X	X	X	X		X	X			
M	LIBERTY STREET REGULATOR	X		X	X	X						
N	WHITTIER STREET REGULATOR	X	X	X	X	X		X				
O	MOLER STREET REGULATOR	X	X	X	X	X		X				
P	DSR 83 / SLUDGE MANHOLE WSST						X			X		X
Q	NATIONWIDE BLVD AND FLETCHER (Manholes 0002S0072 and 0002S0073)										X	
	Total	15	15	9	9	11	4	9	4	1	1	1