

18" WIDE HIGH INTENSITY
WRAP-AROUND REFLECTIVE SHEETING
PLACED 2 INCHES FROM THE TOP OF
POST
RED - NO OUTLET
YELLOW - OTHER

TREATED 4" X 4" (NOMINAL SIZE)
WOOD POST

$\frac{3}{4}$ " DEEP SAW CUT
ALONG ALL FOUR SIDES

6"

2"

EARTH

1 $\frac{1}{2}$ " GALVANIZED
STEEL LAG BOLTS
(2 REQ.)

STEEL TUBING
4" X 4" X $\frac{3}{16}$ "
(PAINT WITH RUST
INHIBITOR)

4'-0" MINIMUM

5'-8"

3'-0"

TYPE - A
FOR USE IN AREAS OPEN
TO PEDESTRIAN TRAFFIC

BREAK-AWAY BOLLARD

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION


STD DWG
2195

CITY ENGINEER

3/30/2018

SHT 1 OF 2

INSTALL TYPE 4 OBJECT MARKER
OM4-3-18 FOR END OF ROADWAY OR IN
AREAS WHERE NO ALTERNATE
VEHICULAR PATH EXISTS.
INSTALL TYPE 1 OBJECT MARKER
OM3-1-18 FOR OBSTRUCTION WITHIN
THE ROADWAY.
INSTALL ONE SIGN FACING VEHICULAR
OR PEDESTRIAN TRAFFIC.

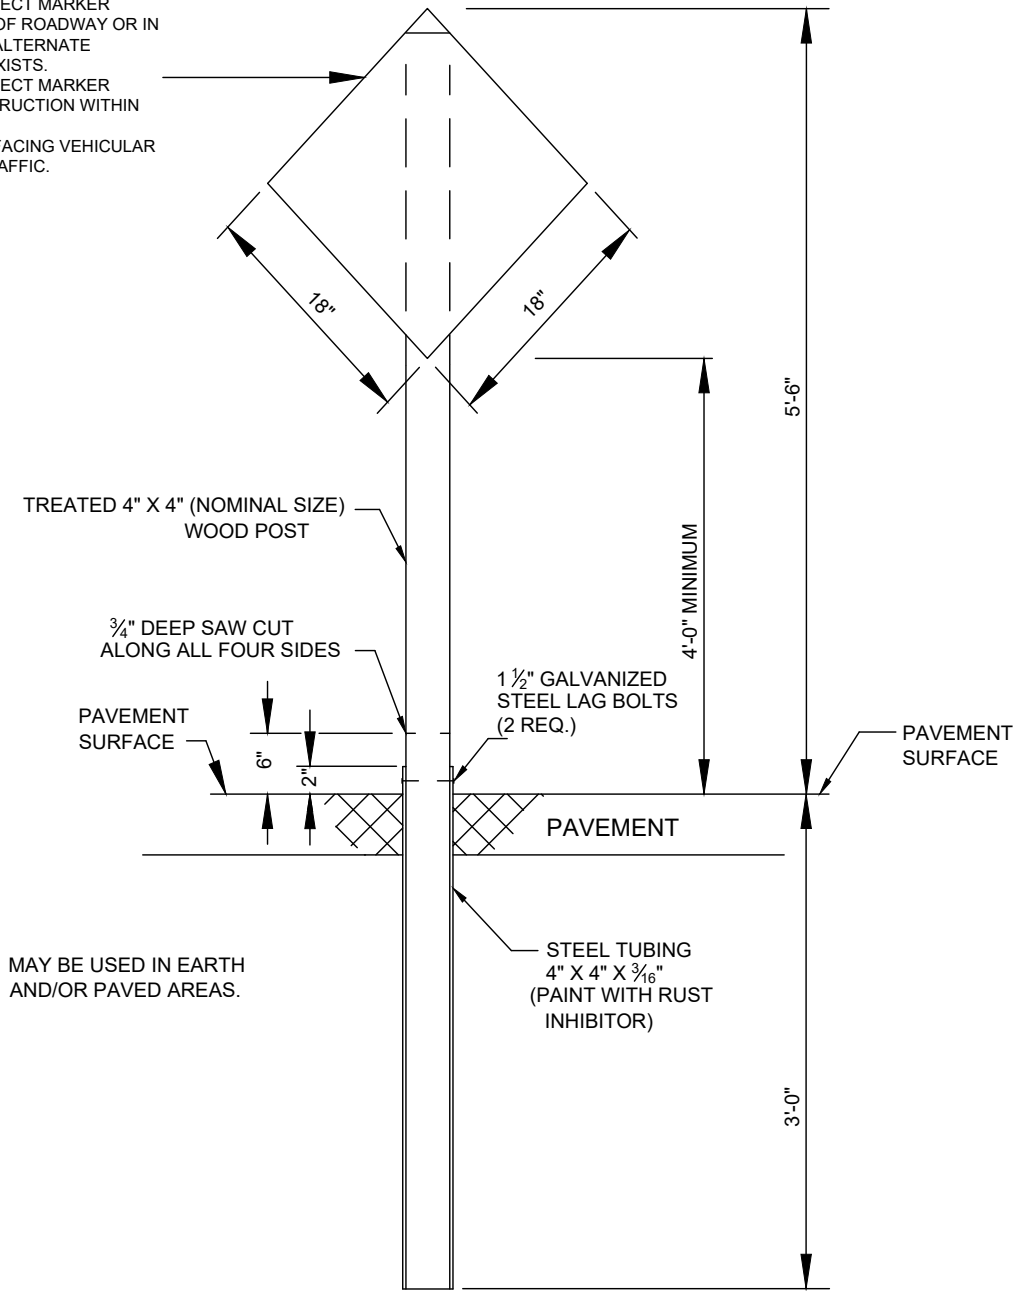

TYPE - B
FOR USE IN LIMITED ACCESS AREAS

BREAK-AWAY BOLLARD

CITY OF COLUMBUS, OHIO
DEPARTMENT OF PUBLIC SERVICE
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

2195

3/30/2018

SHT 2 OF 2